# Service part catalogue

## SelfCookingCenter® whitefficiency®
## SelfCooking Center 202 - 20 x 2/1 GastronormG


**G22SH1111**



16.02.2012
2 AC208V (240V) 60Hz UL

CD-Ges_101207
©Copyright by RATIONAL Technical Service
All Rights reserved


# SelfCookingCenter® whitefficiency®

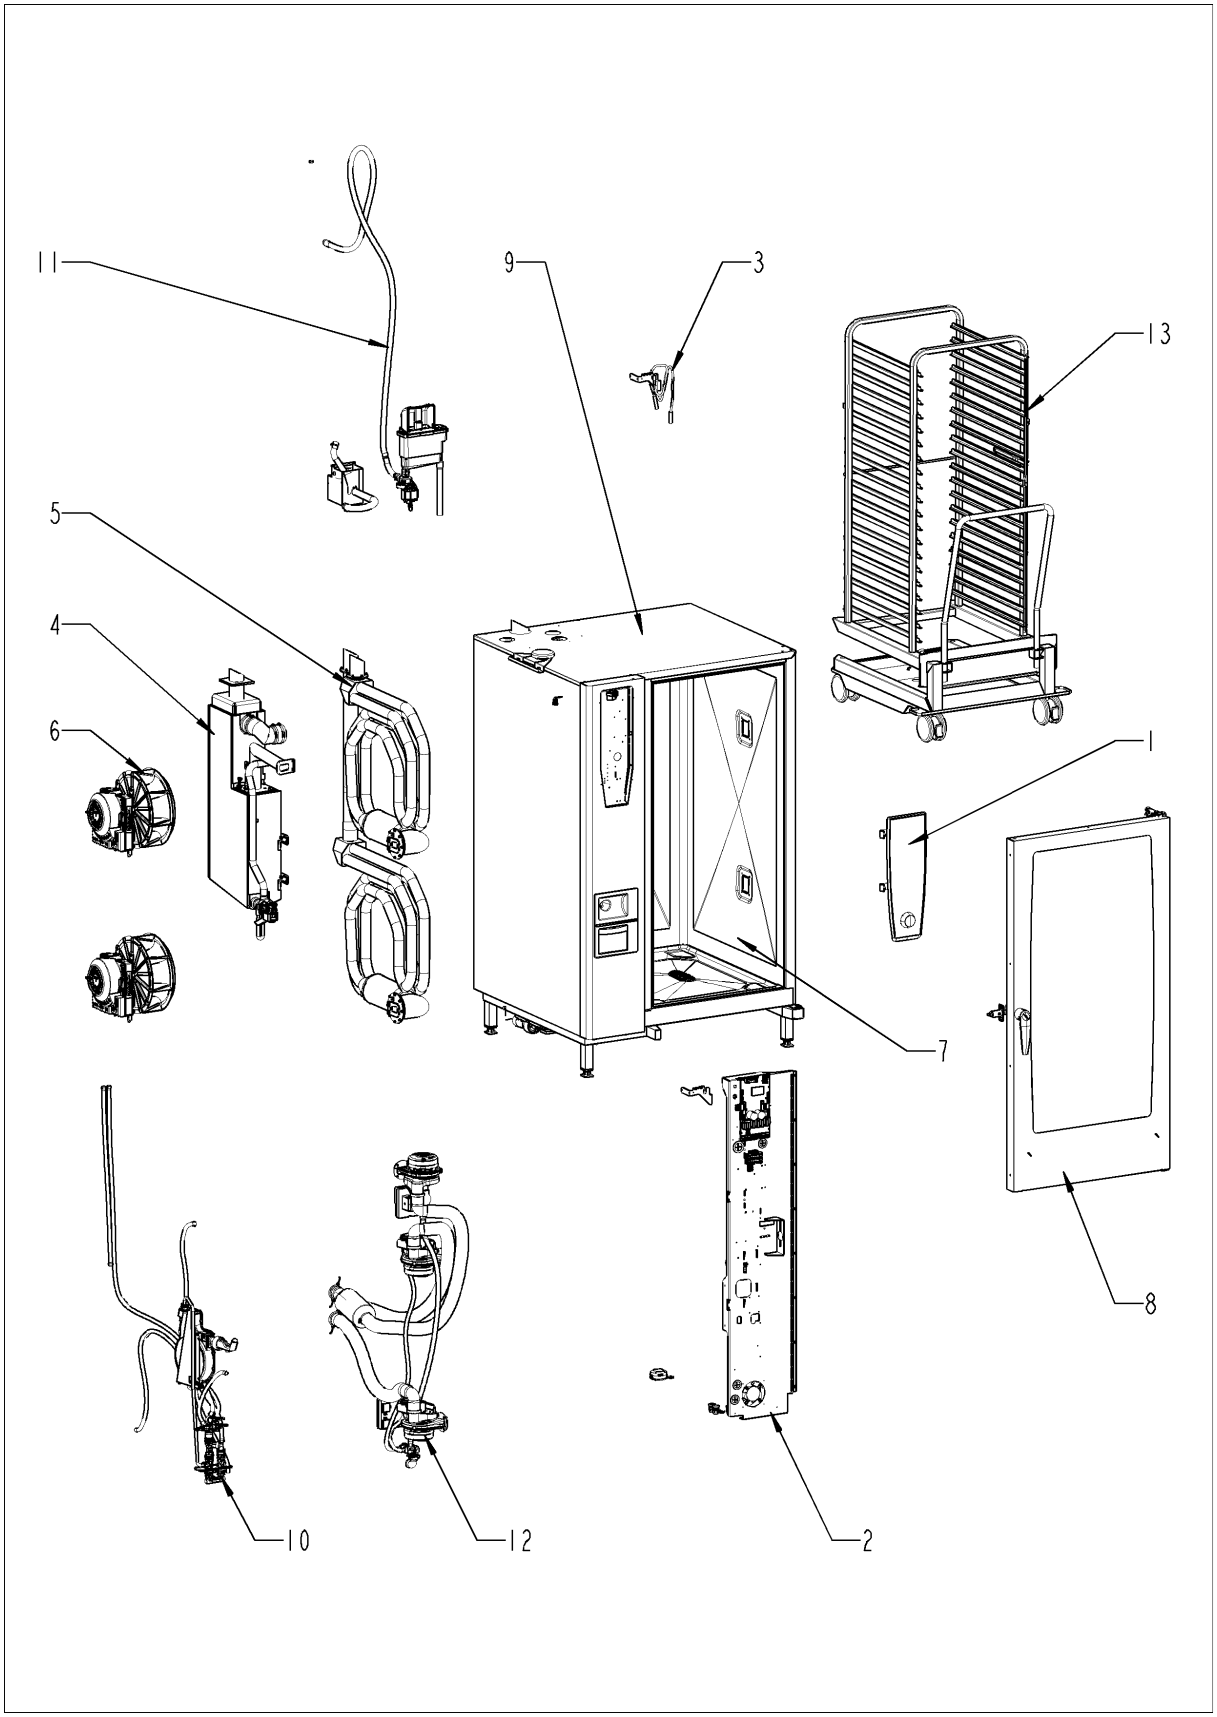

# SelfCookingCenter® whitefficiency®

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | | Control panel | 1 |
| 2 | | Electrical installation | 1 |
| 3 | | ClimaPlus | 1 |
| 4 | | Steam generator | 1 |
| 5 | | Hot air heating | 1 |
| 6 | | Motor and fan wheel | 1 |
| 7 | | Interior cabinet | 1 |
| 8 | | Door | 1 |
| 9 | | Exterior cabinet | 1 |
| 10 | | Water | 1 |
| 11 | | CleanJet + Care | 1 |
| 12 | | Gas parts | 1 |
| 13 | | Standard accessory | 1 |


# Control panel

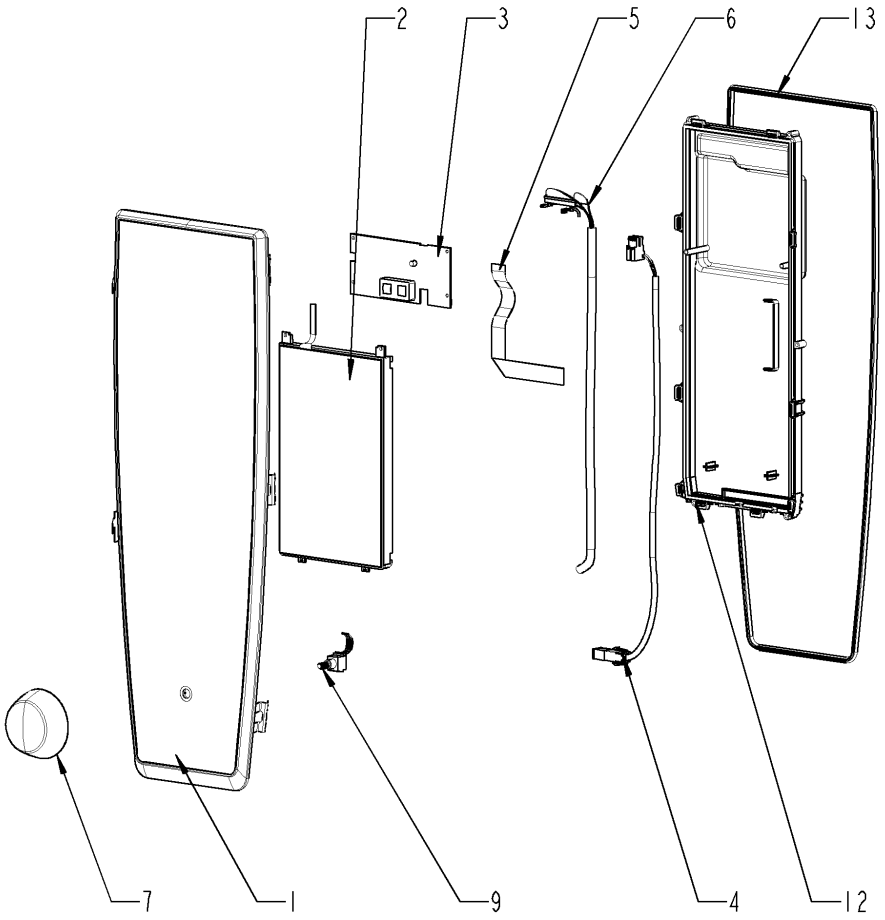

# Control panel

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 87.01.005 | Control panel insert with overlay *RAT* | 1 |
| 2 | 42.00.112 | Control pcb *TFT* | 1 |
| 3 | 42.00.081 | MMI pcb | 1 |
| 4 | 40.03.467 | Cable On-Off switch MMI | 1 |
| 5 | 40.03.515 | Cable MMI - TFT | 1 |
| 6 | 40.03.516 | Cable MMI - CPU | 1 |
| 7 | 16.02.062 | Dial f. pulse generator | 1 |
| 9 | 40.00.404 | Pulse generator | 1 |
| 12 | 16.01.910 | Cover f. control pcb w. gasket | 1 |
| 13 | 16.01.908 | Sealing f. panel insert | 1 |


# Electrical installation

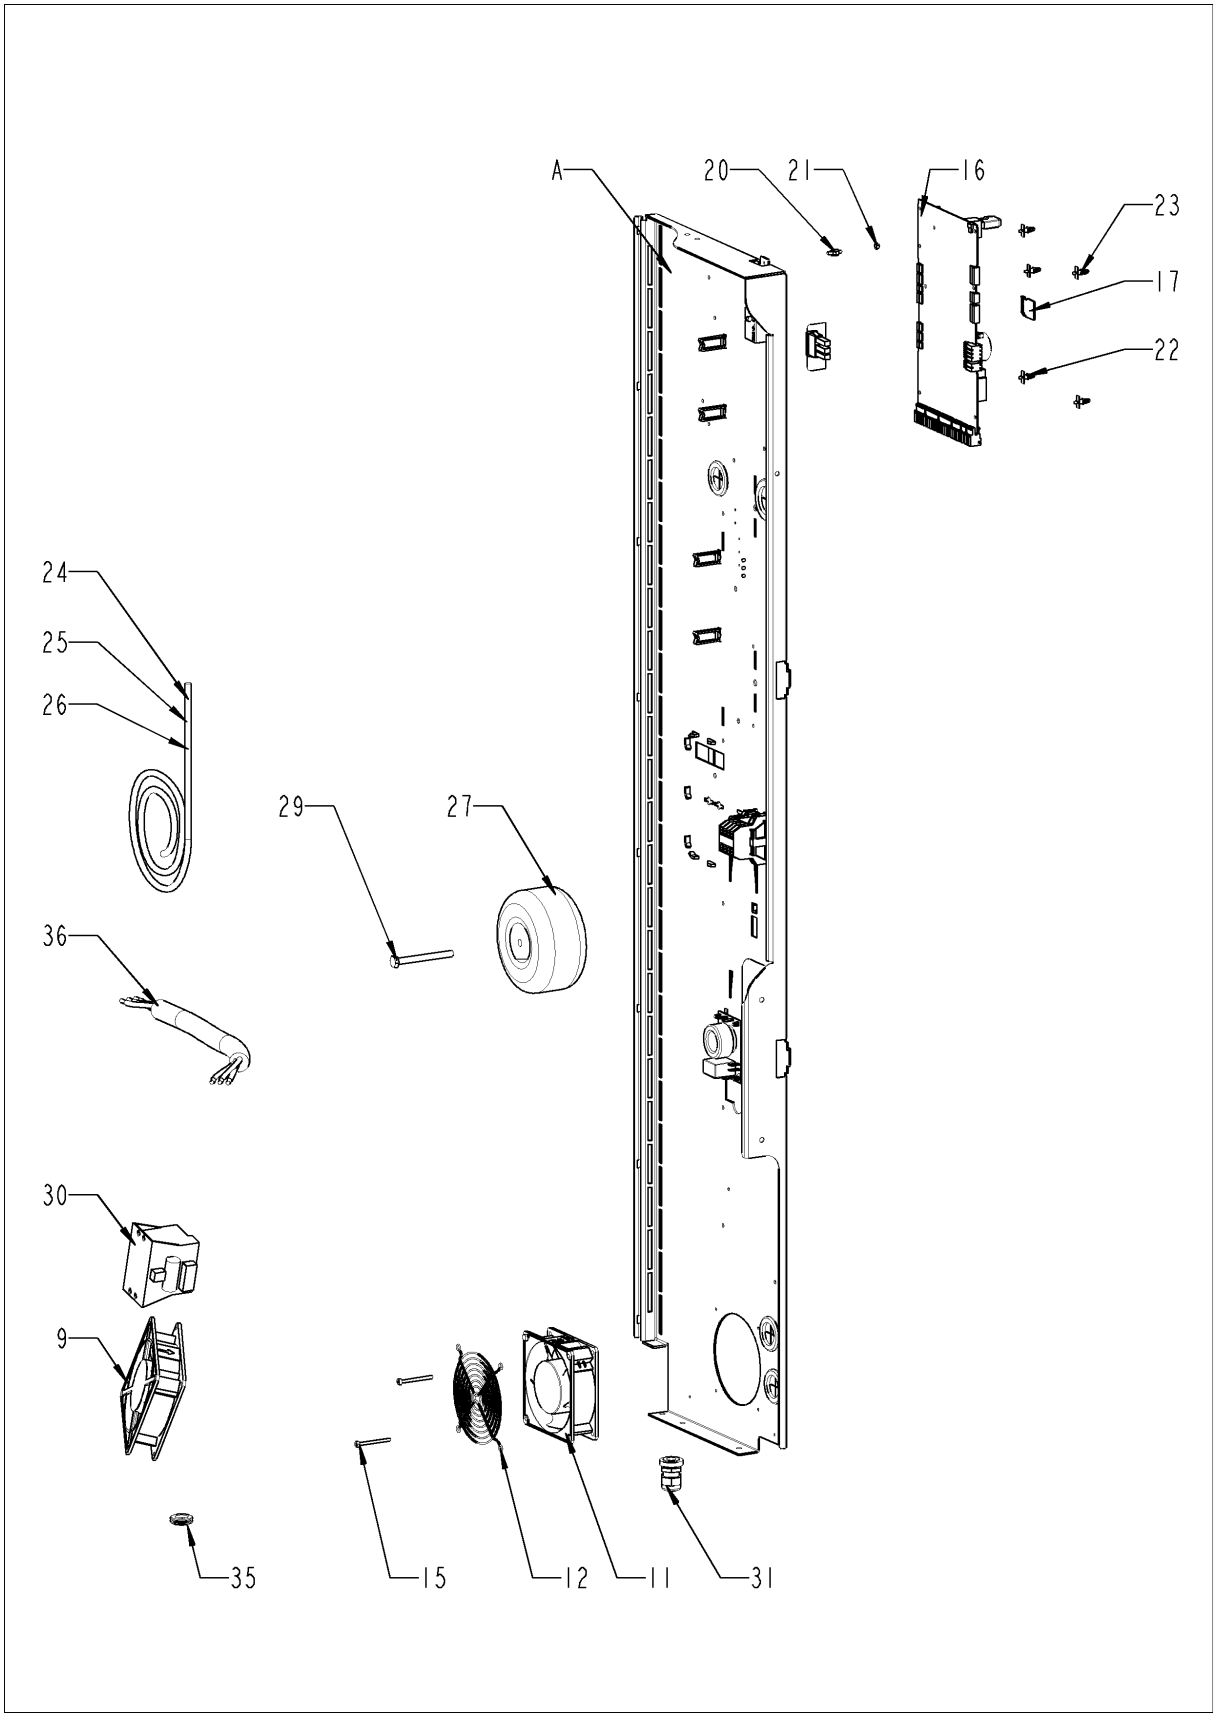

# Electrical installation

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 9 | 40.03.948 | Cooling fan with NTC | 1 |
| 11 | 40.03.425 | Cooling fan | 1 |
| 12 | 2005.0106 | Protective grid for cooling fan | 1 |
| 15 | 10.00.564 | Pan head screw Torx T20 M4x45 | 2 |
| 16 | 42.00.160 | Control pcb | 1 |
| 17 | 42.00.128 | SD-memory card 4GB | 1 |
| 20 | 10.00.243 | Spacer M4x8 | 1 |
| 21 | 1104.0121 | Hex nut M4 self locking | 1 |
| 22 | 40.03.756 | Fixing clip f. pcb | 1 |
| 23 | 40.03.533 | Fixing clip f. pcb | 4 |
| 24 | 40.04.089 | Bus cable 1.15m | 1 |
| 25 | 40.03.995 | Bus cable 0.85m | 1 |
| 26 | 40.03.996 | Bus cable 1.15m | 1 |
| 27 | 40.03.468 | Power transformer | 1 |
| 29 | 10.00.445 | Hex screw M8x80 | 1 |
| 30 | 40.03.772 | Transformer f. cooling fan | 1 |
| 31 | 40.00.320 | Cable connection M20x1.5 | 1 |
| 35 | 40.03.989 | Loudspeaker K 64 WPT | 1 |
| 36 | 40.01.596 | Power supply cable 3x2,5mm² 3m | 1 |
| 38 | 40.03.995 | Bus cable 0.85m | 1 |
| A | | Electrical installation | 1 |


# Electrical installation

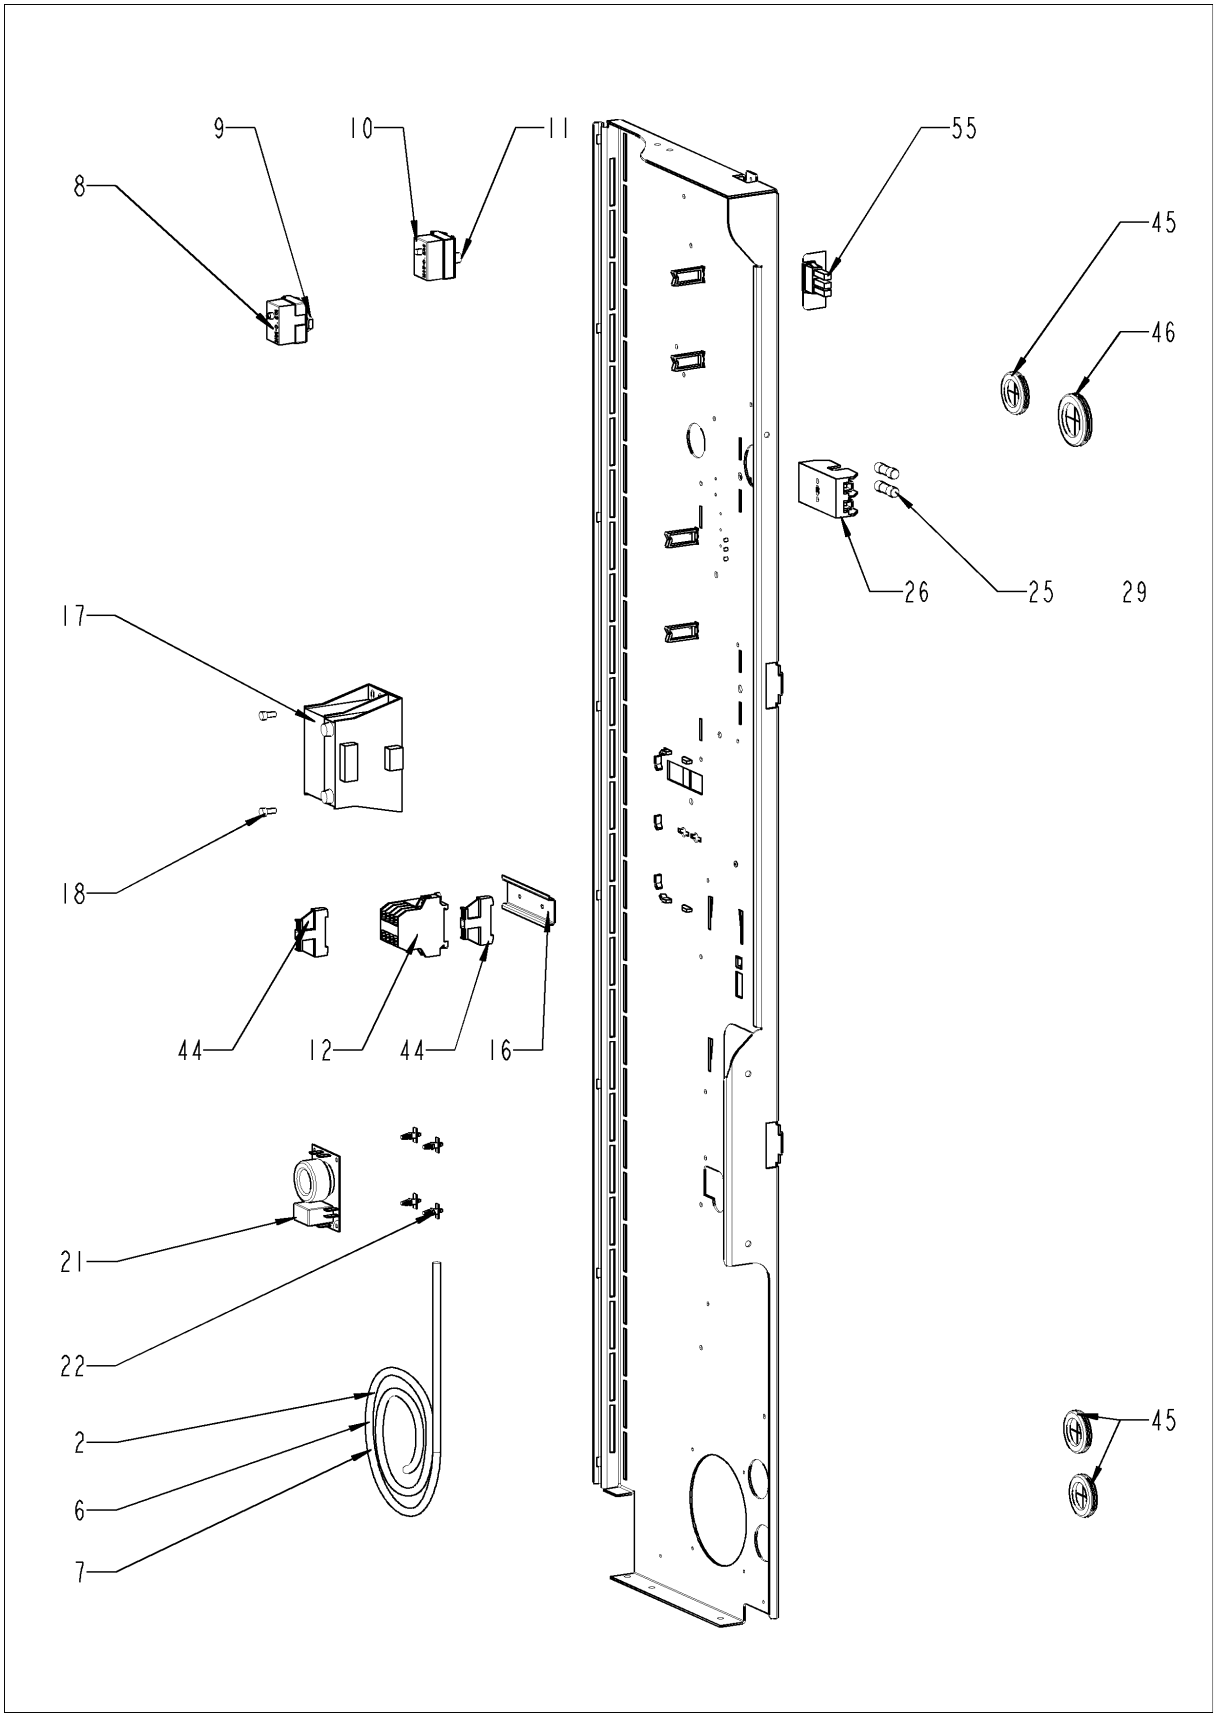

# Electrical installation

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 6 | 40.03.453 | Cable control harness | 1 |
| 7 | 40.04.116 | Cable harness isolating transformer | 1 |
| 8 | 40.02.515 | Dry up protector 315°F/157°C | 1 |
| 9 | 3014.0302 | Hex nut M10 for dry-up protector | 1 |
| 10 | 40.01.482 | Safety temperature limiter 365°C | 1 |
| 11 | 3014.0327 | Hex nut M10x1,0 | 1 |
| 12 | 40.03.761 | Contactor 3TG1010-3AK2 | 1 |
| 16 | 40.03.290 | Installation rail for Contactor | 1 |
| 17 | 40.03.348 | Control transformer T1 | 1 |
| 18 | 10.01.065 | Hex nut M5 | 1 |
| 20 | 10.00.709 | Hex nut M6 w. locking | 1 |
| 21 | 40.01.483 | Electronic noise filter | 1 |
| 22 | 40.01.579 | Fixing clip f. pcb | 4 |
| 25 | 40.01.873 | Fuse SC-15A 10x38 | 2 |
| 26 | 40.02.512 | Fuse holder 2x6.3A | 1 |
| 26 | 40.01.487 | Fuse holder 2pol | 1 |
| 29 | 10.00.365 | Pan head screw Torx M3x20 | 2 |
| 45 | 4007.0620 | Membrane DGC 29 | 3 |
| 46 | 4007.0621 | Membrane DGC 36 | 1 |


# ClimaPlus

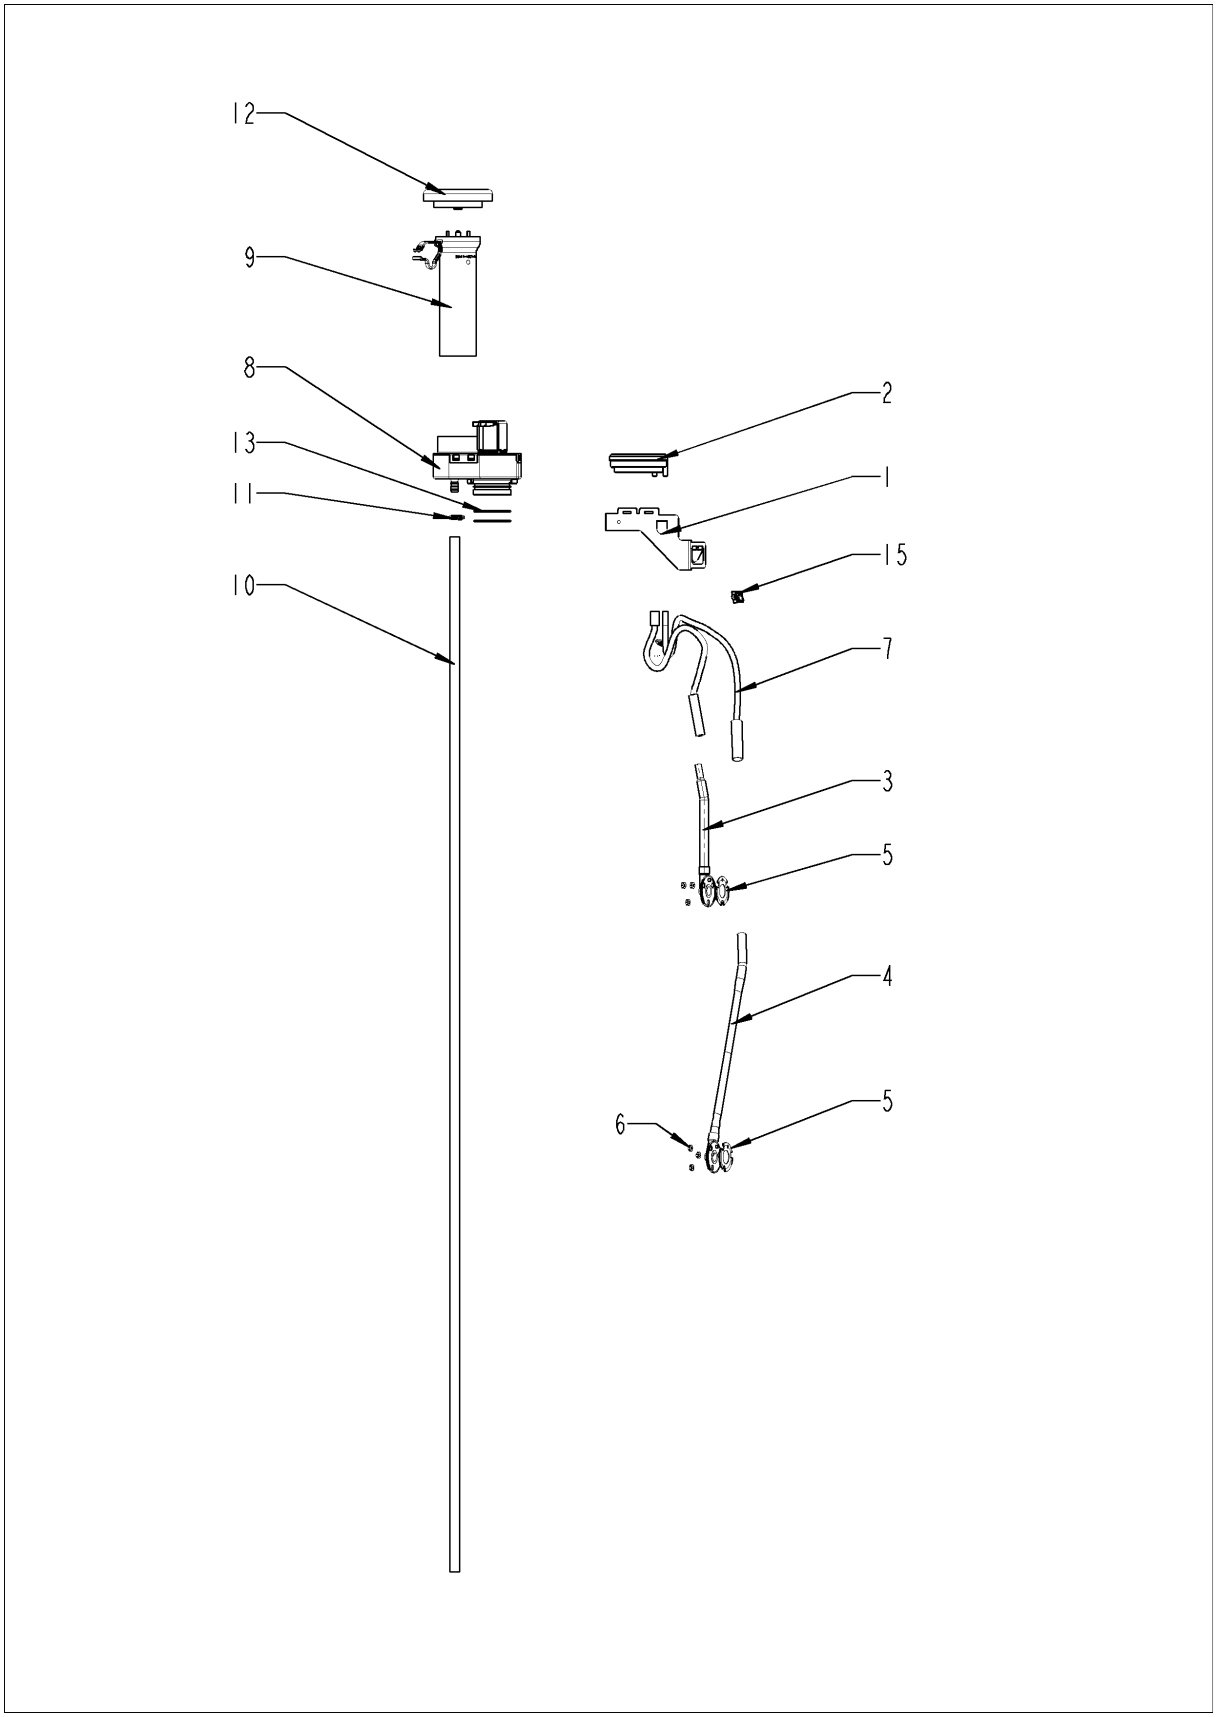

# ClimaPlus

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 22.00.882 | Mounting device f. pressure sensor | 2 |
| 2 | 3017.1011 | Pressure sensor for humidity control Huba 401 | 1 |
| 3 | 22.00.908 | Inner humidity meas. Piece | 1 |
| 4 | 22.00.850 | Outer humidity meas. Piece | 1 |
| 5 | 22.00.881 | Gasket f. hum. meas. Pipe | 2 |
| 6 | 1104.0122 | Hex combination nut M4 galv | 6 |
| 7 | 22.00.525 | Hose set f. humidity control | 1 |
| 8 | 22.00.725 | Humidity control cpl. | 1 |
| 9 | 22.00.916 | Air inlet pipe | 1 |
| 10 | 22.00.958 | Drain hose for humidity control | 1 |
| 11 | 2066.0527 | Hose clamp ø14mm | 2 |
| 12 | 22.00.767 | Vent cover | 1 |
| 13 | 22.00.837 | O-ring for humidity control | 2 |
| 15 | 10.00.111 | Cable clip long | 2 |


# Steam generator

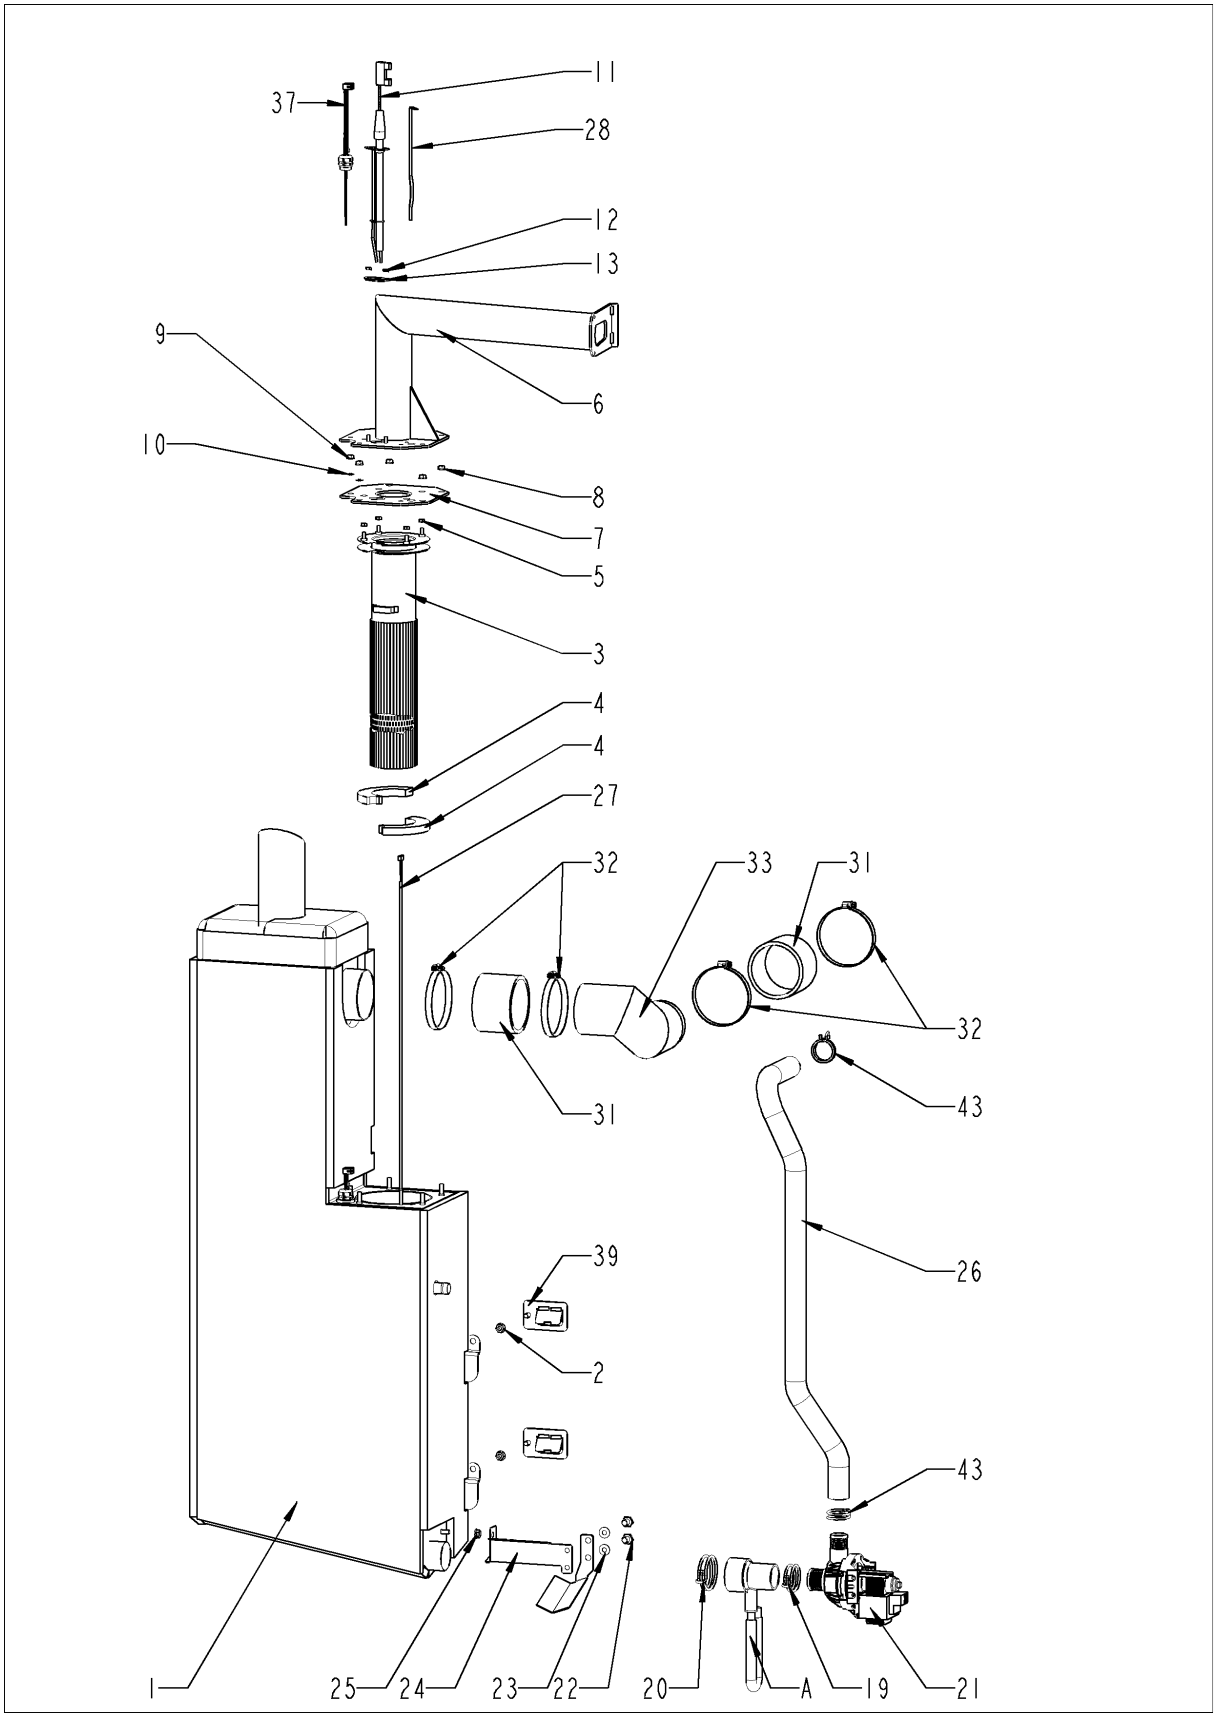

# Steam generator

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 44.00.948 | Steam generator insolated | 1 |
| 2 | 10.00.709 | Hex nut M6 w. locking | 2 |
| 3 | 72.00.088 | Burner steam gen. | 1 |
| 4 | 72.00.077 | Insulation f. burner steam gen. | 2 |
| 5 | 1104.0122 | Hex combination nut M4 galv | 4 |
| 6 | 70.00.472 | Burner pipe | 1 |
| 7 | 72.00.067 | Gasket f. burner carrier | 1 |
| 8 | 1105.0121 | Hex combination nut M5 galv | 3 |
| 9 | 1105.0120 | Hex nut M5 | 2 |
| 10 | 1205.0120 | Tooth lock washer A5,3 | 2 |
| 11 | 44.01.237 | Ignition electrode steam generator | 1 |
| 12 | 1104.0120 | Hex nut M4 | 2 |
| 13 | 44.00.250 | Gasket f. ignition electrode | 1 |
| 19 | 2066.0519 | Hose clamp 35,6mm | 1 |
| 20 | 2066.0526 | Hose clamp ø46mm | 1 |
| 21 | 44.00.207 | Emptying pump | 1 |
| 22 | 1006.0762 | Hex screw M6x10 | 2 |
| 23 | 1306.0222 | Washer A6,4x15x1,5 | 2 |
| 24 | 44.01.248 | Fixing device f. pump steam generator | 1 |
| 25 | 10.00.709 | Hex nut M6 w. locking | 2 |
| 26 | 44.01.231 | Drain hose steam generator | 1 |
| 27 | 40.04.110 | Thermocouple steam generator *B5* | 1 |
| 28 | 44.00.517 | Fixing plate steam generator thermostat | 1 |
| 31 | 44.00.362 | Steam hose 70x5 | 2 |
| 32 | 2066.0516 | Hose clamp 60-80 mm | 4 |
| 33 | 44.01.086 | Steam pipe | 1 |
| 37 | 44.01.371 | Filling level electrode 135mm | 1 |
| 39 | 44.01.181 | Fixing angle steam generator | 2 |
| 43 | 2066.0518 | Hose clamp 30mm | 2 |
| A | 8354.1320 | Pump connection spout cpl. | 1 |


# Pump connection spout

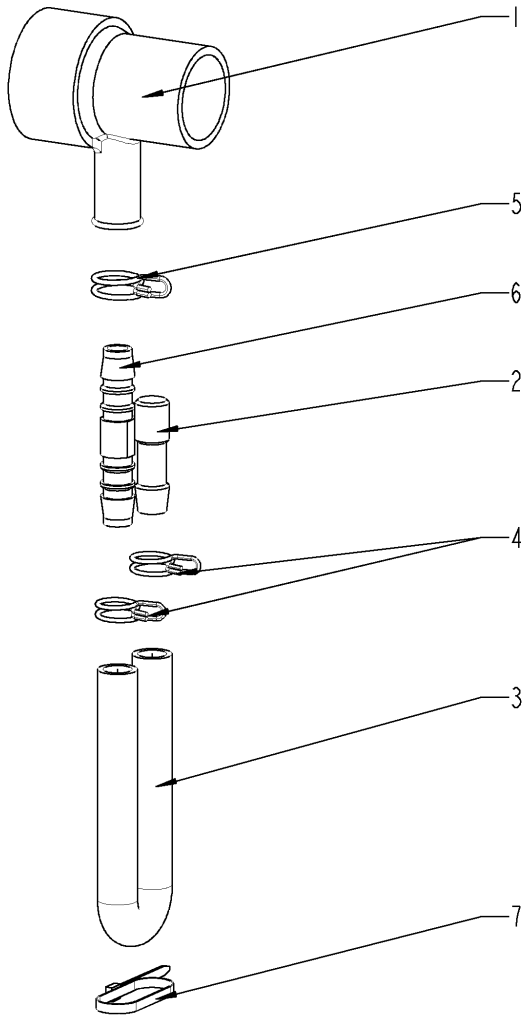

# Pump connection spout

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 2118.1000 | Pump connection spout | 1 |
| 2 | 2120.1259 | Stop plug 10mm | 1 |
| 3 | 2110.1008 | Silicon hose ø10x2mm | 1 |
| 4 | 2066.0527 | Hose clamp ø14mm | 2 |
| 5 | 2066.0530 | Hose clamp ø16.4mm | 1 |
| 6 | 2062.0331 | Junction pressure hose GS 10 | 1 |
| 7 | 4005.0101 | Tie rap 145 mm | 1 |


# Hot air heating

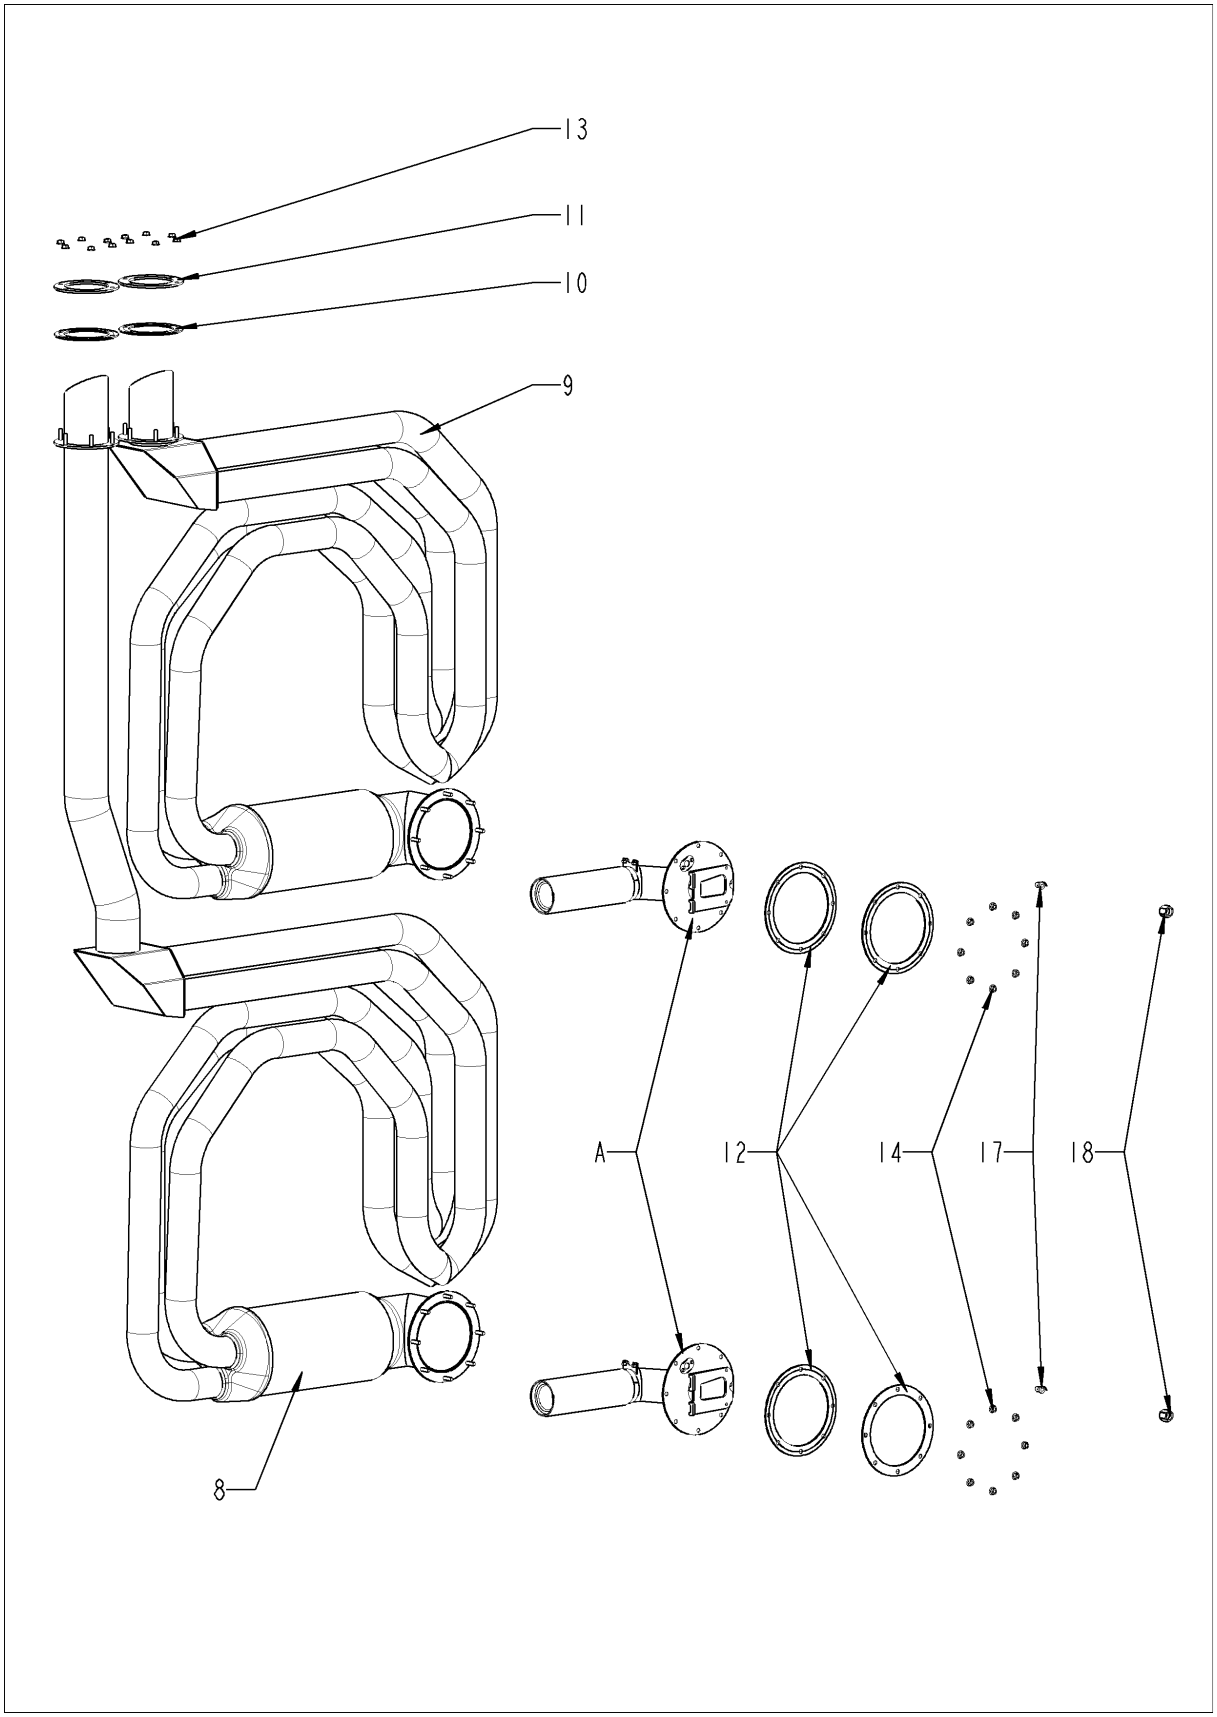

# Hot air heating

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 8 | 74.00.806 | Hot air heat exchanger below | 1 |
| 9 | 74.00.802 | Hot air heat exchanger top | 1 |
| 10 | 74.00.869 | Gasket hot air heat exchanger/interior cabinet | 2 |
| 11 | 74.00.868 | Mating flange heat exchanger | 2 |
| 12 | 74.00.296 | Gasket f. heat exchanger below | 4 |
| 13 | 10.01.065 | Hex nut M5 | 12 |
| 14 | 10.01.065 | Hex nut M5 | 16 |
| 17 | 50.01.471 | Nozzle f. moistening | 2 |
| 18 | 50.00.846 | Union nut M12x13.2 N | 2 |
| A | 74.00.830 | Burner hot air | 2 |


# Burner hot air

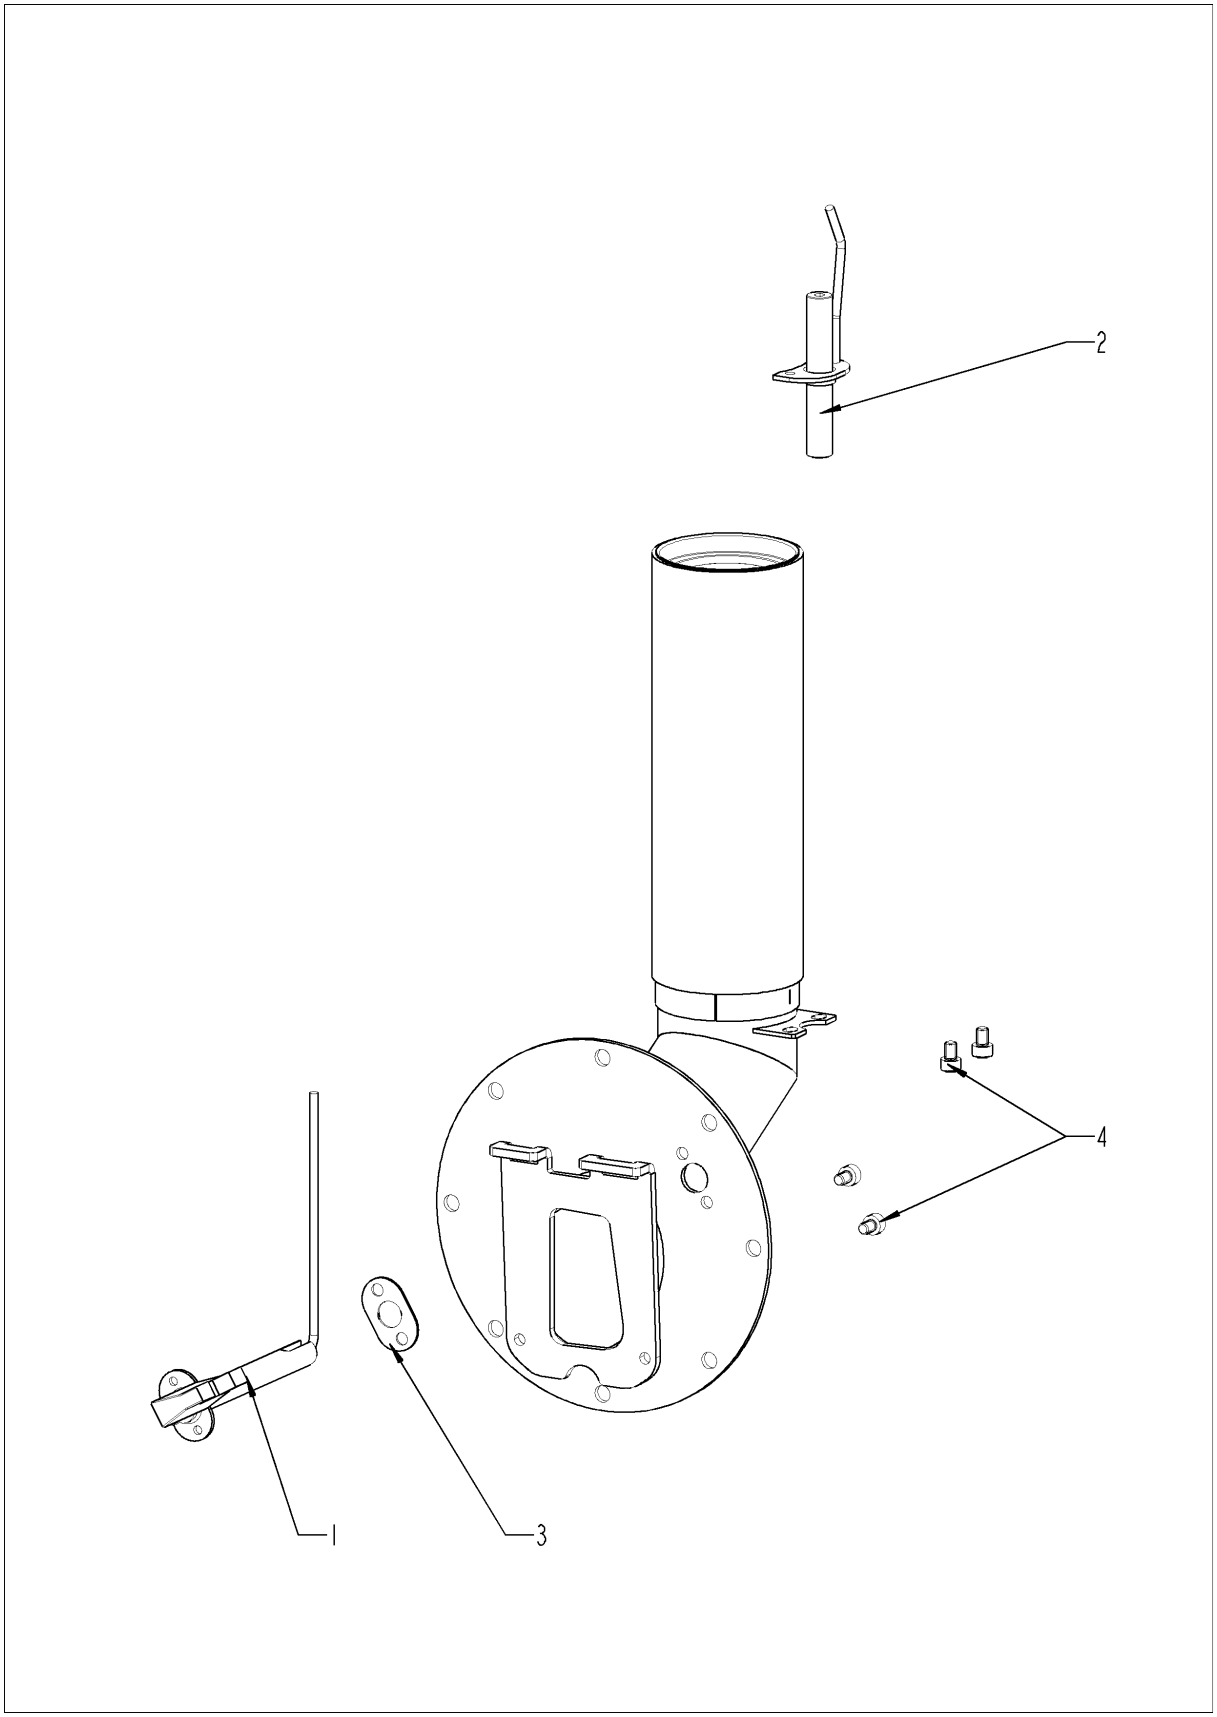

# Burner hot air

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 74.00.034 | Ignitionelectrode, hot air | 1 |
| 2 | 74.00.873 | Earth electrode, hot air | 1 |
| 3 | 74.00.290 | Gasket electrode hot air | 1 |
| 4 | 10.00.696 | Allen screw M4x6 w. Precoat 85 | 4 |


# Motor and fan wheel

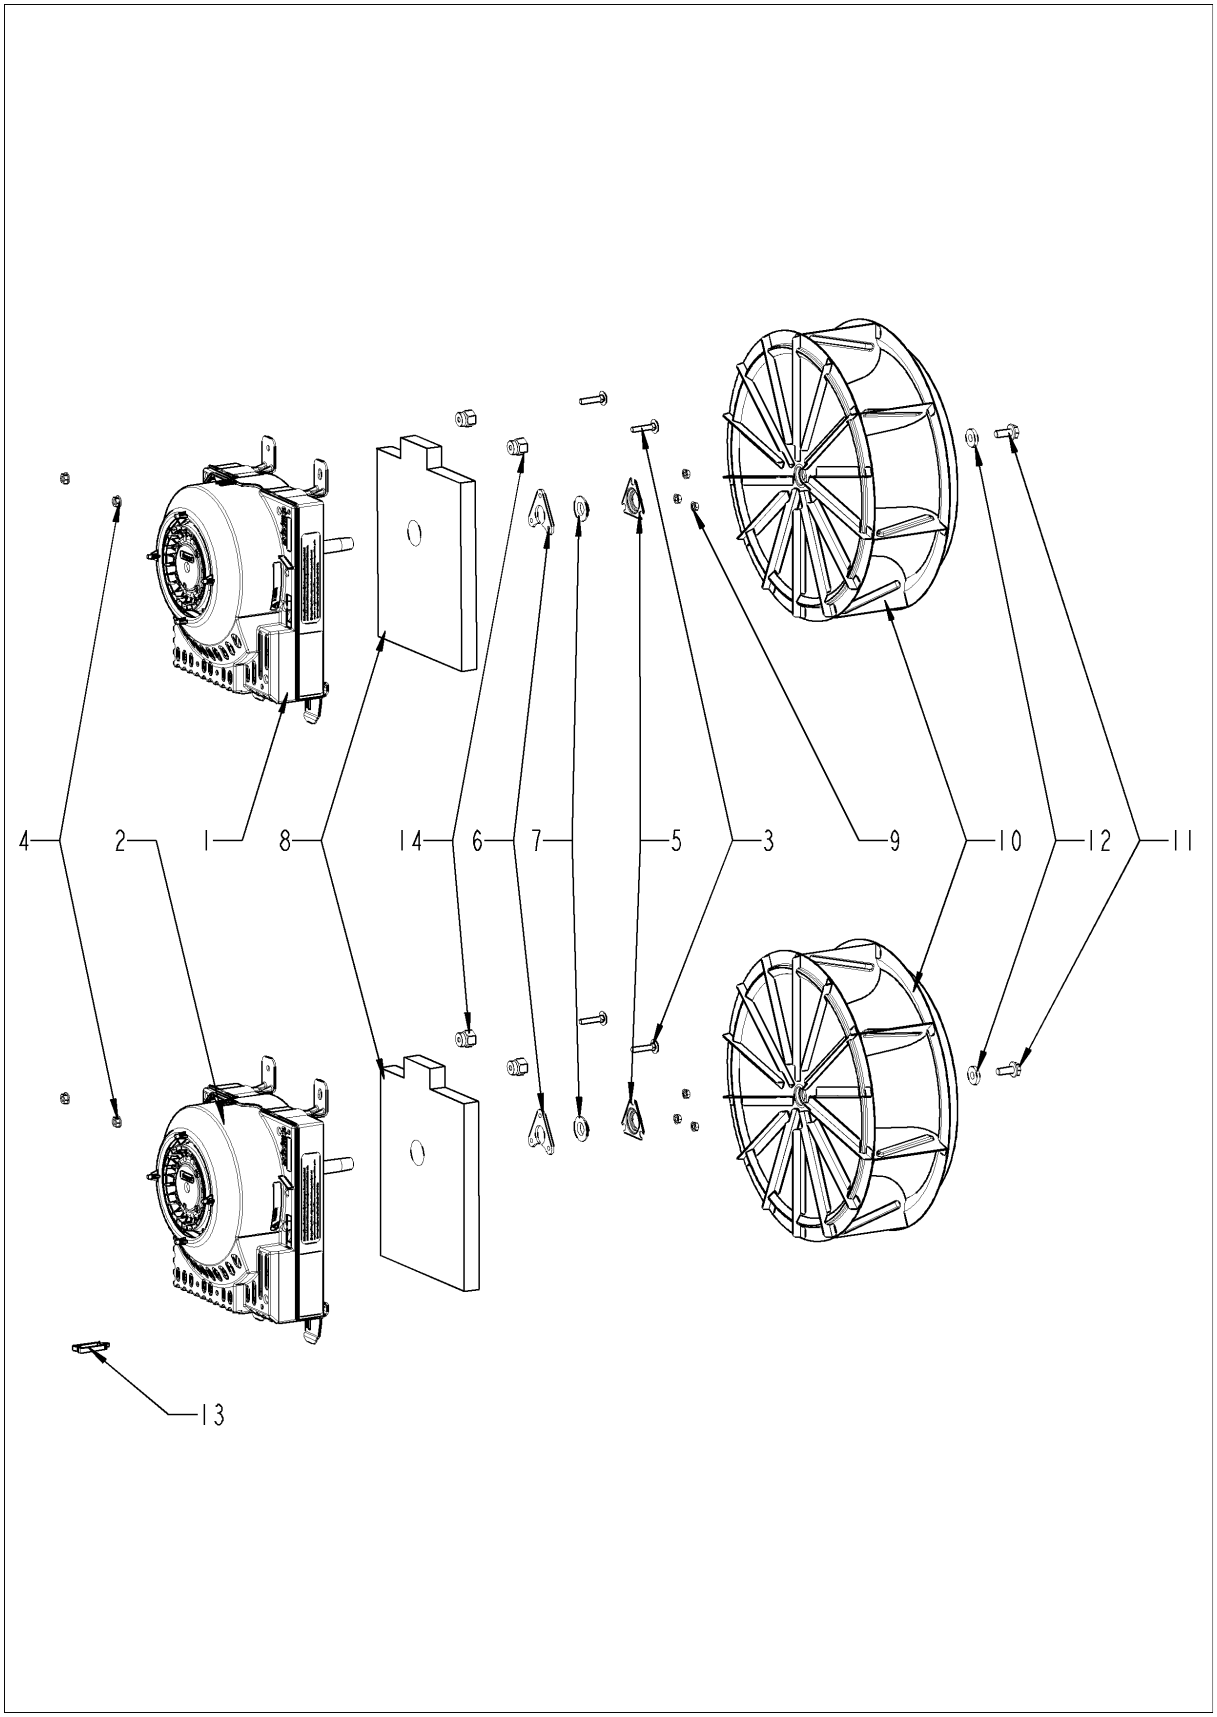

# Motor and fan wheel

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 40.03.513 | Fan motor | 1 |
| 2 | 40.03.513 | Fan motor | 1 |
| 3 | 10.01.049 | Square necked mushroom head bolt 6x30 | 8 |
| 4 | 10.00.709 | Hex nut M6 w. locking | 4 |
| 5 | 22.00.721 | Flange f. motor shaft gasket | 2 |
| 6 | 22.00.722 | Mounting support f. gasket flange | 2 |
| 7 | 22.00.083 | Motor shaft gasket | 2 |
| 8 | 20.01.755 | Isolation for mounting plate for motor | 2 |
| 9 | 10.01.065 | Hex nut M5 | 6 |
| 10 | 22.00.829 | Fan wheel | 2 |
| 11 | 10.00.565 | Hex screw M8x20 | 2 |
| 12 | 1308.0162 | Washer A8,4 | 2 |
| 13 | 10.00.112 | Cable clip short | 1 |
| 14 | 20.01.411 | Bushing for motor mounting bar | 8 |


# Interior cabinet

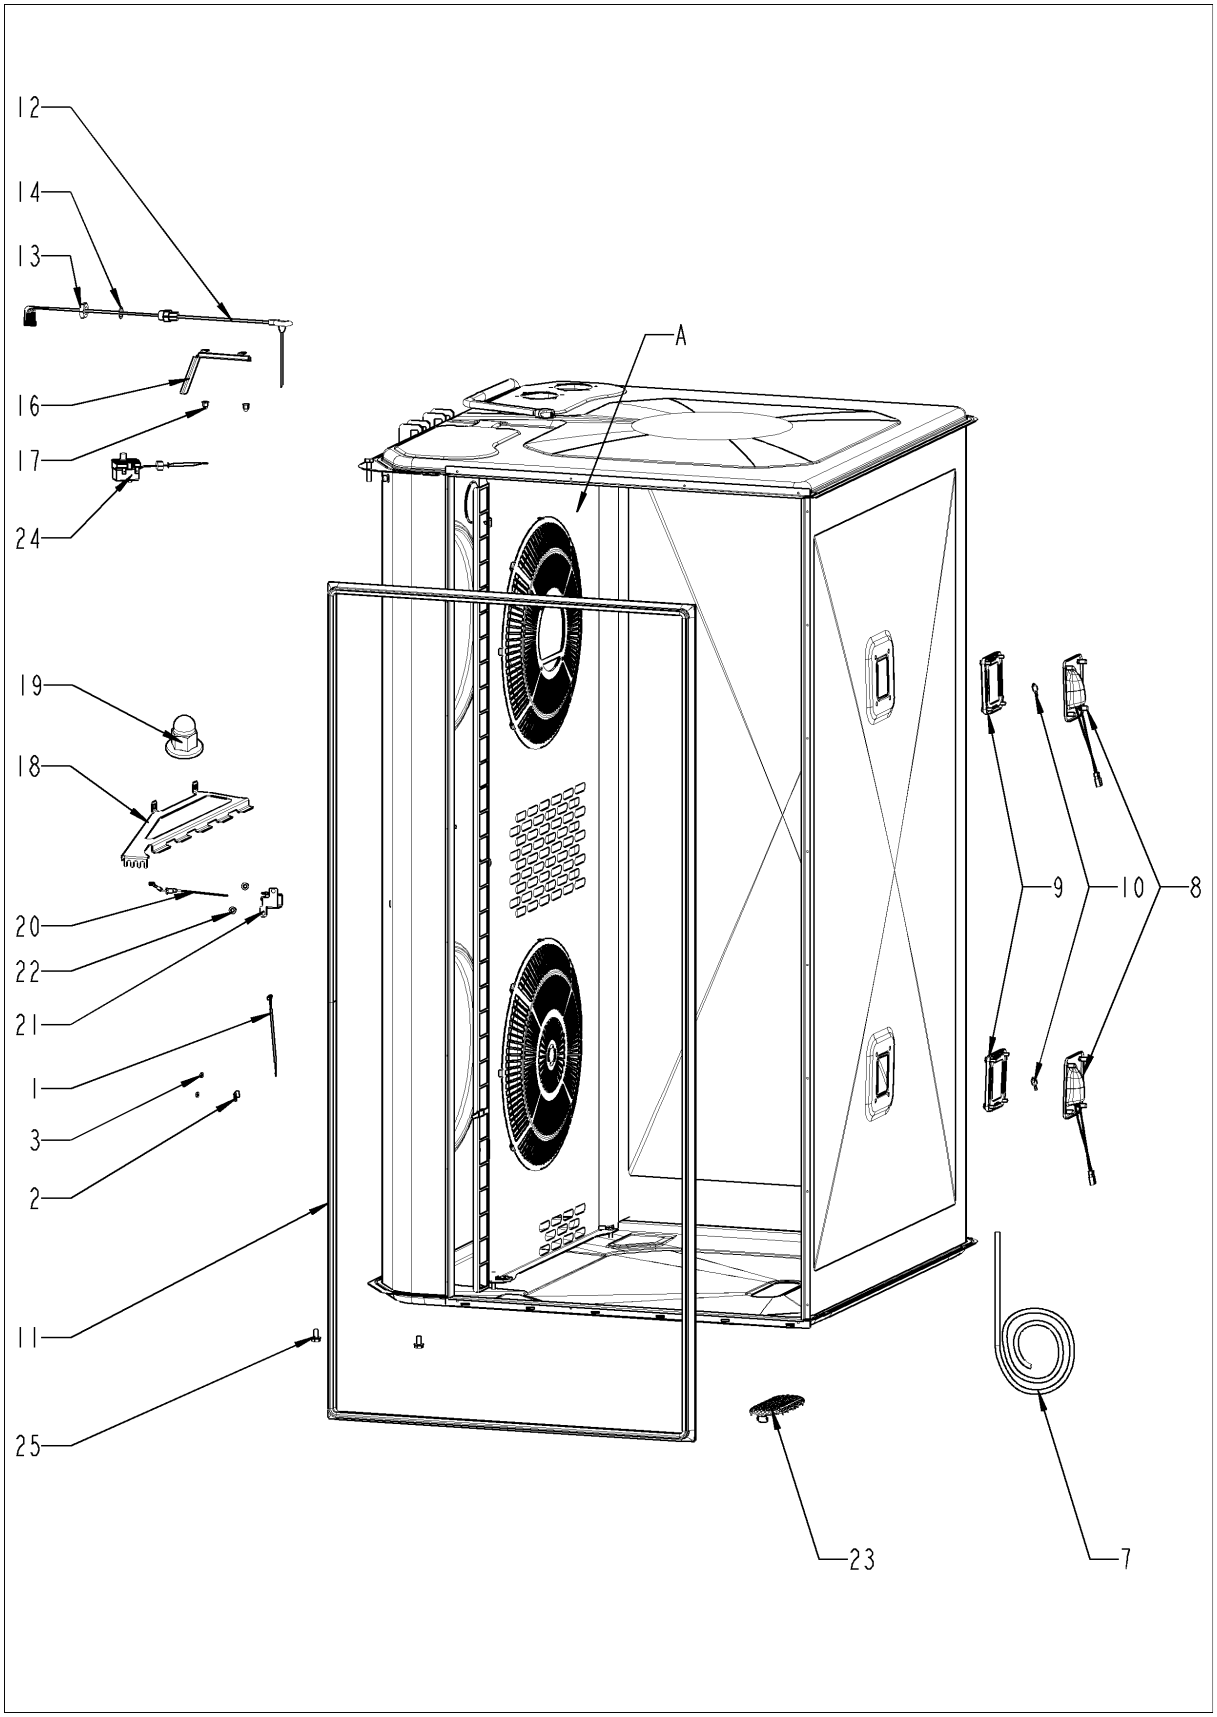

# Interior cabinet

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 40.00.399 | Thermocouple humidity | 1 |
| 2 | 10.00.087 | Clamp strap f. sensor | 1 |
| 3 | 10.00.100 | Hex nut M4, self-locking | 1 |
| 7 | 40.03.532 | Wiring interior light | 1 |
| 8 | 40.00.098 | Reflector f. interior light | 2 |
| 9 | 40.00.091 | Gasket frame w. glass a. gaskets | 2 |
| 10 | 3024.0201 | Halogen bulb 300°C | 1 |
| 10 | 3024.0201 | Halogen bulb 300°C | 1 |
| 11 | 20.00.399 | Door gasket | 1 |
| 12 | 40.02.101 | Meat probe sensor | 1 |
| 13 | 10.00.612 | Hex nut M16 flat | 1 |
| 14 | 1315.0104 | Copper washer 16x20x1,5 | 1 |
| 16 | 40.01.317 | Screen core temperature sensor | 1 |
| 17 | 10.01.076 | Cap nut M5*A2 | 2 |
| 18 | 22.00.781 | Air baffle support | 1 |
| 19 | 10.01.076 | Cap nut M5*A2 | 4 |
| 20 | 40.03.528 | Thermocouple interior cabinet B1 | 1 |
| 21 | 40.03.782 | Screen interior cabinet sensor | 1 |
| 22 | 10.01.076 | Cap nut M5*A2 | 2 |
| 23 | 54.01.117 | Outlet sieve | 1 |
| 24 | 40.01.482 | Safety temperature limiter 365°C | 1 |
| 25 | 3014.0327 | Hex nut M10x1,0 | 1 |
| A | 22.00.751 | Air baffle | 1 |


# Air baffle

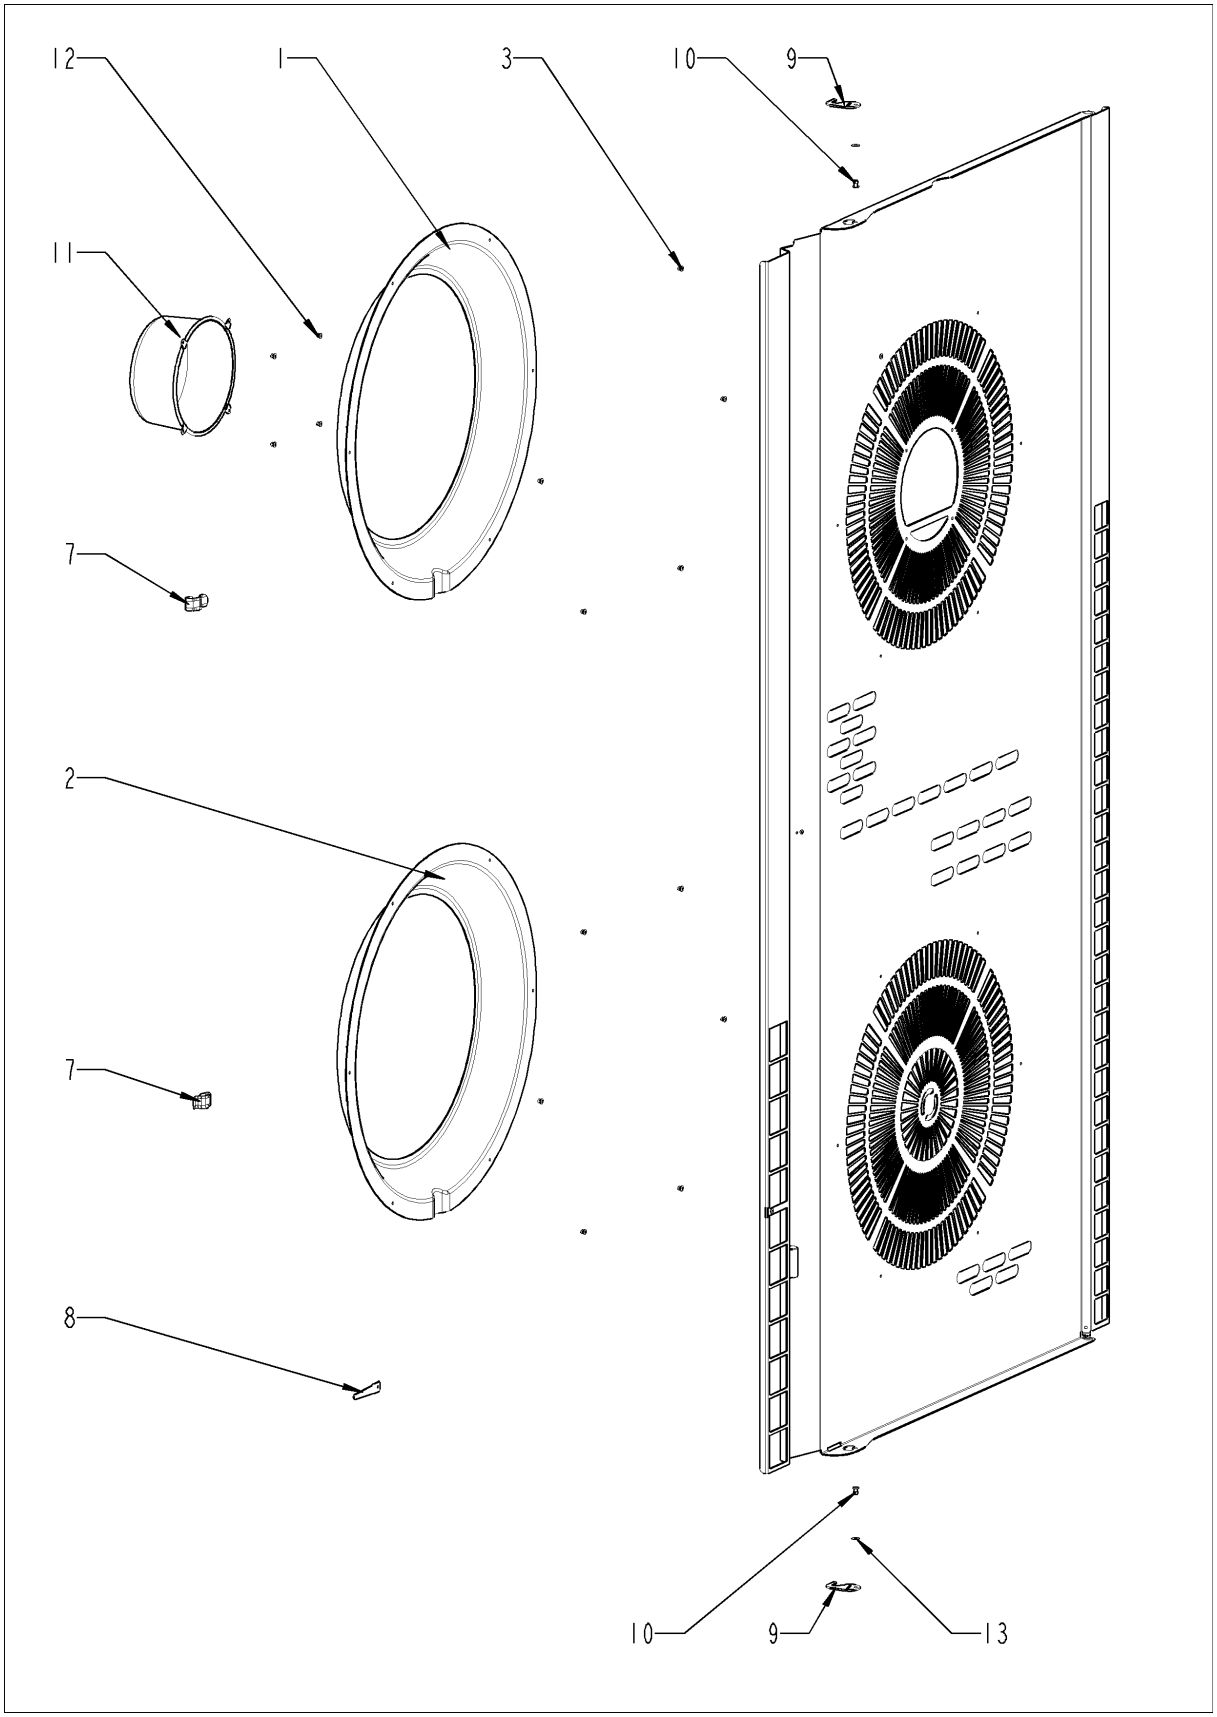

# Air baffle

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 22.00.836 | Air sucking ring f. air baffle | 1 |
| 2 | 22.00.836 | Air sucking ring f. air baffle | 1 |
| 3 | 10.00.515 | Rivet 3,2x5 A4 | 12 |
| 7 | 40.03.780 | Fixing clip core temp. cable | 3 |
| 8 | 22.00.491 | Surge guard for Meat probe sensor | 1 |
| 9 | 2760.1370 | Latch hook for air baffle | 2 |
| 10 | 1604.0167 | Rivet 4x10 | 3 |
| 11 | 22.00.361 | Deep-draw f. air baffle | 1 |
| 12 | 10.00.515 | Rivet 3,2x5 A4 | 4 |
| 13 | 10.00.744 | Washer A4,3 *A4 | 1 |


# Door

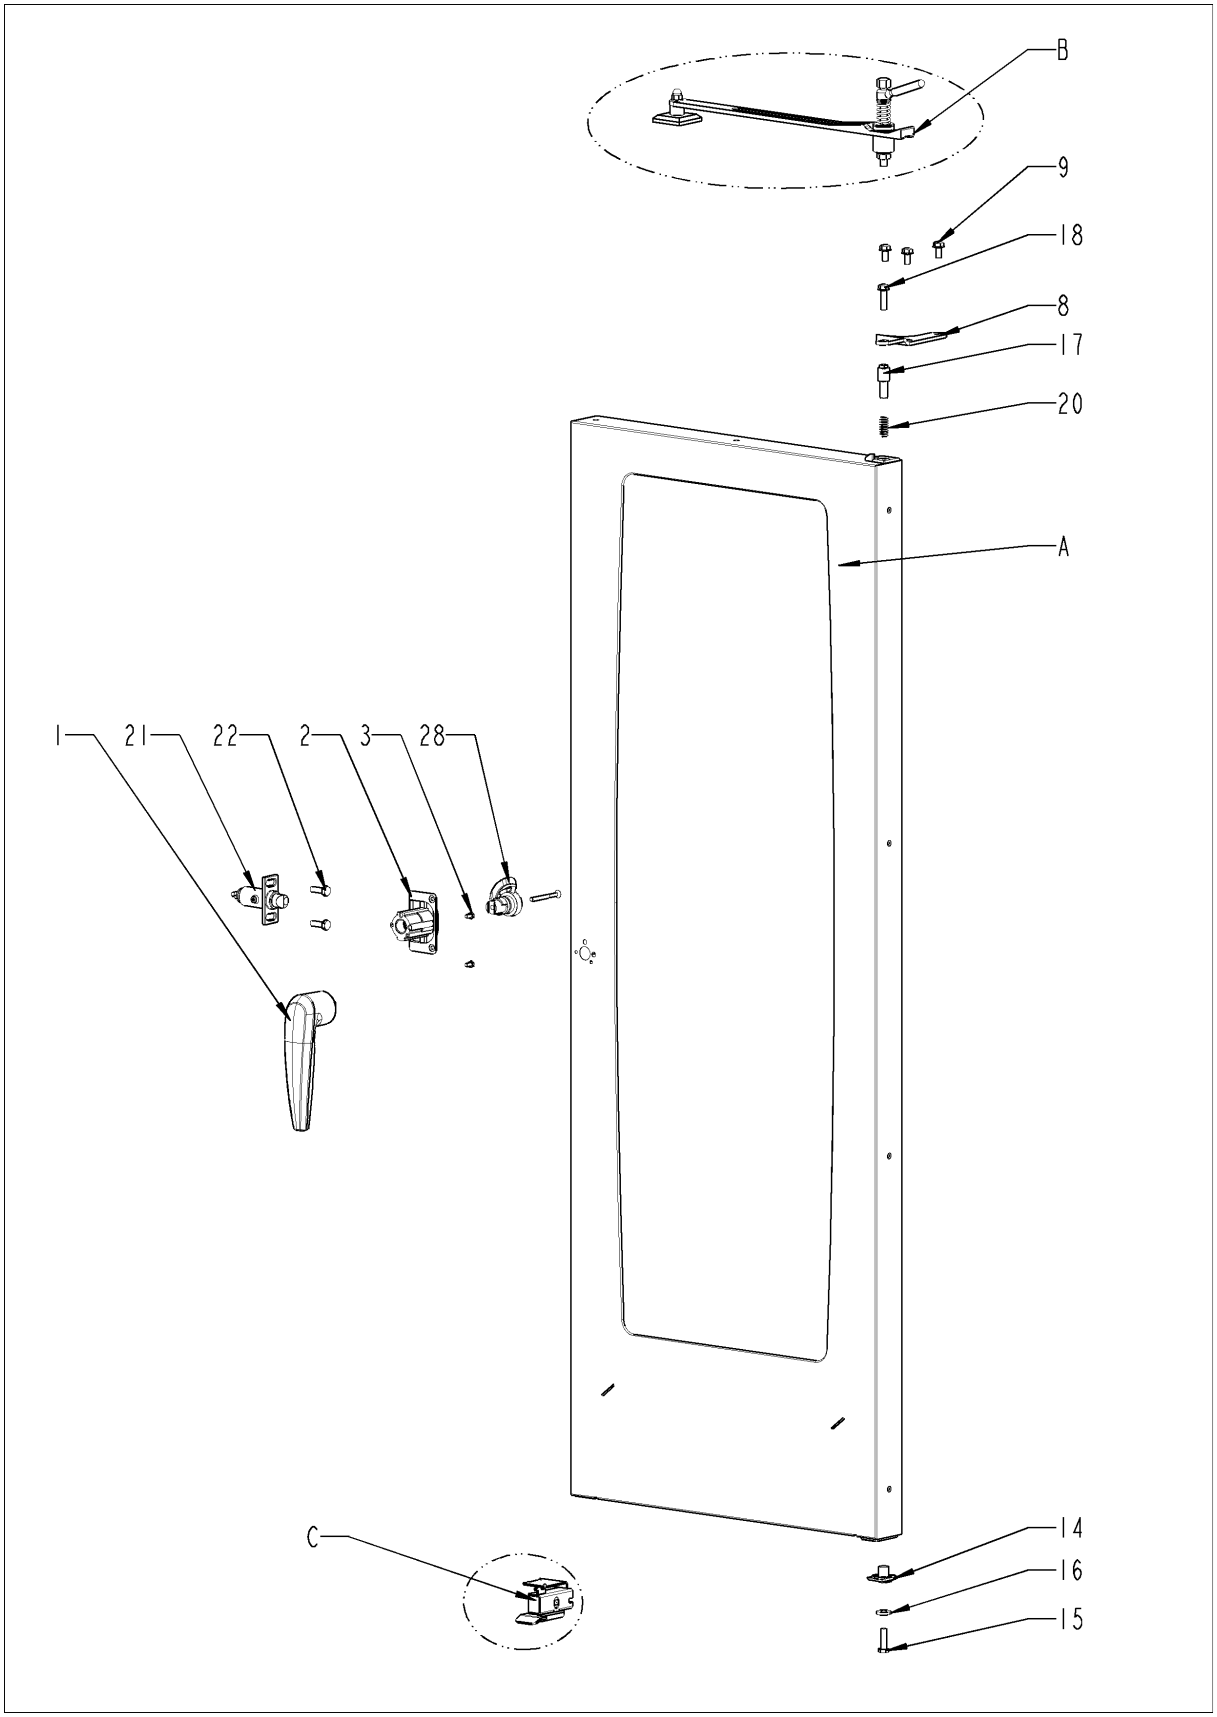

# Door

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 24.00.136 | Door handle | 1 |
| 2 | 24.01.350 | Door lock | 1 |
| 3 | 10.00.697 | Hex screw M5x10 w. precoat 85 | 2 |
| 4 | 1305.0160 | Washer A5,3x10mm | 2 |
| 5 | 10.00.090 | Cap f. Torx T30 | 1 |
| 7 | 10.00.696 | Allen screw M4x6 w. Precoat 85 | 2 |
| 8 | 24.00.133 | Door mounting support top | 1 |
| 9 | 1008.0768 | Ornamental screw M8x16 | 3 |
| 14 | 24.00.145 | Door bolt | 1 |
| 15 | 1008.0766 | Hex screw M8x30 | 1 |
| 16 | 1308.0162 | Washer A8,4 | 1 |
| 17 | 24.00.048 | Door bolt | 1 |
| 18 | 1008.0769 | Ornamental screw M8x30 | 1 |
| 20 | 2001.0109 | Compression spring | 1 |
| 21 | 24.01.351 | Door catch | 1 |
| 22 | 1008.0761 | Hex screw M8x25 | 2 |
| 28 | 87.00.540 | Door bolt cpl. | 1 |
| A | 24.00.126 | Door | 1 |


# Door

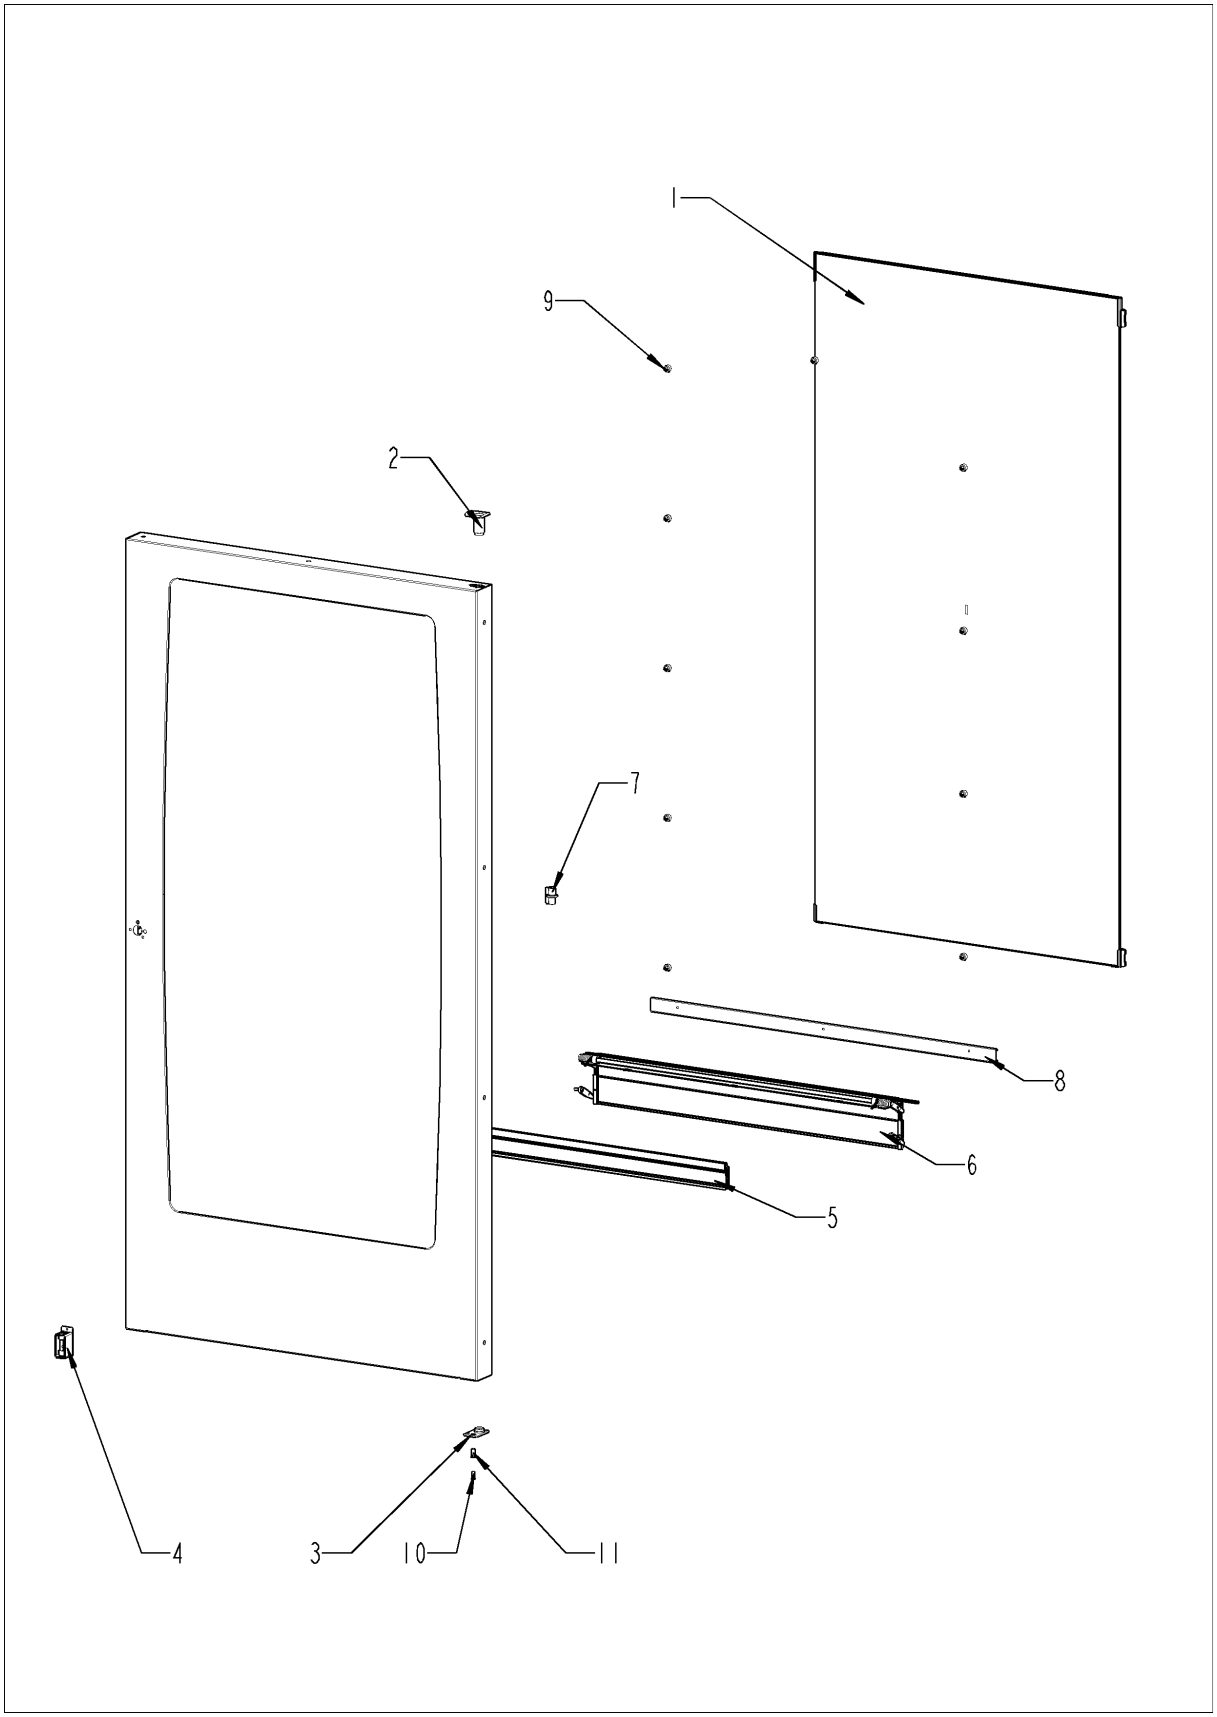

# Door

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 24.00.212 | Inner glass pane | 1 |
| 2 | 24.00.147 | Sleeve for door bolt top | 1 |
| 3 | 24.00.159 | Door setting bolt | 1 |
| 4 | 24.01.346 | Fixing device f. magnet with magnet, adjustable | 1 |
| 5 | 24.00.194 | Gasket glass pane/trolly | 1 |
| 6 | 24.00.178 | Pre heat mechanism f. door cpl. | 1 |
| 7 | 24.00.507 | Fixing device middle f.inter. glass pane | 1 |
| 8 | 24.00.701 | Additional gasket f. trolly | 1 |
| 9 | 24.01.259 | Plastic buffer 8,1mm for door | 1 |
| 10 | 1005.1966 | Countersunk screw Torx M5x16 | 2 |
| 11 | 10.00.041 | Rivet nut M5 hexagon closed | 2 |


# Exterior cabinet

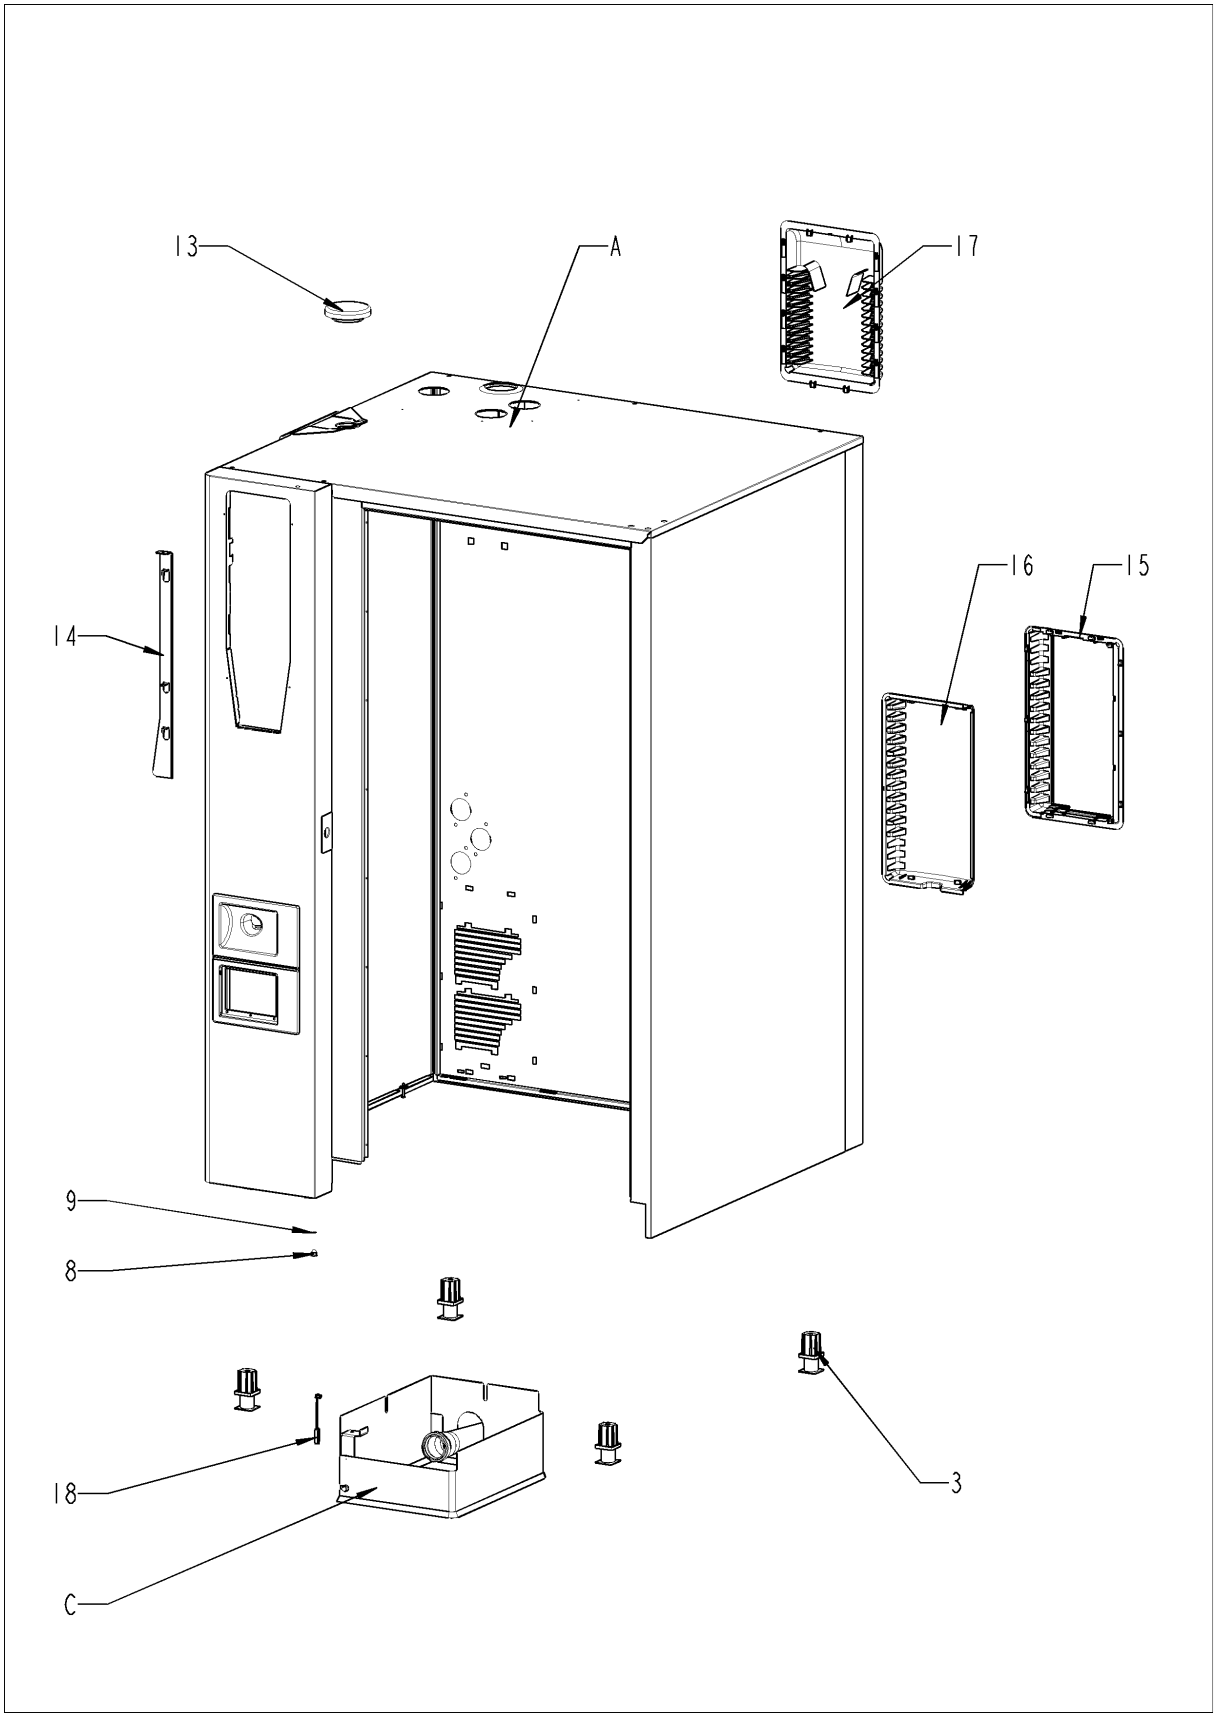

# Exterior cabinet

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 3 | 2039.0111 | Foot adjustable, metal, 40 x 40 | 4 |
| 8 | 10.00.745 | Cap nut M6*A2 | 1 |
| 9 | 1206.0120 | Tooth lock washer A6,4 | 1 |
| 13 | 22.00.767 | Vent cover | 1 |
| 14 | 16.01.965 | Opening mechanism for panel insert | 1 |
| 15 | 40.03.385 | Frame for air inlet filter | 1 |
| 16 | 40.03.392 | Cover for air inlet filter | 1 |
| 17 | 40.03.366 | Cover air outlet | 1 |
| 18 | 40.00.454 | Door switch 1.65m | 1 |
| A | | Exterior cabinet | 1 |
| C | 12.01.142 | NSF housing floor units 201-202 | 1 |


# Exterior cabinet

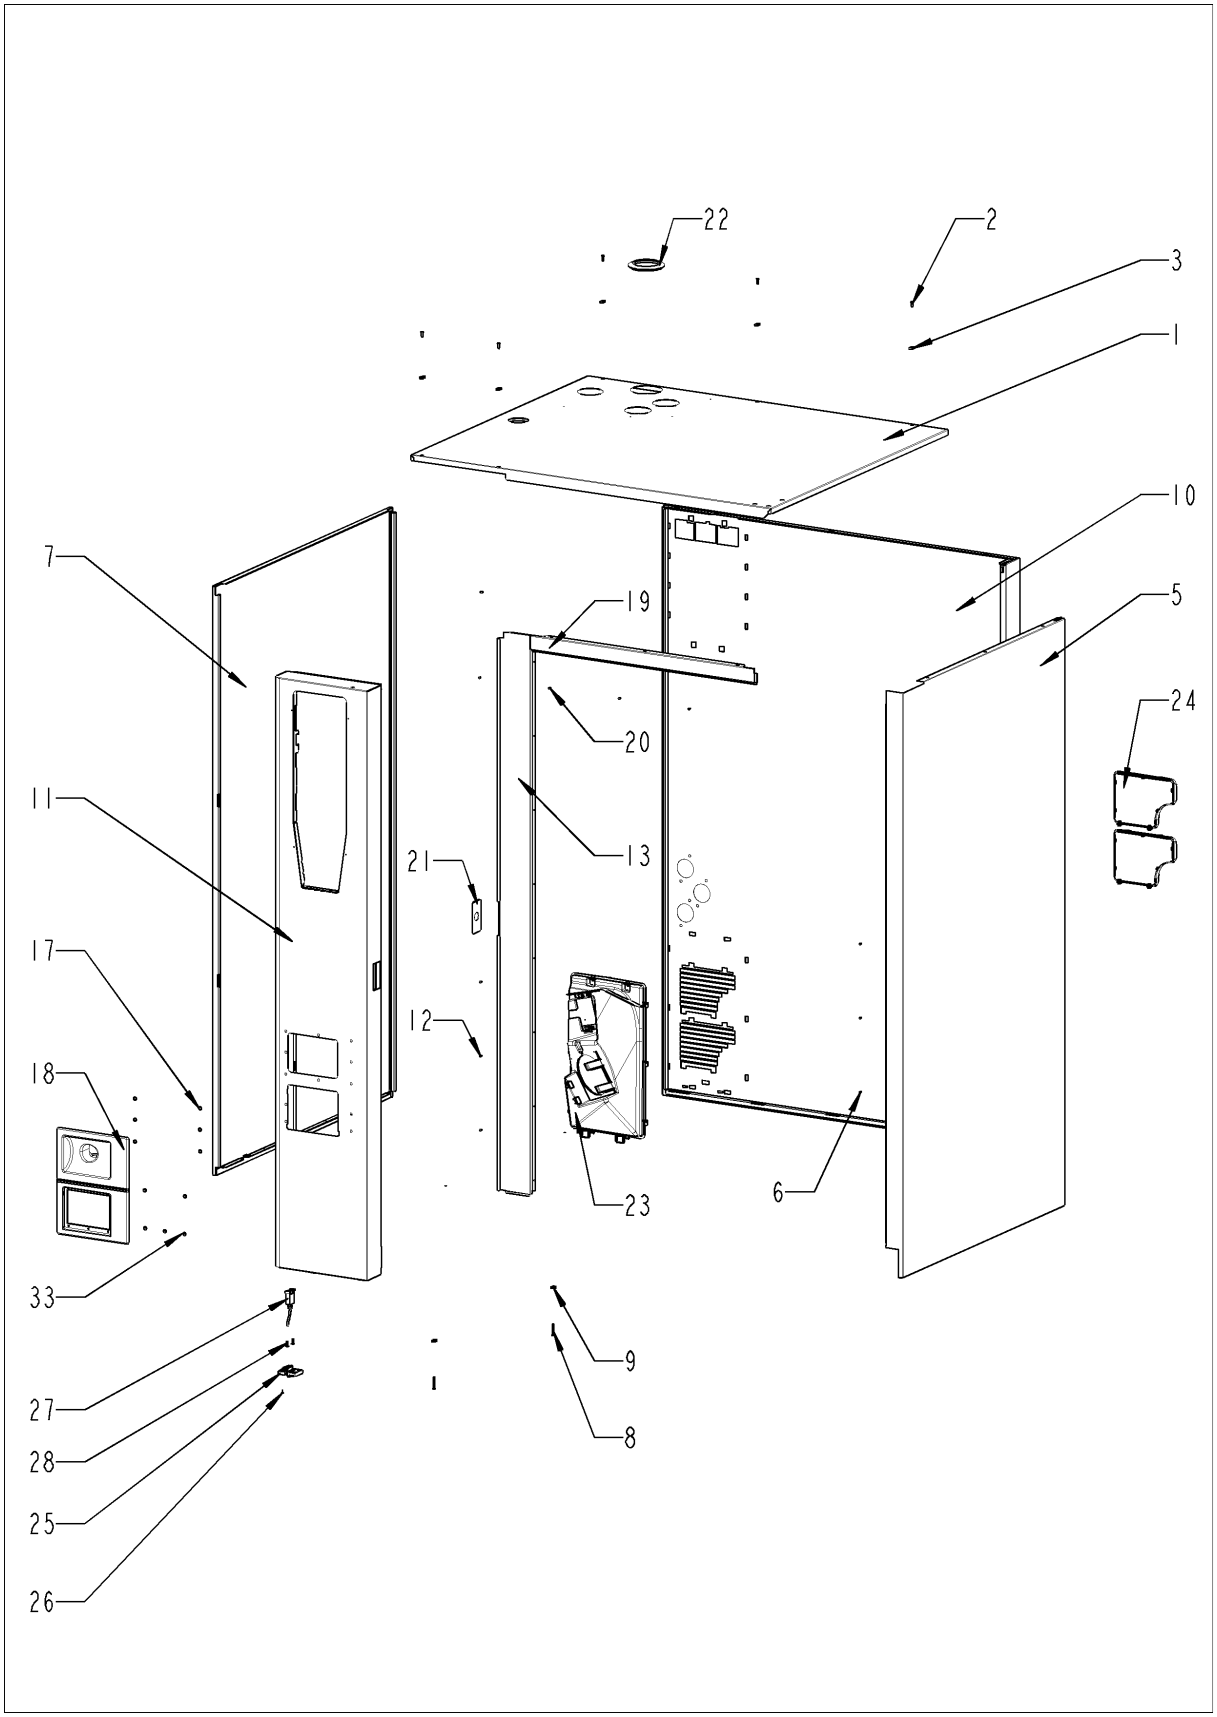

# Exterior cabinet

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 16.02.169 | Top cover | 1 |
| 2 | 1003.2265 | Countersunk self tapping screw 4,2x16 | 5 |
| 3 | 1104.0820 | Snap nut 4,2mm | 5 |
| 4 | 1004.2160 | Hex self tapping screw 4,2x16 | 4 |
| 5 | 16.00.158 | Side panel right | 1 |
| 6 | 1603.0166 | Rivet 3,2x7,9 CNS closed | 8 |
| 7 | 16.00.139 | Side panel left | 1 |
| 8 | 10.00.992 | Hex self tapping screw B4,2x32 | 2 |
| 9 | 1104.0820 | Snap nut 4,2mm | 2 |
| 10 | 16.01.844 | Back panel | 1 |
| 11 | 16.01.863 | Front panel | 1 |
| 12 | 1603.0166 | Rivet 3,2x7,9 CNS closed | 8 |
| 13 | 16.00.358 | Crossbar front panel | 1 |
| 14 | 10.00.745 | Cap nut M6*A2 | 2 |
| 18 | 16.01.942 | Tulip for handshower | 1 |
| 19 | 16.00.331 | Crossbar top | 1 |
| 20 | 1603.0166 | Rivet 3,2x7,9 CNS closed | 4 |
| 21 | 24.02.263 | Cover for door latch | 1 |
| 22 | 16.01.579 | Gasket f. breather tube d=79mm | 1 |
| 23 | 40.03.262 | Fan housing | 1 |
| 24 | 40.02.684 | Air inlet filter cpl. | 2 |
| 25 | 16.00.329 | Cover f. USB interface | 1 |
| 26 | 10.00.103 | EJOT PT-screw KA 3.5x10 | 1 |
| 27 | 40.04.047 | Interface cable USB 1.6m | 1 |
| 28 | 10.00.460 | EJOT PT-Screw Torx 3,5x14 | 2 |
| 33 | 1107.0100 | Star lock ø4 | 12 |


# NSF housing floor units 201-202

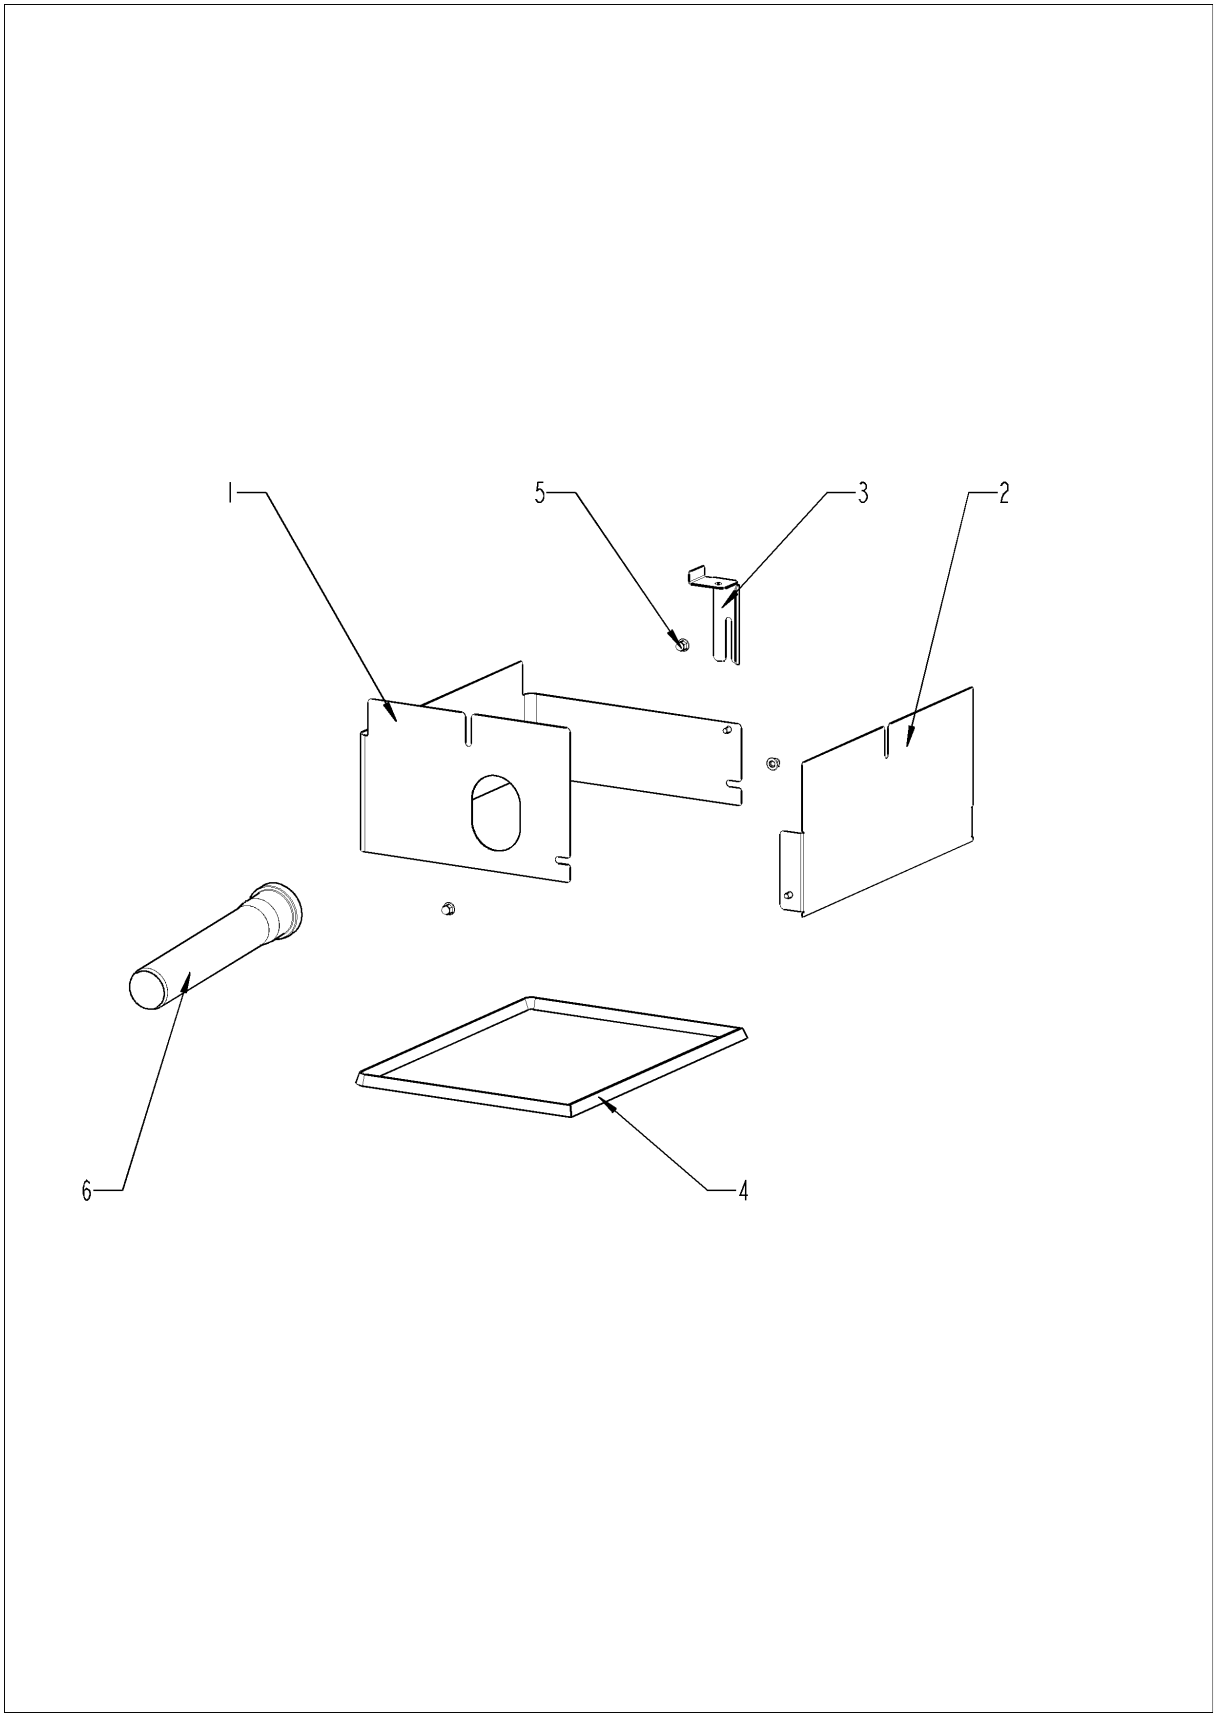

# NSF housing floor units 201-202

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 12.01.153 | NSF housing right floor units 201-202 | 1 |
| 2 | 12.01.154 | NSF housing left floor units 201-202 | 1 |
| 3 | 12.01.151 | Fixing angle NSF housing floor units 201-202 | 1 |
| 4 | 12.01.140 | Gasket NSF housing floor units 201-202 | 1 |
| 5 | 10.00.745 | Cap nut M6*A2 | 3 |
| 6 | 2070.0054 | HT pipe, DN 50, 250 mm | 1 |


# Water

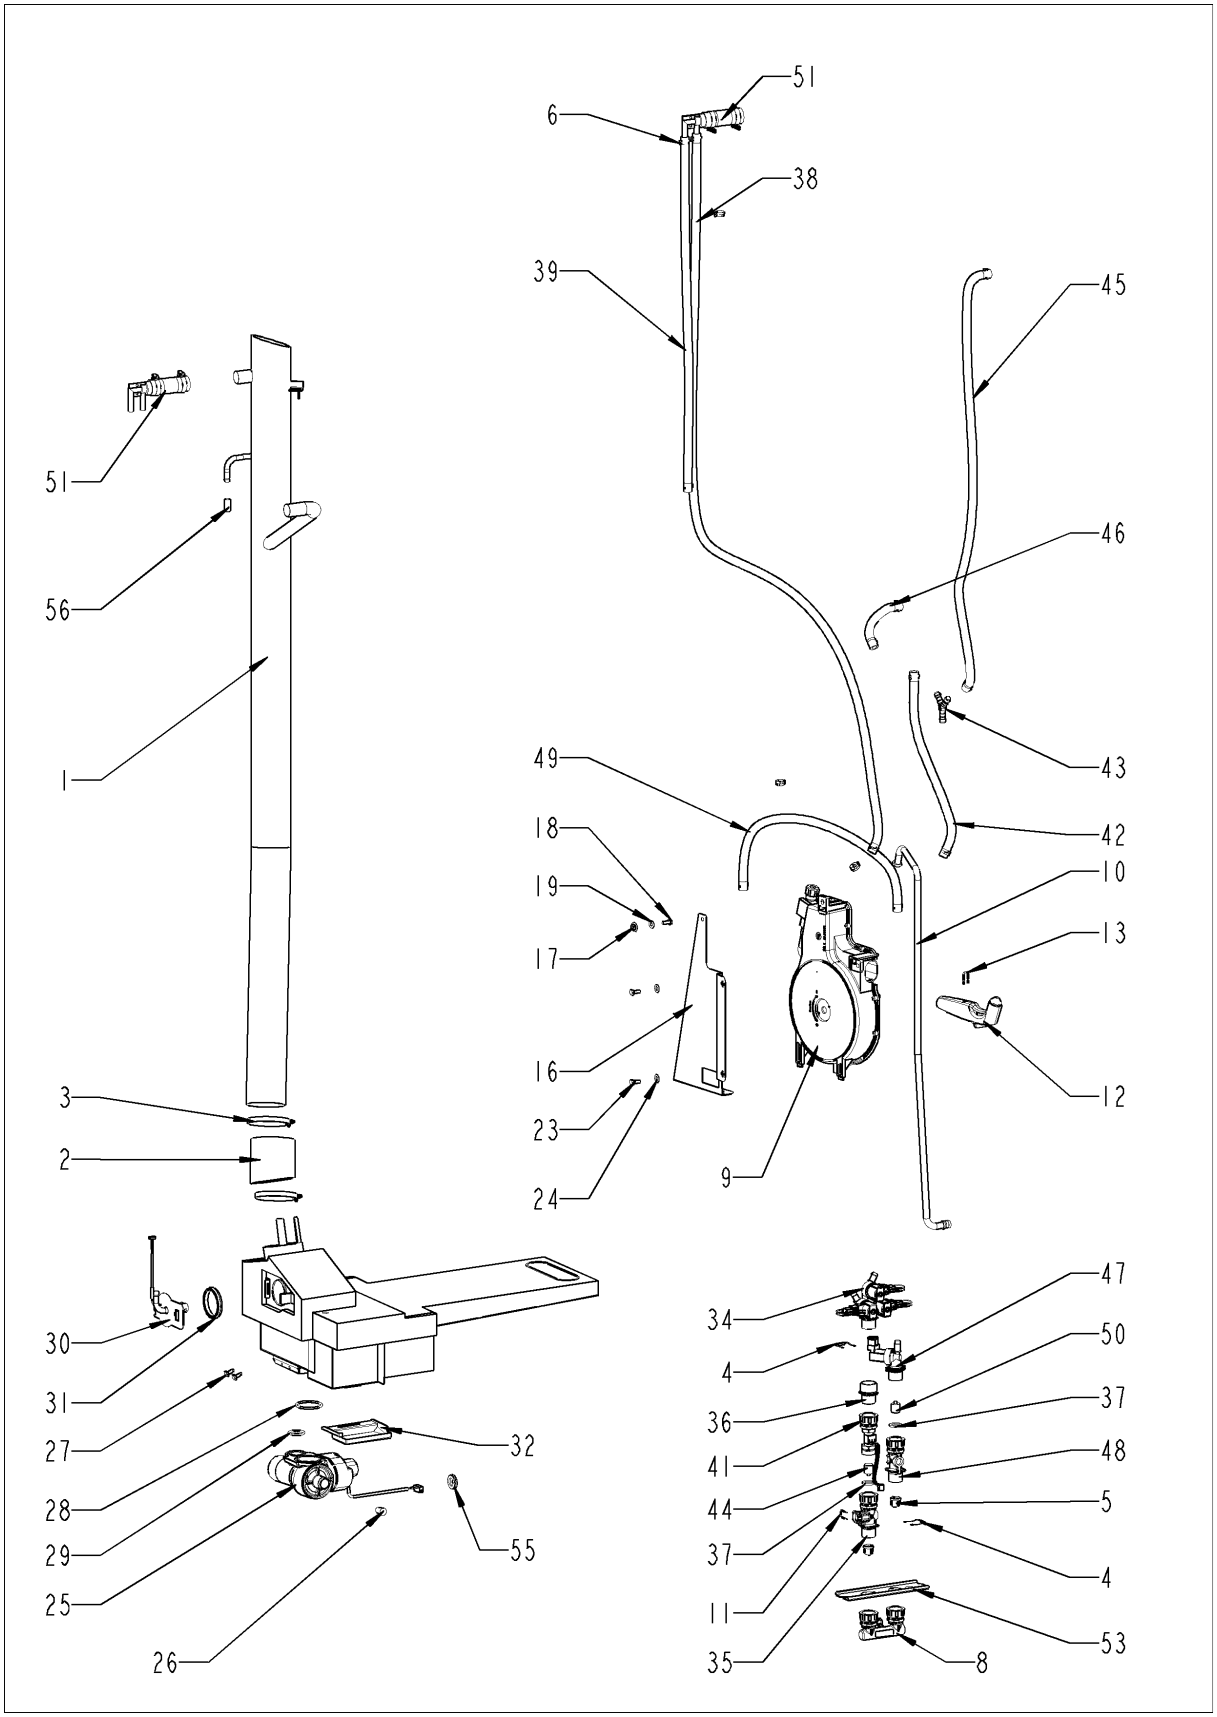
51
6
38
39
45
46
43
42
10
13
12
49
18
19
17
16
23
24
9
3
2
1
56
51
30
31
27
28
29
25
26
32
55
34
4
36
41
44
37
11
35
47
50
37
48
5
4
53
8

# Water

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 54.00.984 | Ventilation pipe | 1 |
| 2 | 54.01.045 | Hose 76x5mm | 1 |
| 3 | 2066.0505 | Hose clamp 70-90mm | 2 |
| 6 | 2066.0205 | Hose clamp 8-16x9 mm SW 7mm | 3 |
| 8 | 8664.1301 | T-fitting water connection | 1 |
| 9 | 50.01.239 | Hand shower roll guide *lead free* | 1 |
| 10 | 50.01.213 | Connect. pipe f. hand shower roll guide | 1 |
| 10 | 50.01.373 | Connect. pipe f. hand shower roll guide | 1 |
| 11 | 50.00.085 | Plug-in spring f. hand shower roll guide | 1 |
| 12 | 50.00.130 | Hand shower | 1 |
| 13 | 50.00.156 | Clamp f. hand shower roll guide | 1 |
| 16 | 50.00.278 | Mounting device f. hand sh. roll guide | 1 |
| 17 | 1106.0803 | Hex combination nut M6 galv | 1 |
| 18 | 1006.0760 | Hex screw M6x16 | 1 |
| 19 | 1306.0222 | Washer A6,4x15x1,5 | 1 |
| 20 | 50.00.548 | Hose ø10x2x500 f. hand shower | 1 |
| 21 | 2066.0527 | Hose clamp ø14mm | 1 |
| 22 | 10.00.661 | Edge protection profile | 1 |
| 23 | 10.00.099 | Hex screw M8x12 | 2 |
| 24 | 1308.0160 | Washer A8,4 | 2 |
| 25 | 54.01.291 | Ball valve drain SCC cpl. | 1 |
| 26 | 10.00.369 | Plug cone shaped | 1 |
| 27 | 10.00.449 | Pan head screw M6x16 | 2 |
| 28 | 10.00.511 | O-ring for ball valve drain 46x3.5 | 1 |
| 29 | 10.00.512 | O-ring for ball valve drain 26x3.5 | 1 |
| 30 | 54.01.254 | Inspection lid, quenching nozzle, B2 | 1 |
| 31 | 54.01.168 | Gasket f. inspection lid quenching | 1 |
| 32 | 54.01.191 | Collecting pan | 1 |
| 33 | 10.00.745 | Cap nut M6*A2 | 1 |
| 34 | 50.01.050 | Triple solenoid valve | 1 |
| 35 | 50.00.072 | Water distribution vert roll guide con. | 1 |
| 36 | 2062.0333 | Housing for non returne valve | 1 |
| 37 | 5110.1024 | Gasket for G3/4" threaded joint | 1 |
| 38 | 2067.0050 | Pressure hose d10mm | 1.93 |
| 39 | 2067.0050 | Pressure hose d10mm | .84 |
| 41 | 50.01.195 | Water volume sensor with wire | 1 |


# Water

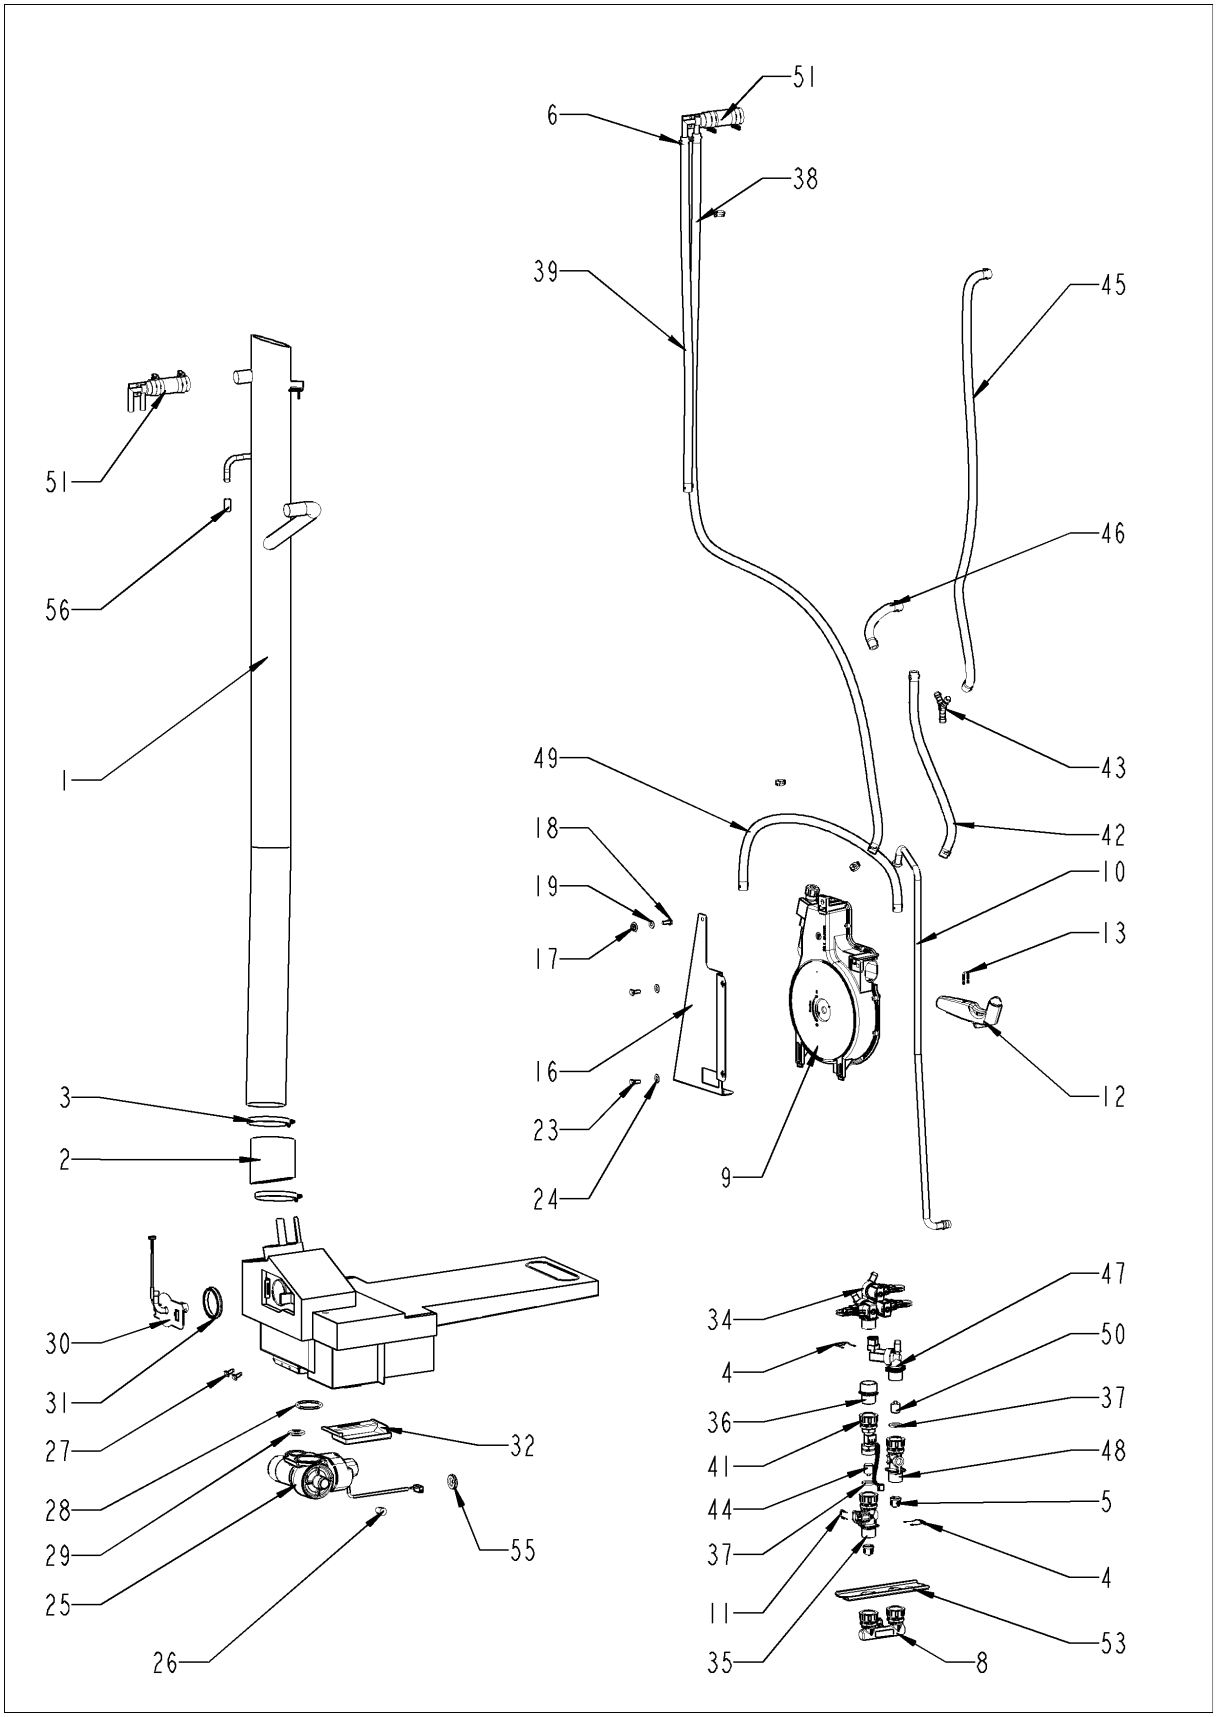
51
6
38
39
45
51
46
56
1
49
43
18
42
19
10
17
13
16
12
3
23
2
24
9
30
47
34
50
4
31
37
36
27
48
41
32
28
5
44
29
4
37
55
25
11
53
26
35
8

# Water

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 42 | 2067.0050 | Pressure hose d10mm | .56 |
| 43 | 2062.0303 | Y-fitting YS10 | 1 |
| 44 | 2069.0107 | Non return valve DN6 steam generator | 1 |
| 45 | 2067.0050 | Pressure hose d10mm | .78 |
| 46 | 2067.0050 | Pressure hose d10mm | .31 |
| 47 | 50.01.146 | Single solenoid valve | 1 |
| 48 | 50.00.073 | Water distribution vert w/o roll guide con. | 1 |
| 49 | 2067.0050 | Pressure hose d10mm | .85 |
| 50 | 50.00.078 | Non return valve DW16/DN12 | 2 |
| 51 | 8354.1304 | Venting valve for steam generator | 1 |
| 52 | 1900.0202 | Water filter | 3 |
| 53 | 50.01.543 | Mounting device f. water distribution | 1 |
| 54 | 50.00.086 | Locking plate f. water distribution | 2 |
| 55 | 2022.0101 | Grommet d8mm | 1 |
| 56 | 10.00.991 | Sealing cap | 1 |


# CleanJet + Care

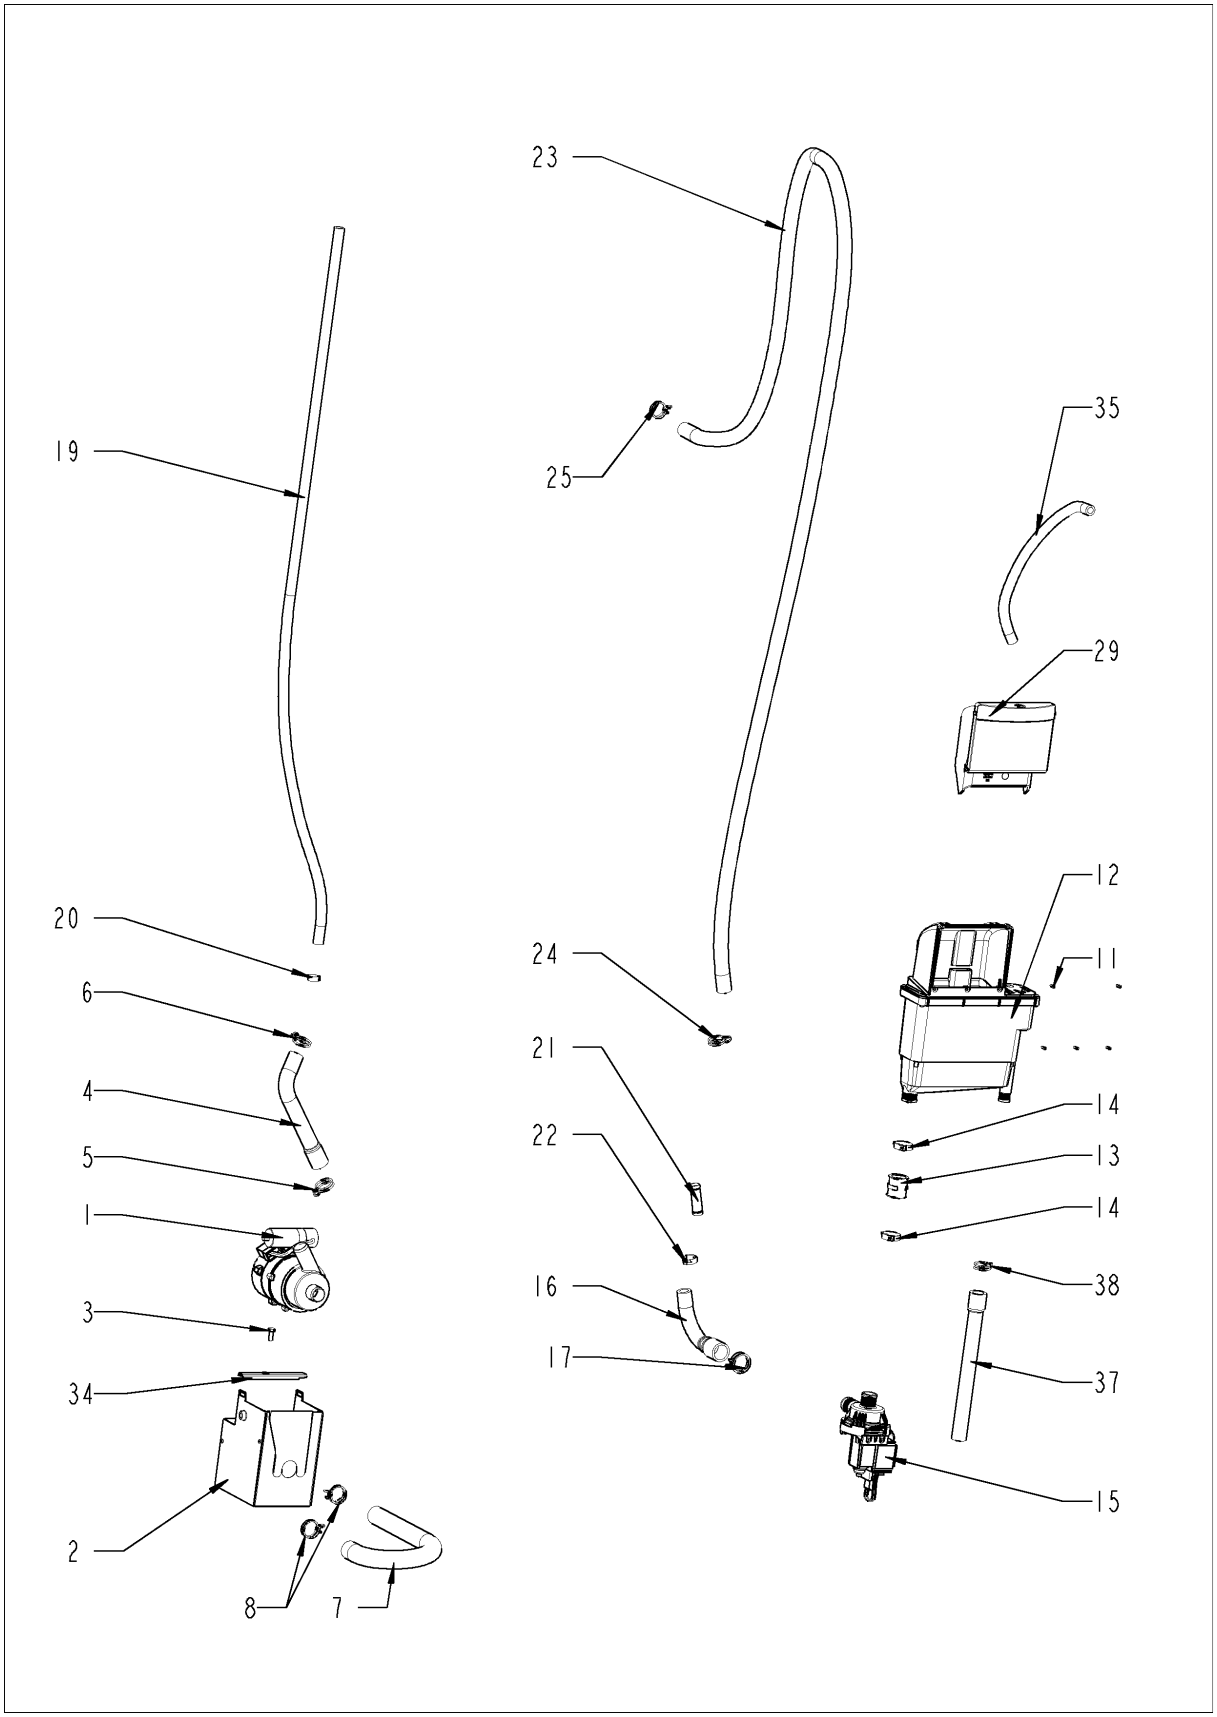

# CleanJet + Care

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 56.00.186 | Pump f. cleaning UP30 | 1 |
| 2 | 12.00.897 | Housing f. Cleaning pump | 1 |
| 3 | 1004.0666 | Hex screw M4x10 | 1 |
| 4 | 56.00.175 | Pressure hose f. cleaning | 1 |
| 5 | 2066.0518 | Hose clamp 30mm | 1 |
| 6 | 2066.0521 | Hose clamp 27mm | 1 |
| 7 | 56.00.176 | Suction hose f. cleaning | 1 |
| 8 | 2066.0518 | Hose clamp 30mm | 2 |
| 11 | 10.00.980 | EJOT PT-Screw K30x10 | 5 |
| 12 | 56.00.507 | Care container floor unit | 1 |
| 13 | 56.00.462 | Bushing care container/pump | 1 |
| 14 | 10.00.984 | Hose clamp CLIC d=27.5mm | 2 |
| 15 | 56.00.460 | Pump f. CareControl DPS 35 | 1 |
| 16 | 56.00.541 | Care hose 1 | 1 |
| 17 | 2066.0518 | Hose clamp 30mm | 1 |
| 21 | 56.00.537 | Pipe f. Care hose | 1 |
| 22 | 10.00.983 | Hose clamp CLIC d=23mm | 1 |
| 23 | 56.00.420 | Care hose 2 | 1 |
| 24 | 10.00.605 | Hose clamp ø25.3 | 1 |
| 25 | 10.00.979 | Cable clamp D=22 | 1 |
| 26 | 10.00.916 | Hex nut M4 w. locking | 1 |
| 27 | 1004.0666 | Hex screw M4x10 | 2 |
| 28 | 1204.0120 | Tooth lock washer A4,3 | 2 |
| 29 | 56.00.512 | Flap Care container | 1 |
| 34 | 12.00.291 | Mounting for housing of Cleaning pump | 1 |
| 35 | 2067.0050 | Pressure hose d10mm | 1.2 |
| 37 | 56.00.373 | Emergency overflow-tube | 1 |
| 38 | 10.00.605 | Hose clamp ø25.3 | 1 |


# Gas parts

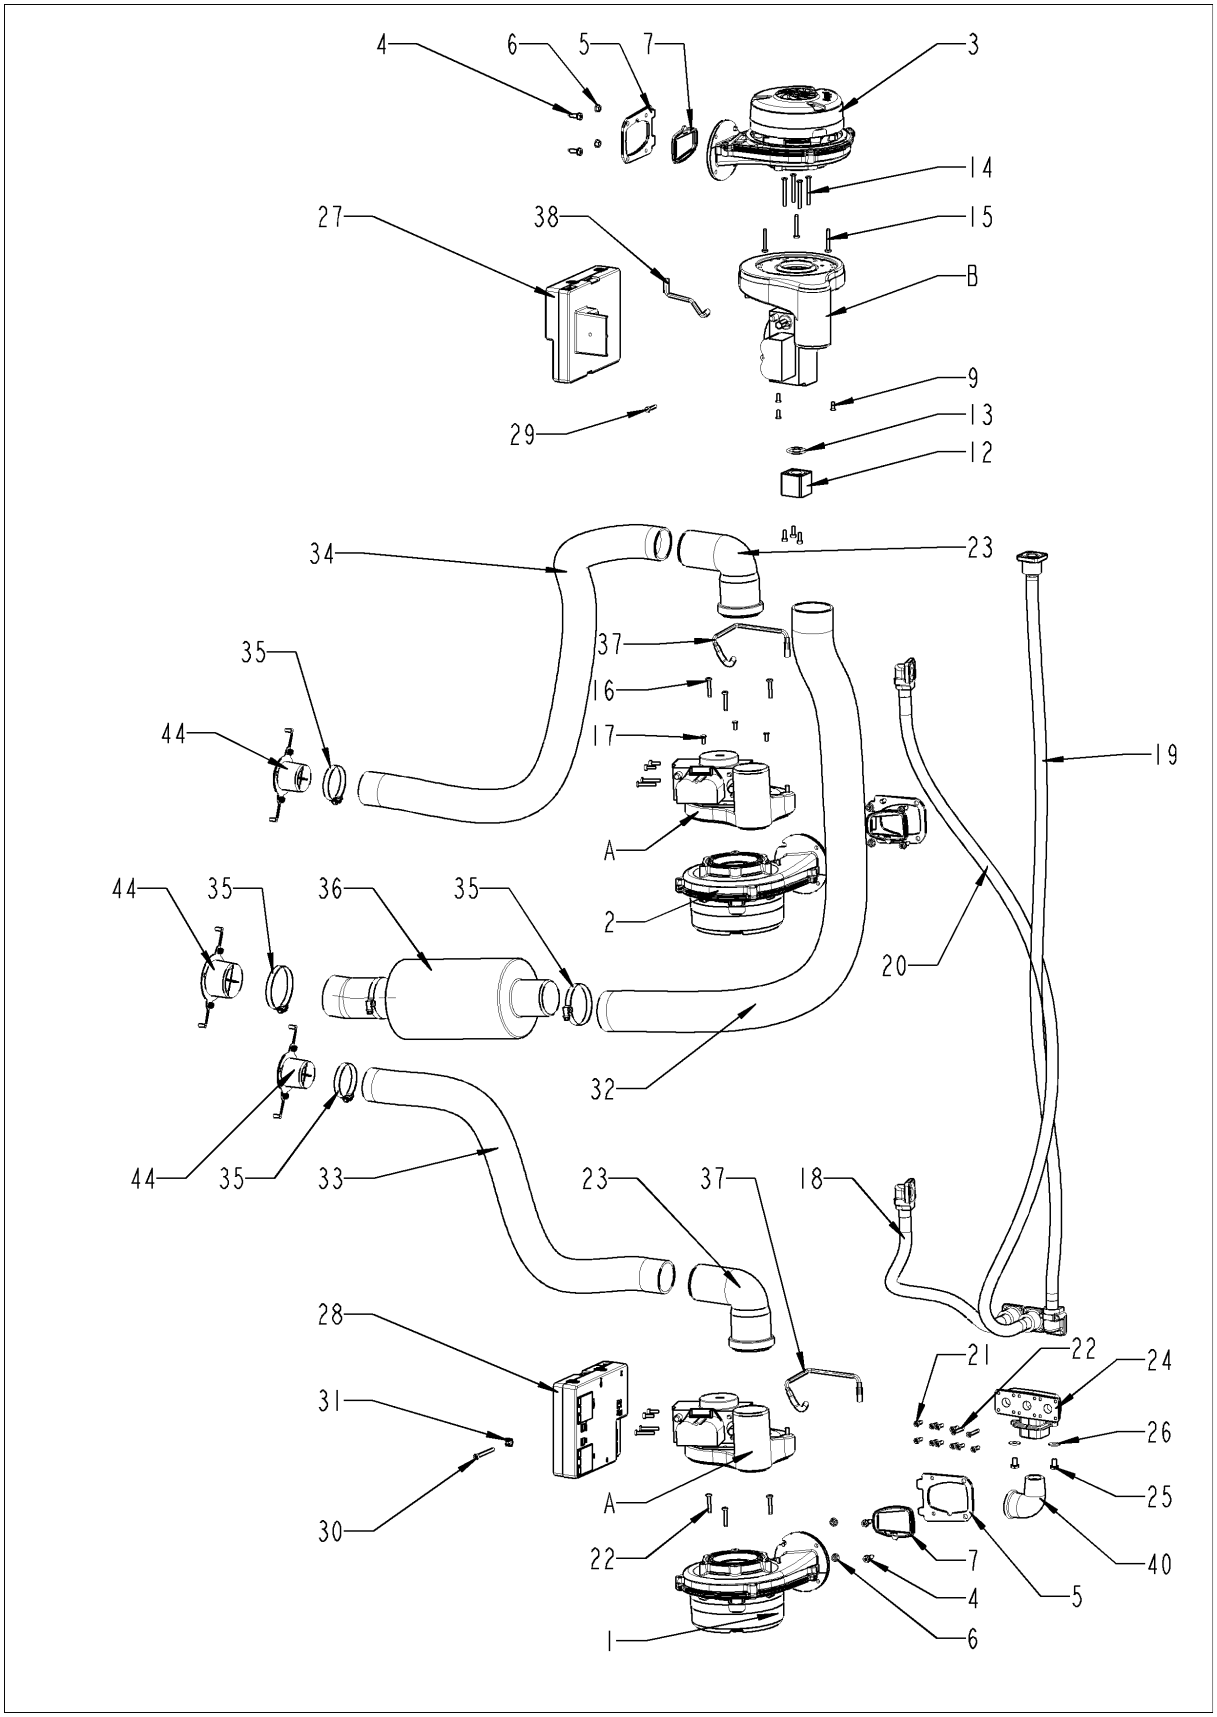
4
6
5
7
3
14
27
38
15
B
9
29
13
12
34
23
37
35
16
44
17
19
A
2
44
35
36
35
20
32
44
35
33
23
37
18
28
21
22
24
31
26
A
25
30
22
7
40
4
5
1
6

# Gas parts

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 70.00.566 | Blower for burner NRG118 | 1 |
| 2 | 70.00.566 | Blower for burner NRG118 | 1 |
| 3 | 70.00.566 | Blower for burner NRG118 | 1 |
| 4 | 10.00.990 | Hex screw M5x16 Torx T20 | 6 |
| 5 | 70.00.495 | Flange f. burner blower RG118 | 3 |
| 6 | 10.01.065 | Hex nut M5 | 6 |
| 7 | 70.00.497 | Gasket f. blower burner | 3 |
| 9 | 10.00.065 | Countersunk screw Torx T20 M4x12 | 3 |
| 12 | 70.00.637 | Spacer sleeve f. gas burner blower | 1 |
| 13 | 70.00.262 | O-ring 21.89x2.62 | 2 |
| 14 | 10.00.068 | Countersunk screw Torx T20 M4x40 | 4 |
| 15 | 10.00.064 | Pan head screw Torx T20 M4x30 | 3 |
| 16 | 10.00.064 | Pan head screw Torx T20 M4x30 | 6 |
| 17 | 10.00.065 | Countersunk screw Torx T20 M4x12 | 6 |
| 18 | 70.00.531 | Corrugated hose 390mm | 1 |
| 19 | 70.00.530 | Corrugated hose 1250mm | 1 |
| 20 | 70.00.201 | Corrugated hose 1050mm | 1 |
| 21 | 10.00.061 | Pan head screw Torx T20 M4x12 | 18 |
| 22 | 10.00.063 | Pan head screw Torx T20 M4x25 | 6 |
| 23 | 70.00.301 | Combustion air angle pipe hot air | 2 |
| 24 | 74.00.881 | Gas connection manifold 3x3/4" | 1 |
| 25 | 1006.0762 | Hex screw M6x10 | 2 |
| 26 | 1306.0222 | Washer A6,4x15x1,5 | 2 |
| 27 | 74.00.883 | Automatic ignition controller | 1 |
| 28 | 74.00.883 | Automatic ignition controller | 1 |
| 29 | 10.00.062 | Pan head screw Torx T20 M4x20 | 1 |
| 30 | 10.00.564 | Pan head screw Torx T20 M4x45 | 1 |
| 31 | 1104.0801 | Cage nut M4 | 1 |
| 32 | 70.00.147 | Air hose D50x1550mm | 1 |
| 33 | 70.00.517 | Air hose D50x1000mm | 1 |
| 34 | 70.00.135 | Air hose D50x1100mm | 1 |
| 35 | 2066.0504 | Hose clamp 40-60mm | 3 |
| 36 | 70.00.703 | Sound absorber blower steam generator | 1 |
| 37 | 70.00.624 | Silicone hose ø8x1,6x141mm | 2 |
| 38 | 70.00.623 | Silicone hose ø8x1,6x115mm | 1 |
| 40 | 70.00.188 | Hose fitting 3/4"-3/4" | 1 |


# Gas parts

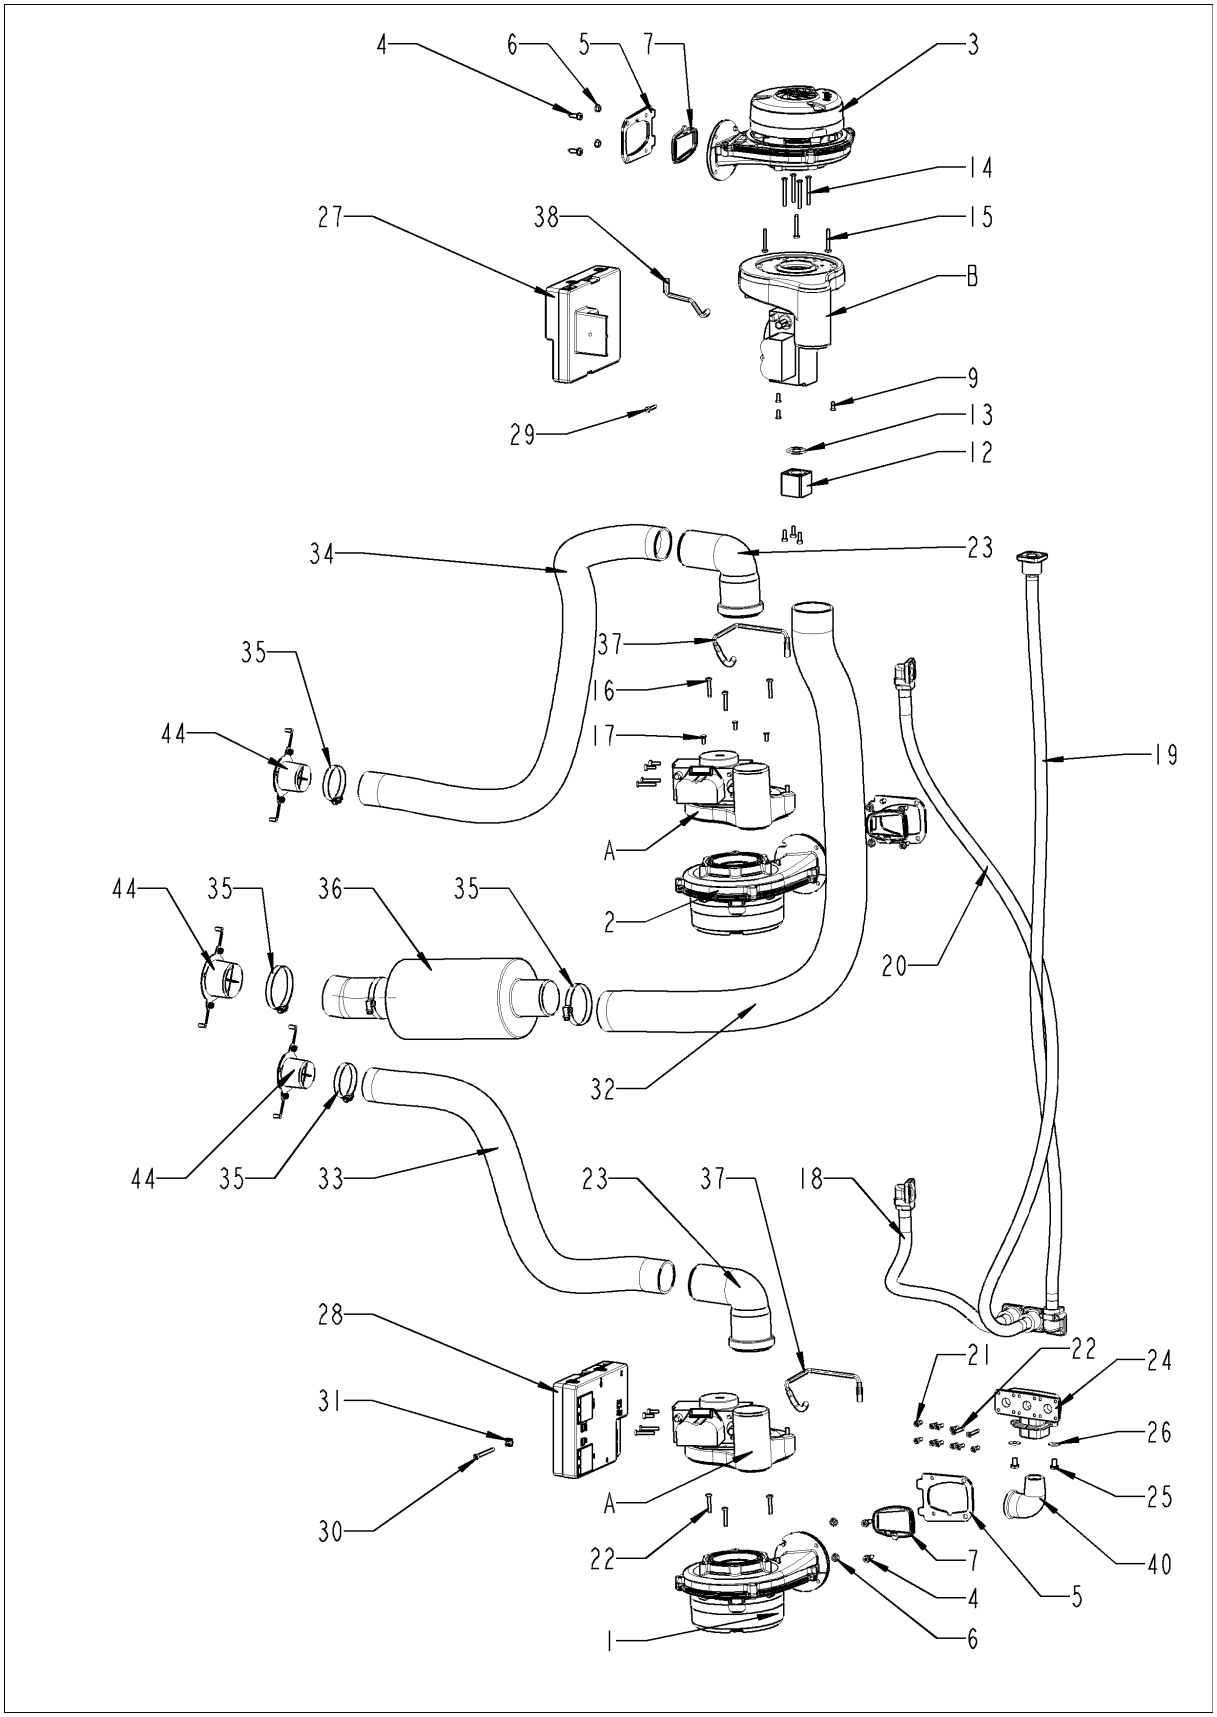
4
6
5
7
3
14
27
38
15
B
9
29
13
12
34
23
37
35
16
44
17
19
A
44
35
36
35
2
20
32
44
35
33
23
37
18
28
21
22
24
31
26
A
25
30
22
7
40
4
5
1
6

# Gas parts

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 41 | 1500.1610 | Pipe 3/4" x 80 | 1 |
| 44 | 70.00.662 | Air hose fixing device 50mm | 3 |
| A | | Gas valve RH | 2 |
| B | | Gas valve SEP | 1 |


# Gas valve

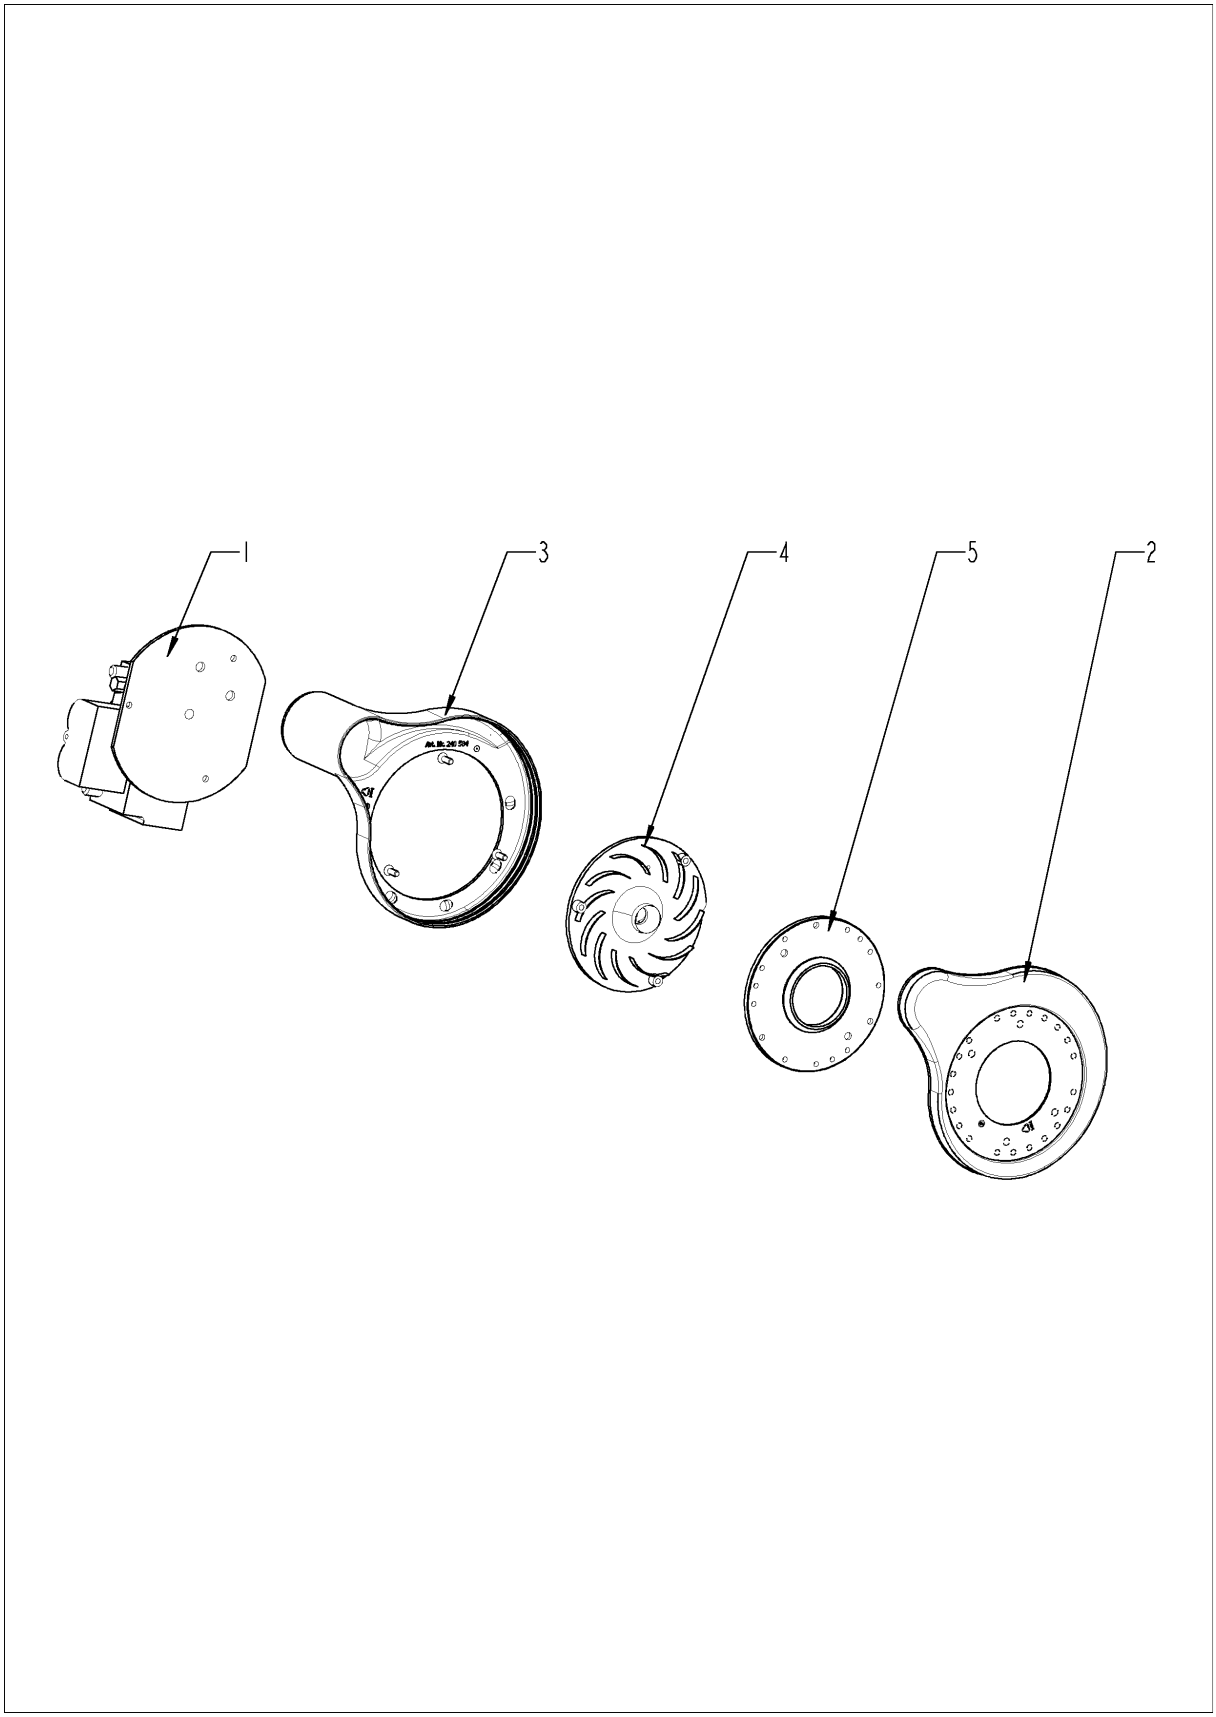

# Gas valve

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 70.00.626 | Gas valve RH | 1 |
| 2 | 70.00.255 | Premix chamber cover gas f. RG130 | 2 |
| 3 | 70.00.030 | Premix chamber gas f. RG130 | 2 |
| 4 | 70.00.106 | Premix disc gas | 1 |
| 5 | 70.00.256 | Disc premix chamber-blower RG130 | 1 |


# Gas valve

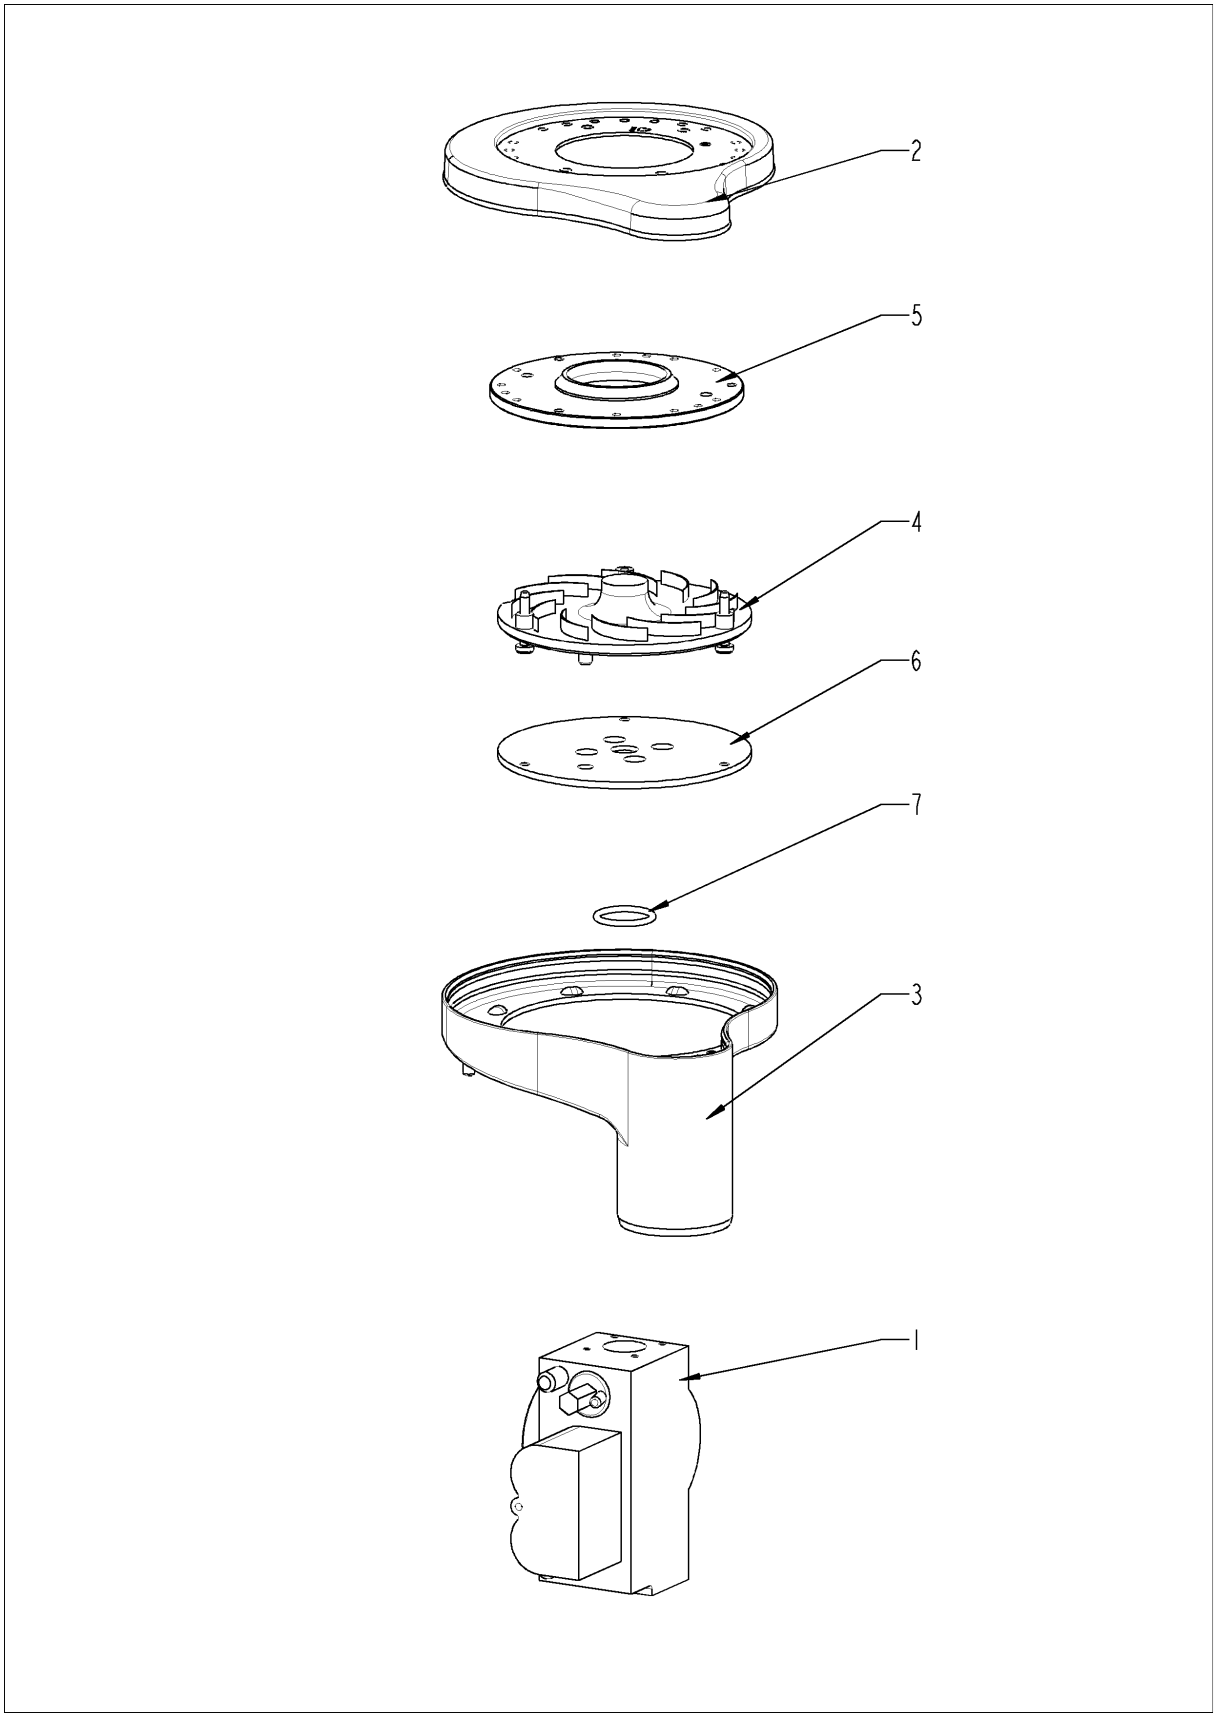

# Gas valve

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 70.00.625 | Gas valve SEP | 1 |
| 2 | 70.00.255 | Premix chamber cover gas f. RG130 | 1 |
| 3 | 70.00.030 | Premix chamber gas f. RG130 | 1 |
| 4 | 70.00.106 | Premix disc gas | 1 |
| 5 | 70.00.256 | Disc premix chamber-blower RG130 | 1 |
| 6 | 70.00.108 | Disc gas valve-premix chamber | 1 |
| 7 | 70.00.261 | O-ring 17x1.5 | 1 |

# Standard accessory

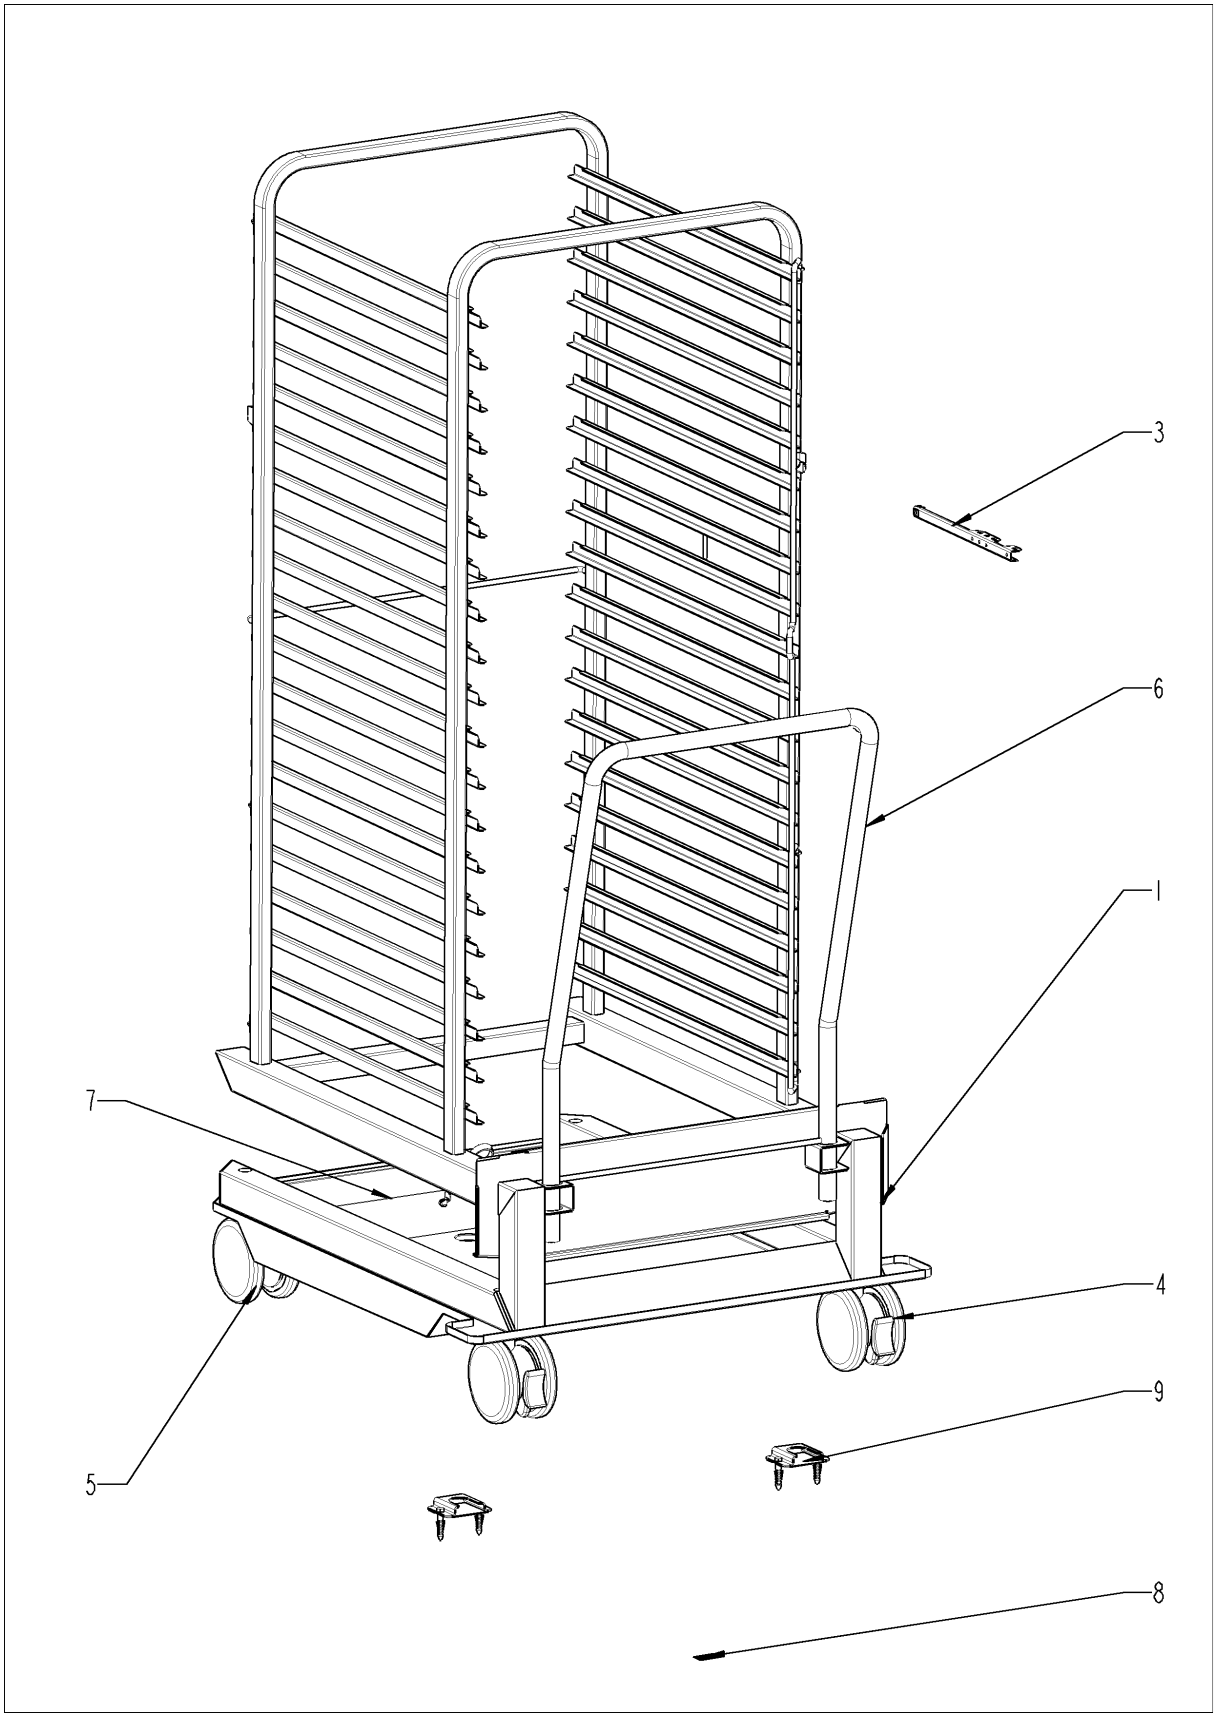

# Standard accessory

| Pos. | Part No. | Description | Qty. |
|---|---|---|---|
| 1 | 60.22.086V | Mobile oven rack type 202 | 1 |
| 4 | 60.60.100 | Castor with brake ø125mm | 1 |
| 5 | 60.60.101 | Castor without brake ø125mm | 1 |
| 6 | 60.22.072 | Handle for mobile oven rack | 1 |
| 7 | 60.22.223 | Drip collector | 1 |
| 8 | 10.01.198 | Sticker set | 1 |
| 9 | 8700.0317 | Floor fixing for units | 1 |
| 10 | 60.71.382 | Water connection kit, floor unit G/USA | 1 |
| 11 | 60.72.406 | Holder for handle mobile oven rack Type 202 | 1 |

# Index


| Part-no. | Description | Page |
|---|---|---|
| 24.00.701 | Additional gasket f. trolly | 29 |
| 22.00.751 | Air baffle | 23 |
| 22.00.781 | Air baffle support | 23 |
| 70.00.517 | Air hose D50x1000mm | 43 |
| 70.00.135 | Air hose D50x1100mm | 43 |
| 70.00.147 | Air hose D50x1550mm | 43 |
| 70.00.662 | Air hose fixing device 50mm | 45 |
| 40.02.684 | Air inlet filter cpl. | 33 |
| 22.00.916 | Air inlet pipe | 11 |
| 22.00.836 | Air sucking ring f. air baffle | 25 |
| 10.00.696 | Allen screw M4x6 w. Precoat 85 | 19, 27 |
| 74.00.883 | Automatic ignition controller | 43 |
| 16.01.844 | Back panel | 33 |
| 54.01.291 | Ball valve drain SCC cpl. | 37 |
| 70.00.566 | Blower for burner NRG118 | 43 |
| 74.00.830 | Burner hot air | 17 |
| 70.00.472 | Burner pipe | 13 |
| 72.00.088 | Burner steam gen. | 13 |
| 40.03.995 | Bus cable 0.85m | 7 |
| 40.04.089 | Bus cable 1.15m | 7 |
| 40.03.996 | Bus cable 1.15m | 7 |
| 56.00.462 | Bushing care container/pump | 41 |
| 20.01.411 | Bushing for motor mounting bar | 21 |
| 10.00.979 | Cable clamp D=22 | 41 |
| 10.00.111 | Cable clip long | 11 |
| 10.00.112 | Cable clip short | 21 |
| 40.00.320 | Cable connection M20x1.5 | 7 |
| 40.03.453 | Cable control harness | 9 |
| 40.04.116 | Cable harness isolating transformer | 9 |
| 40.03.516 | Cable MMI - CPU | 5 |
| 40.03.515 | Cable MMI - TFT | 5 |
| 40.03.467 | Cable On-Off switch MMI | 5 |

# Index


| Part-no. | Description | Page |
|---|---|---|
| 1104.0801 | Cage nut M4 | 43 |
| 10.00.090 | Cap f. Torx T30 | 27 |
| 10.01.076 | Cap nut M5*A2 | 23 |
| 10.00.745 | Cap nut M6*A2 | 31, 33, 35, 37 |
| 56.00.507 | Care container floor unit | 41 |
| 56.00.541 | Care hose 1 | 41 |
| 56.00.420 | Care hose 2 | 41 |
| 60.60.100 | Castor with brake ø125mm | 51 |
| 60.60.101 | Castor without brake ø125mm | 51 |
| 50.00.156 | Clamp f. hand shower roll guide | 37 |
| 10.00.087 | Clamp strap f. sensor | 23 |
| 54.01.191 | Collecting pan | 37 |
| 70.00.301 | Combustion air angle pipe hot air | 43 |
| 2001.0109 | Compression spring | 27 |
| 50.01.213 | Connect. pipe f. hand shower roll guide | 37 |
| 50.01.373 | Connect. pipe f. hand shower roll guide | 37 |
| 40.03.761 | Contactor 3TG1010-3AK2 | 9 |
| 87.01.005 | Control panel insert with overlay *RAT* | 5 |
| 42.00.160 | Control pcb | 7 |
| 42.00.112 | Control pcb *TFT* | 5 |
| 40.03.348 | Control transformer T1 | 9 |
| 40.03.425 | Cooling fan | 7 |
| 40.03.948 | Cooling fan with NTC | 7 |
| 1315.0104 | Copper washer 16x20x1,5 | 23 |
| 70.00.531 | Corrugated hose 390mm | 43 |
| 70.00.201 | Corrugated hose 1050mm | 43 |
| 70.00.530 | Corrugated hose 1250mm | 43 |
| 1005.1966 | Countersunk screw Torx M5x16 | 29 |
| 10.00.065 | Countersunk screw Torx T20 M4x12 | 43 |
| 10.00.068 | Countersunk screw Torx T20 M4x40 | 43 |
| 1003.2265 | Countersunk self tapping screw 4,2x16 | 33 |
| 40.03.366 | Cover air outlet | 31 |

# Index


| Part-no. | Description | Page |
|---|---|---|
| 16.01.910 | Cover f. control pcb w. gasket | 5 |
| 16.00.329 | Cover f. USB interface | 33 |
| 40.03.392 | Cover for air inlet filter | 31 |
| 24.02.263 | Cover for door latch | 33 |
| 16.00.358 | Crossbar front panel | 33 |
| 16.00.331 | Crossbar top | 33 |
| 22.00.361 | Deep-draw f. air baffle | 25 |
| 16.02.062 | Dial f. pulse generator | 5 |
| 70.00.108 | Disc gas valve-premix chamber | 49 |
| 70.00.256 | Disc premix chamber-blower RG130 | 47, 49 |
| 24.00.126 | Door | 27 |
| 24.00.145 | Door bolt | 27 |
| 24.00.048 | Door bolt | 27 |
| 87.00.540 | Door bolt cpl. | 27 |
| 24.01.351 | Door catch | 27 |
| 20.00.399 | Door gasket | 23 |
| 24.00.136 | Door handle | 27 |
| 24.01.350 | Door lock | 27 |
| 24.00.133 | Door mounting support top | 27 |
| 24.00.159 | Door setting bolt | 29 |
| 40.00.454 | Door switch 1.65m | 31 |
| 22.00.958 | Drain hose for humidity control | 11 |
| 44.01.231 | Drain hose steam generator | 13 |
| 60.22.223 | Drip collector | 51 |
| 40.02.515 | Dry up protector 315°F/157°C | 9 |
| 74.00.873 | Earth electrode, hot air | 19 |
| 10.00.661 | Edge protection profile | 37 |
| 10.00.980 | EJOT PT-Screw K30x10 | 41 |
| 10.00.103 | EJOT PT-screw KA 3.5x10 | 33 |
| 10.00.460 | EJOT PT-Screw Torx 3,5x14 | 33 |
| 40.01.483 | Electronic noise filter | 9 |
| 56.00.373 | Emergency overflow-tube | 41 |

# Index


| Part-no. | Description | Page |
|---|---|---|
| 44.00.207 | Emptying pump | 13 |
| 40.03.262 | Fan housing | 33 |
| 40.03.513 | Fan motor | 21 |
| 22.00.829 | Fan wheel | 21 |
| 44.01.371 | Filling level electrode 135mm | 13 |
| 12.01.151 | Fixing angle NSF housing floor units 201-202 | 35 |
| 44.01.181 | Fixing angle steam generator | 13 |
| 40.03.780 | Fixing clip core temp. cable | 25 |
| 40.03.756 | Fixing clip f. pcb | 7 |
| 40.03.533 | Fixing clip f. pcb | 7 |
| 40.01.579 | Fixing clip f. pcb | 9 |
| 24.01.346 | Fixing device f. magnet with magnet, adjustable | 29 |
| 44.01.248 | Fixing device f. pump steam generator | 13 |
| 24.00.507 | Fixing device middle f.inter. glass pane | 29 |
| 44.00.517 | Fixing plate steam generator thermostat | 13 |
| 70.00.495 | Flange f. burner blower RG118 | 43 |
| 22.00.721 | Flange f. motor shaft gasket | 21 |
| 56.00.512 | Flap Care container | 41 |
| 8700.0317 | Floor fixing for units | 51 |
| 2039.0111 | Foot adjustable, metal, 40 x 40 | 31 |
| 40.03.385 | Frame for air inlet filter | 31 |
| 16.01.863 | Front panel | 33 |
| 40.01.487 | Fuse holder 2pol | 9 |
| 40.02.512 | Fuse holder 2x6.3A | 9 |
| 40.01.873 | Fuse SC-15A 10x38 | 9 |
| 74.00.881 | Gas connection manifold 3x3/4" | 43 |
| 70.00.626 | Gas valve RH | 47 |
| 70.00.625 | Gas valve SEP | 49 |
| 74.00.290 | Gasket electrode hot air | 19 |
| 70.00.497 | Gasket f. blower burner | 43 |
| 16.01.579 | Gasket f. breather tube d=79mm | 33 |
| 72.00.067 | Gasket f. burner carrier | 13 |

# Index


| Part-no. | Description | Page |
|---|---|---|
| 74.00.296 | Gasket f. heat exchanger below | 17 |
| 22.00.881 | Gasket f. hum. meas. Pipe | 11 |
| 44.00.250 | Gasket f. ignition electrode | 13 |
| 54.01.168 | Gasket f. inspection lid quenching | 37 |
| 5110.1024 | Gasket for G3/4" threaded joint | 37 |
| 40.00.091 | Gasket frame w. glass a. gaskets | 23 |
| 24.00.194 | Gasket glass pane/trolly | 29 |
| 74.00.869 | Gasket hot air heat exchanger/interior cabinet | 17 |
| 12.01.140 | Gasket NSF housing floor units 201-202 | 35 |
| 2022.0101 | Grommet d8mm | 39 |
| 3024.0201 | Halogen bulb 300°C | 23 |
| 50.00.130 | Hand shower | 37 |
| 50.01.239 | Hand shower roll guide *lead free* | 37 |
| 60.22.072 | Handle for mobile oven rack | 51 |
| 1104.0122 | Hex combination nut M4 galv | 11, 13 |
| 1105.0121 | Hex combination nut M5 galv | 13 |
| 1106.0803 | Hex combination nut M6 galv | 37 |
| 1104.0120 | Hex nut M4 | 13 |
| 1104.0121 | Hex nut M4 self locking | 7 |
| 10.00.916 | Hex nut M4 w. locking | 41 |
| 10.00.100 | Hex nut M4, self-locking | 23 |
| 10.01.065 | Hex nut M5 | 9, 17, 21, 43 |
| 1105.0120 | Hex nut M5 | 13 |
| 10.00.709 | Hex nut M6 w. locking | 9, 13, 21 |
| 3014.0302 | Hex nut M10 for dry-up protector | 9 |
| 3014.0327 | Hex nut M10x1,0 | 9, 23 |
| 10.00.612 | Hex nut M16 flat | 23 |
| 1004.0666 | Hex screw M4x10 | 41 |
| 10.00.697 | Hex screw M5x10 w. precoat 85 | 27 |
| 10.00.990 | Hex screw M5x16 Torx T20 | 43 |
| 1006.0762 | Hex screw M6x10 | 13, 43 |
| 1006.0760 | Hex screw M6x16 | 37 |

# Index


| Part-no. | Description | Page |
|---|---|---|
| 10.00.099 | Hex screw M8x12 | 37 |
| 10.00.565 | Hex screw M8x20 | 21 |
| 1008.0761 | Hex screw M8x25 | 27 |
| 1008.0766 | Hex screw M8x30 | 27 |
| 10.00.445 | Hex screw M8x80 | 7 |
| 1004.2160 | Hex self tapping screw 4,2x16 | 33 |
| 10.00.992 | Hex self tapping screw B4,2x32 | 33 |
| 60.72.406 | Holder for handle mobile oven rack Type 202 | 51 |
| 54.01.045 | Hose 76x5mm | 37 |
| 2066.0205 | Hose clamp 8-16x9 mm SW 7mm | 37 |
| 2066.0521 | Hose clamp 27mm | 41 |
| 2066.0518 | Hose clamp 30mm | 13, 41 |
| 2066.0519 | Hose clamp 35,6mm | 13 |
| 2066.0504 | Hose clamp 40-60mm | 43 |
| 2066.0516 | Hose clamp 60-80 mm | 13 |
| 2066.0505 | Hose clamp 70-90mm | 37 |
| 10.00.983 | Hose clamp CLIC d=23mm | 41 |
| 10.00.984 | Hose clamp CLIC d=27.5mm | 41 |
| 2066.0527 | Hose clamp ø14mm | 11, 15, 37 |
| 2066.0530 | Hose clamp ø16.4mm | 15 |
| 10.00.605 | Hose clamp ø25.3 | 41 |
| 2066.0526 | Hose clamp ø46mm | 13 |
| 70.00.188 | Hose fitting 3/4"-3/4" | 43 |
| 22.00.525 | Hose set f. humidity control | 11 |
| 50.00.548 | Hose ø10x2x500 f. hand shower | 37 |
| 74.00.806 | Hot air heat exchanger below | 17 |
| 74.00.802 | Hot air heat exchanger top | 17 |
| 12.00.897 | Housing f. Cleaning pump | 41 |
| 2062.0333 | Housing for non returne valve | 37 |
| 2070.0054 | HT pipe, DN 50, 250 mm | 35 |
| 22.00.725 | Humidity control cpl. | 11 |
| 44.01.237 | Ignition electrode steam generator | 13 |

# Index


| Part-no. | Description | Page |
|---|---|---|
| 74.00.034 | Ignitionelectrode, hot air | 19 |
| 24.00.212 | Inner glass pane | 29 |
| 22.00.908 | Inner humidity meas. Piece | 11 |
| 54.01.254 | Inspection lid, quenching nozzle, B2 | 37 |
| 40.03.290 | Installation rail for Contactor | 9 |
| 72.00.077 | Insulation f. burner steam gen. | 13 |
| 40.04.047 | Interface cable USB 1.6m | 33 |
| 20.01.755 | Isolation for mounting plate for motor | 21 |
| 2062.0331 | Junction pressure hose GS 10 | 15 |
| 2760.1370 | Latch hook for air baffle | 25 |
| 50.00.086 | Locking plate f. water distribution | 39 |
| 40.03.989 | Loudspeaker K 64 WPT | 7 |
| 74.00.868 | Mating flange heat exchanger | 17 |
| 40.02.101 | Meat probe sensor | 23 |
| 4007.0620 | Membrane DGC 29 | 9 |
| 4007.0621 | Membrane DGC 36 | 9 |
| 42.00.081 | MMI pcb | 5 |
| 60.22.086V | Mobile oven rack type 202 | 51 |
| 22.00.083 | Motor shaft gasket | 21 |
| 50.00.278 | Mounting device f. hand sh. roll guide | 37 |
| 22.00.882 | Mounting device f. pressure sensor | 11 |
| 50.01.543 | Mounting device f. water distribution | 39 |
| 12.00.291 | Mounting for housing of Cleaning pump | 41 |
| 22.00.722 | Mounting support f. gasket flange | 21 |
| 2069.0107 | Non return valve DN6 steam generator | 39 |
| 50.00.078 | Non return valve DW16/DN12 | 39 |
| 50.01.471 | Nozzle f. moistening | 17 |
| 12.01.142 | NSF housing floor units 201-202 | 31 |
| 12.01.154 | NSF housing left floor units 201-202 | 35 |
| 12.01.153 | NSF housing right floor units 201-202 | 35 |
| 70.00.261 | O-ring 17x1.5 | 49 |
| 70.00.262 | O-ring 21.89x2.62 | 43 |

# Index


| Part-no. | Description | Page |
|---|---|---|
| 10.00.512 | O-ring for ball valve drain 26x3.5 | 37 |
| 10.00.511 | O-ring for ball valve drain 46x3.5 | 37 |
| 22.00.837 | O-ring for humidity control | 11 |
| 16.01.965 | Opening mechanism for panel insert | 31 |
| 1008.0768 | Ornamental screw M8x16 | 27 |
| 1008.0769 | Ornamental screw M8x30 | 27 |
| 22.00.850 | Outer humidity meas. Piece | 11 |
| 54.01.117 | Outlet sieve | 23 |
| 10.00.449 | Pan head screw M6x16 | 37 |
| 10.00.365 | Pan head screw Torx M3x20 | 9 |
| 10.00.061 | Pan head screw Torx T20 M4x12 | 43 |
| 10.00.062 | Pan head screw Torx T20 M4x20 | 43 |
| 10.00.063 | Pan head screw Torx T20 M4x25 | 43 |
| 10.00.064 | Pan head screw Torx T20 M4x30 | 43 |
| 10.00.564 | Pan head screw Torx T20 M4x45 | 7, 43 |
| 1500.1610 | Pipe 3/4" x 80 | 45 |
| 56.00.537 | Pipe f. Care hose | 41 |
| 24.01.259 | Plastic buffer 8,1mm for door | 29 |
| 10.00.369 | Plug cone shaped | 37 |
| 50.00.085 | Plug-in spring f. hand shower roll guide | 37 |
| 40.01.596 | Power supply cable 3x2,5mm² 3m | 7 |
| 40.03.468 | Power transformer | 7 |
| 24.00.178 | Pre heat mechanism f. door cpl. | 29 |
| 70.00.255 | Premix chamber cover gas f. RG130 | 47, 49 |
| 70.00.030 | Premix chamber gas f. RG130 | 47, 49 |
| 70.00.106 | Premix disc gas | 47, 49 |
| 2067.0050 | Pressure hose d10mm | 37, 39, 41 |
| 56.00.175 | Pressure hose f. cleaning | 41 |
| 3017.1011 | Pressure sensor for humidity control Huba 401 | 11 |
| 2005.0106 | Protective grid for cooling fan | 7 |
| 40.00.404 | Pulse generator | 5 |
| 2118.1000 | Pump connection spout | 15 |

# Index


| Part-no. | Description | Page |
|---|---|---|
| 8354.1320 | Pump connection spout cpl. | 13 |
| 56.00.460 | Pump f. CareControl DPS 35 | 41 |
| 56.00.186 | Pump f. cleaning UP30 | 41 |
| 40.00.098 | Reflector f. interior light | 23 |
| 10.00.515 | Rivet 3,2x5 A4 | 25 |
| 1603.0166 | Rivet 3,2x7,9 CNS closed | 33 |
| 1604.0167 | Rivet 4x10 | 25 |
| 10.00.041 | Rivet nut M5 hexagon closed | 29 |
| 40.01.482 | Safety temperature limiter 365°C | 9, 23 |
| 40.01.317 | Screen core temperature sensor | 23 |
| 40.03.782 | Screen interior cabinet sensor | 23 |
| 42.00.128 | SD-memory card 4GB | 7 |
| 10.00.991 | Sealing cap | 39 |
| 16.01.908 | Sealing f. panel insert | 5 |
| 16.00.139 | Side panel left | 33 |
| 16.00.158 | Side panel right | 33 |
| 2110.1008 | Silicon hose ø10x2mm | 15 |
| 70.00.623 | Silicone hose ø8x1,6x115mm | 43 |
| 70.00.624 | Silicone hose ø8x1,6x141mm | 43 |
| 50.01.146 | Single solenoid valve | 39 |
| 24.00.147 | Sleeve for door bolt top | 29 |
| 1104.0820 | Snap nut 4,2mm | 33 |
| 70.00.703 | Sound absorber blower steam generator | 43 |
| 10.00.243 | Spacer M4x8 | 7 |
| 70.00.637 | Spacer sleeve f. gas burner blower | 43 |
| 10.01.049 | Square necked mushroom head bolt 6x30 | 21 |
| 1107.0100 | Star lock ø4 | 33 |
| 44.00.948 | Steam generator insolated | 13 |
| 44.00.362 | Steam hose 70x5 | 13 |
| 44.01.086 | Steam pipe | 13 |
| 10.01.198 | Sticker set | 51 |
| 2120.1259 | Stop plug 10mm | 15 |


# Index


| Part-no. | Description | Page |
|---|---|---|
| 56.00.176 | Suction hose f. cleaning | 41 |
| 22.00.491 | Surge guard for Meat probe sensor | 25 |
| 8664.1301 | T-fitting water connection | 37 |
| 40.00.399 | Thermocouple humidity | 23 |
| 40.03.528 | Thermocouple interior cabinet B1 | 23 |
| 40.04.110 | Thermocouple steam generator *B5* | 13 |
| 4005.0101 | Tie rap 145 mm | 15 |
| 1204.0120 | Tooth lock washer A4,3 | 41 |
| 1205.0120 | Tooth lock washer A5,3 | 13 |
| 1206.0120 | Tooth lock washer A6,4 | 31 |
| 16.02.169 | Top cover | 33 |
| 40.03.772 | Transformer f. cooling fan | 7 |
| 50.01.050 | Triple solenoid valve | 37 |
| 16.01.942 | Tulip for handshower | 33 |
| 50.00.846 | Union nut M12x13.2 N | 17 |
| 22.00.767 | Vent cover | 11, 31 |
| 54.00.984 | Ventilation pipe | 37 |
| 8354.1304 | Venting valve for steam generator | 39 |
| 10.00.744 | Washer A4,3 *A4 | 25 |
| 1305.0160 | Washer A5,3x10mm | 27 |
| 1306.0222 | Washer A6,4x15x1,5 | 13, 37, 43 |
| 1308.0162 | Washer A8,4 | 21, 27 |
| 1308.0160 | Washer A8,4 | 37 |
| 60.71.382 | Water connection kit, floor unit G/USA | 51 |
| 50.00.072 | Water distribution vert roll guide con. | 37 |
| 50.00.073 | Water distribution vert w/o roll guide con. | 39 |
| 1900.0202 | Water filter | 39 |
| 50.01.195 | Water volume sensor with wire | 37 |
| 40.03.532 | Wiring interior light | 23 |
| 2062.0303 | Y-fitting YS10 | 39 |


# Deckblatt Elektrische Dokumentation, Cover sheet electrical Documentation

Die Elektrische Dokumentation besteht aus: 1. diesem Deckblatt, 2. dem Schaltplan und 3. der Legende der elektrischen Bauteile
The electric documentation contains: 1. this cover sheet, 2. the wiring diagram and 3. the bill of material (BOM)


| | | | |
|---|---|---|---|
| **Deckblatt-Nr.**<br>**Front Page No.** | 75-21197 | **Version** | 1 |
| **Typ / Type** | SCC WE 202G | | |
| **Schaltplan**<br>**Wiring diagram**<br><br>**Spannung (SPL)**<br>**Voltage** | 76-00488<br><br>2AC208 V 60 Hz | **Version** | 1 |
| **Legende**<br>**Legend electr. components** | 78-00776 | **Version** | 1 |
| **Geräteserialnr.**<br>**Serial number** | G22SH1102 | **Version** | 1102 |
| **Erstellt am**<br>**Created at** | Jul 5, 2011 3:47 PM | **Ersteller**<br>**Creator** | SCHD |
| **Gültig ab**<br>**Valid from** | Aug 30, 2011 3:30 PM | **Änderung**<br>**Modification** | |

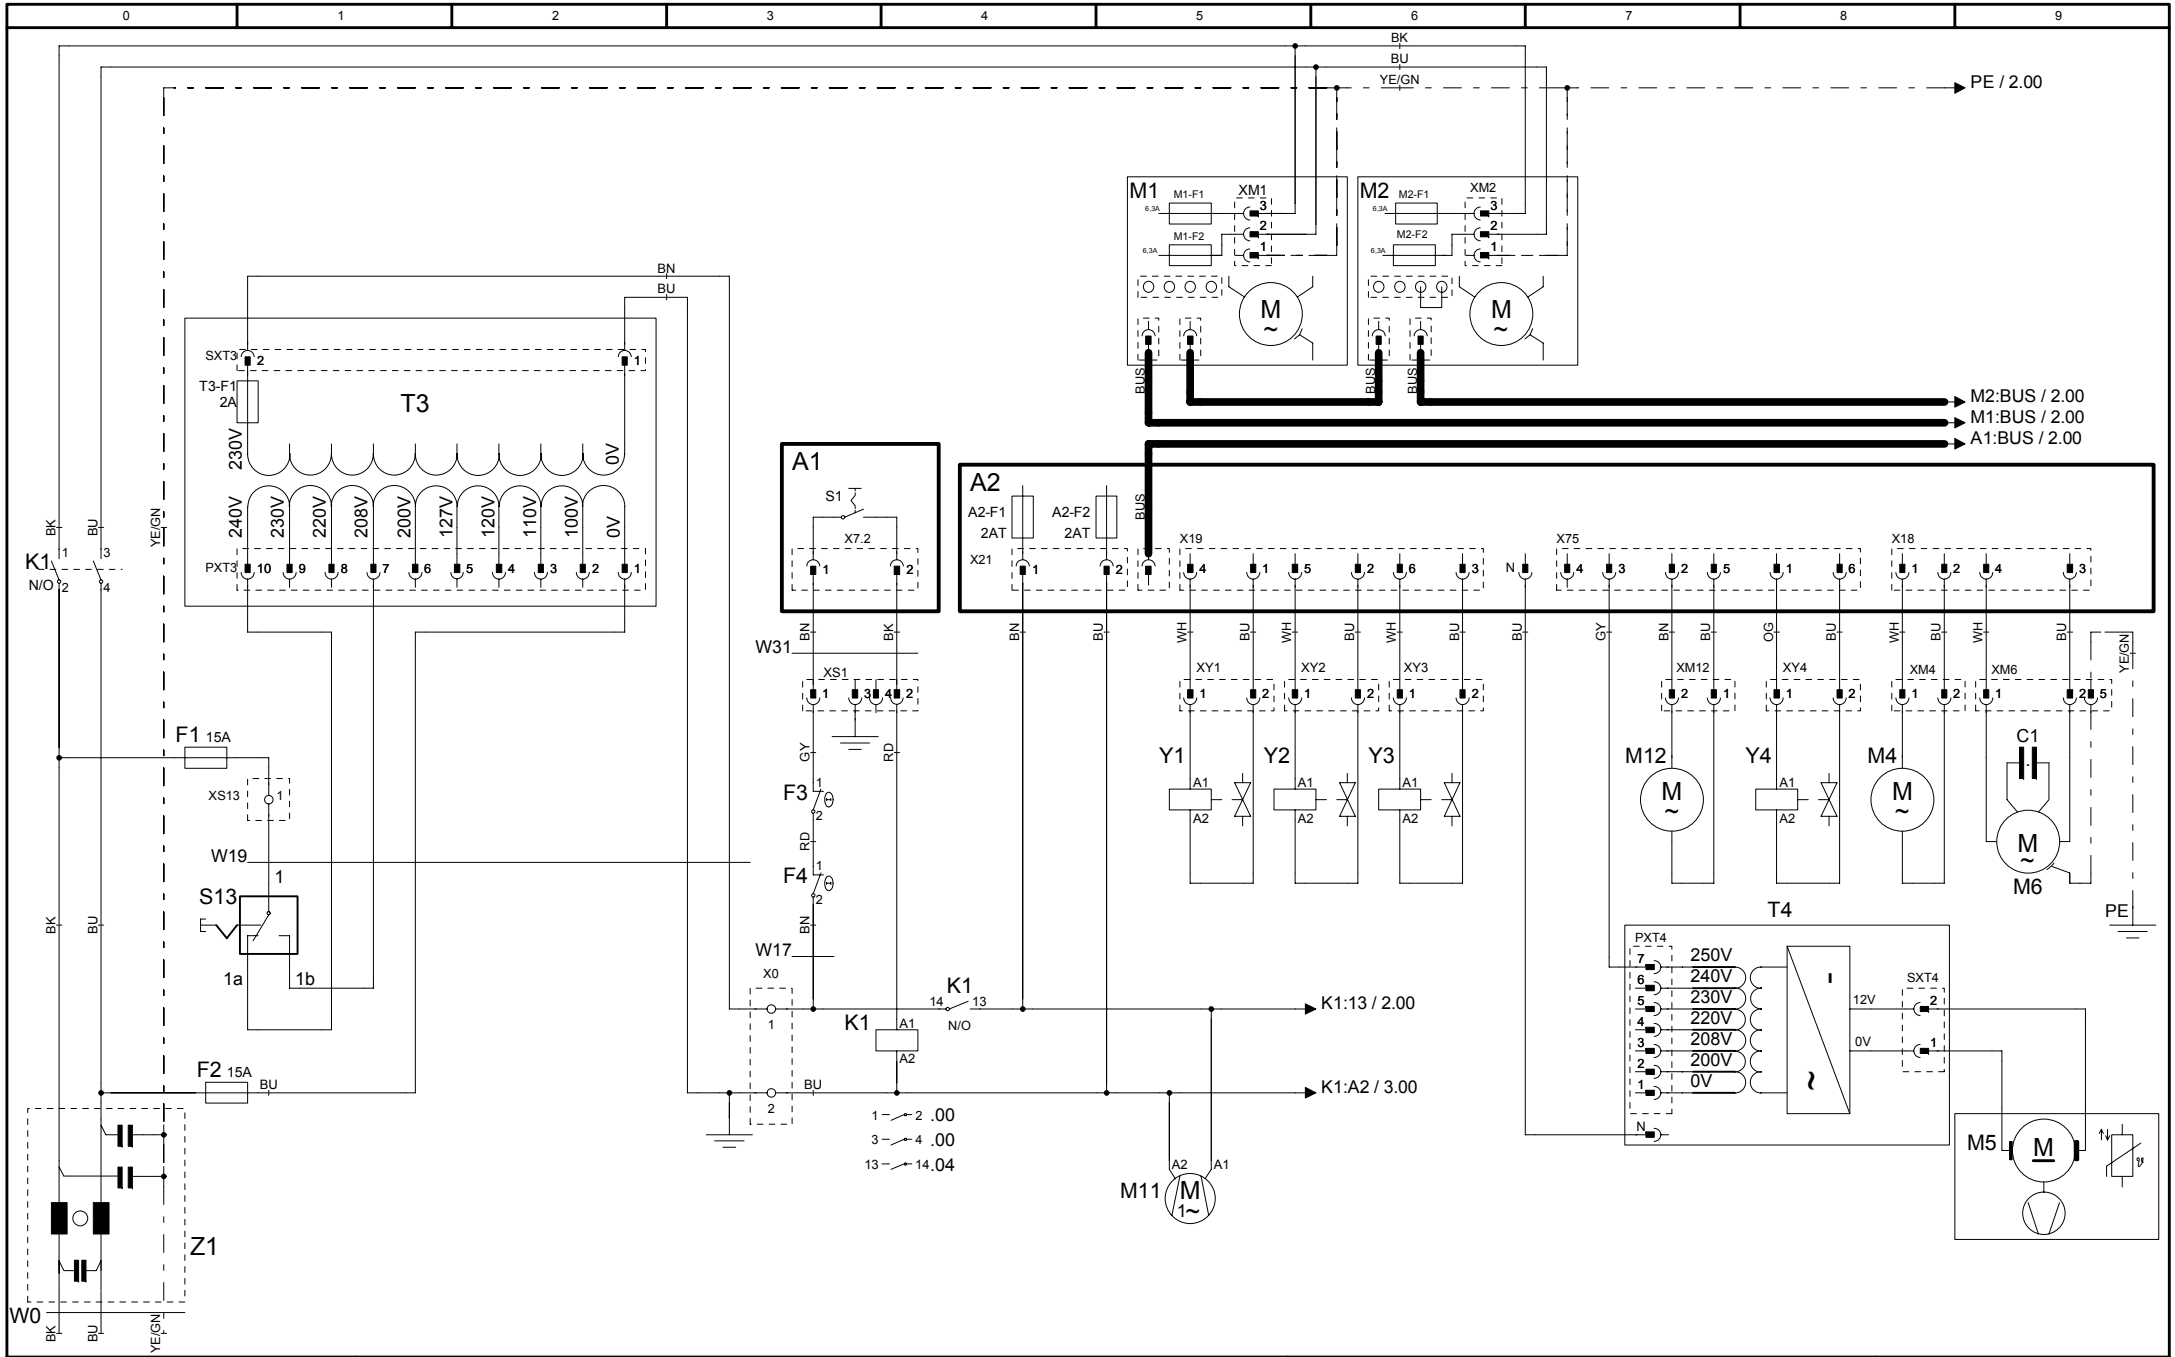


| | | | |
|---|---|---|---|
| 76-00488 | MODUL 1<br>Leistung/Power | SCC WE 202G-UL | Erstellt von / Created by: SCHD |
| Version: 1 | | 2AC208 V 60 Hz | Datum / Date: 12.10.2011<br>Blatt / Page: 1 |

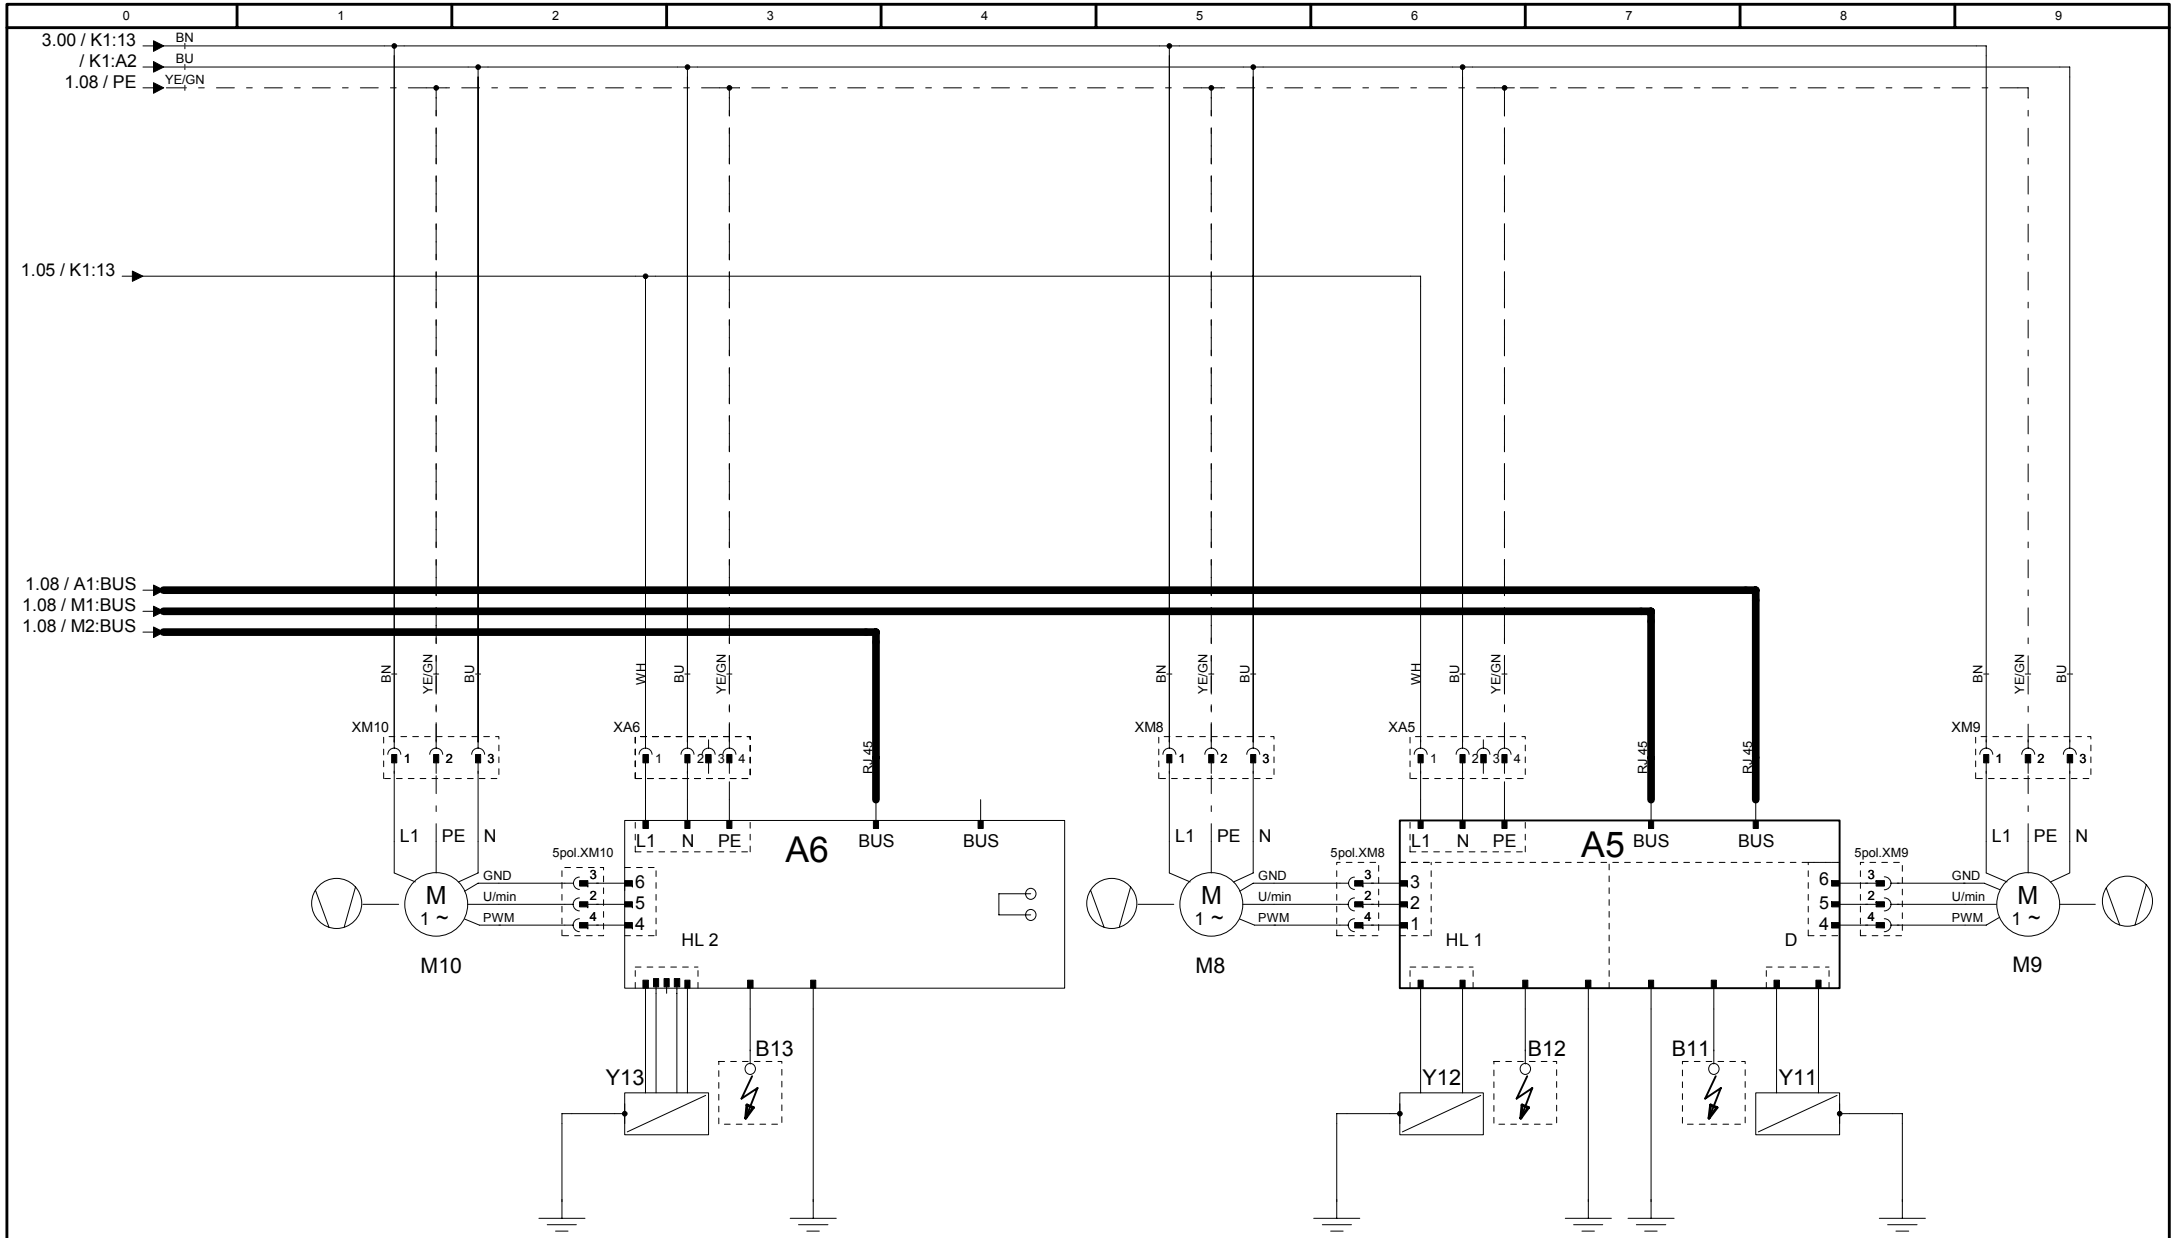


| | | | |
|---|---|---|---|
| 76-00488 | MODUL 2<br>Heizung/Heating | SCC WE 202G-UL | Erstellt von / Created by: SCHD |
| Version 1 | | 2AC208 V 60 Hz | Datum / Date: 12.10.2011 |
| | | | Blatt / Page: 2 |

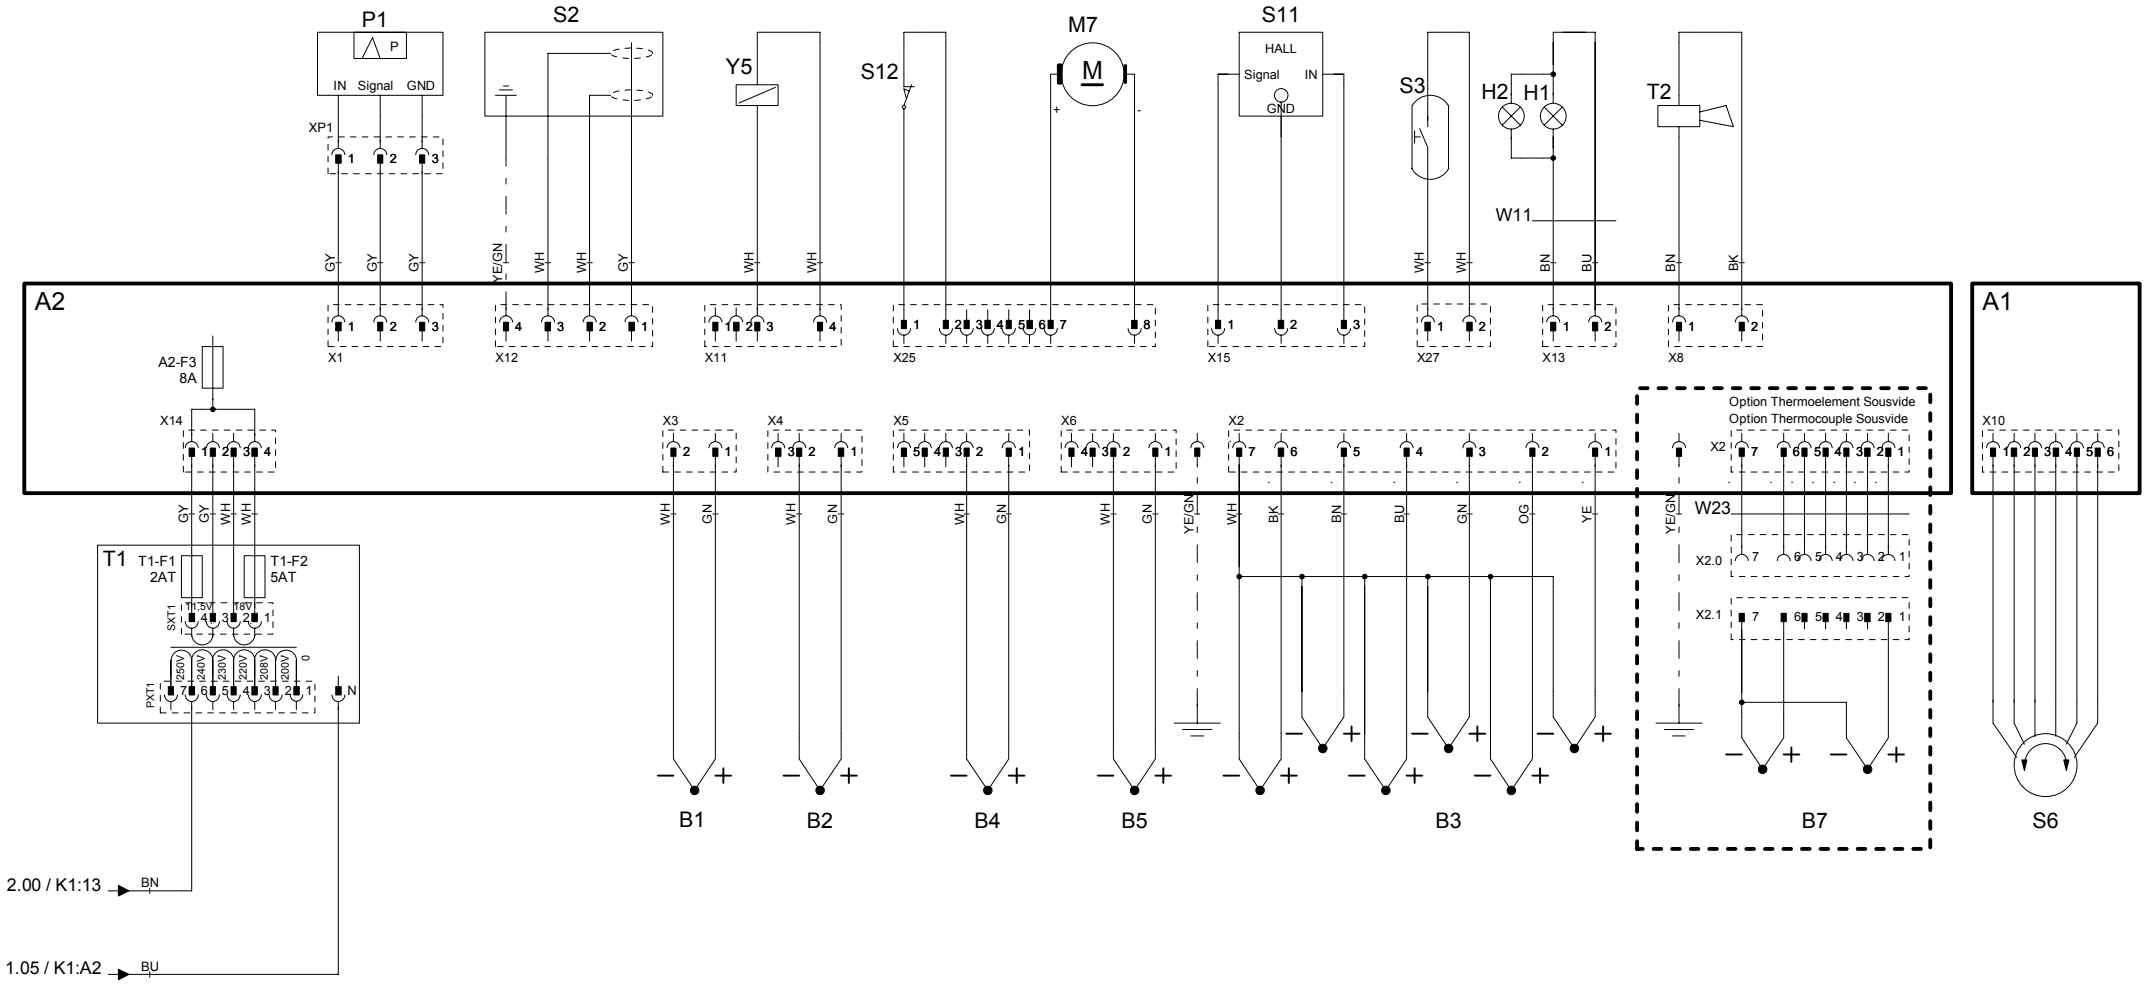


| | | | |
|---|---|---|---|
| 76-00488 | MODUL 3<br>Sensoren/Sensors | SCC WE 202G-UL | Erstellt von / Created by: SCHD<br>Datum / Date: 12.10.2011 |
| Version 1 | | 2AC208 V 60 Hz | Blatt / Page: 3 |

**Positionsliste**

**Bill of material**

| **Name**<br>**Name** | **Artikelnr.**<br>**Item number** | **Artikelbezeichnung** | **Item description** | **Module**<br>**Modul** |
|---|---|---|---|---|
| -A1 | 42.00.081 | Interface Platine | Interface PCB | Modul 1 |
| -A2 | 42.00.160 | CPU SCC WE | CPU SCC WE | Modul 1 |
| -A2-F1/F2 | 3019.0120 | Sicherung A2 - 2AT | Fuse A2 - 2AT | Modul 1 |
| -A2-F3 | 3019.0312 | Sicherung A2 - 8AT | Fuse A2 - 8AT | Modul 3 |
| -A5 | 74.00.883 | Feuerungsautomat Brenner 61-202 | Ignition box | Modul 2 |
| -A6 | 74.00.883 | Feuerungsautomat Brenner 201/202 HL | Ignition box | Modul 2 |
| -B1 | 40.03.528 | Thermoelement Garraum | Thermocouple interior cabinet | Modul 3 |
| -B2 | 54.01.254 | Thermoelement Ablöschung | Thermocouple quenching | Modul 3 |
| -B3 | 40.02.101 | Thermoelement Kerntemperatur | Thermocouple core sensor | Modul 3 |
| -B4 | 40.00.399 | Thermoelement Feuchte | Thermocouple humidity | Modul 3 |
| -B5 | 40.04.110 | Thermoelement Dampfgenerator | Thermocouple steam generator | Modul 3 |
| -F1/F2 | 40.01.873 | Steuersicherung | Control fuse | Modul 1 |
| -F3 | 40.02.515 | Sicherheitstemperaturbegrenzer Gas:157°C/314° F Elek.:183°C/360°F | Safety thermostat steam generator Gas: 157°C/ 314°F Elec.: 183°C/360°F | Modul 1 |
| -F4 | 40.01.482 | Sicherheitstemperaturbegrenzer 360°C/680°F | Safety thermostat interior cabinet 360°C/680°F | Modul 1 |
| -H1 | 3024.0201 | Garraumbeleuchtung | Interior cabinet light | Modul 3 |
| -H2 | 3024.0201 | Garraumbeleuchtung | Interior cabinet light | Modul 3 |
| -K1 | 40.03.761 | Hauptschütz | Main contactor | Modul 1 |
| -M1 | 40.03.513 | Lüftermotor | Fan motor | Modul 1 |
| -M10 | 70.00.566 | Gasgebläse HL | Gas blower hot air (bottom) | Modul 2 |
| -M11 | 40.03.425 | Kühllüfter | Cooling fan | Modul 1 |
| -M12 | 56.00.460 | Pumpe Pflegemittel | Care pump | Modul 1 |
| -M2 | 40.03.513 | Lüftermotor 201/202 (unten) | Fan motor 201/202 (bottom) | Modul 1 |

| | | | | | |
|---|---|---|---|---|---|
| Änderungsdatum | **30.08.2011** | Name | **SCC WE 202G-UL** | Dokument-Nr. | **78-00776** |
| Erzeuger | **SCHD** | Spannung | **2AC208 V 60 Hz** | Version | **1** |

**Positionsliste**

**Bill of material**

| **Name**<br>**Name** | **Artikelnr.**<br>**Item number** | **Artikelbezeichnung** | **Item description** | **Module**<br>**Modul** |
|---|---|---|---|---|
| -M4 | 44.00.207 | SC-Pumpe | SC-pump | Modul 1 |
| -M5 | 40.03.948 | Kühllüfter | Cooling fan | Modul 1 |
| -M6 | 56.00.186 | CleanJet Pumpe SCC WE | CleanJet pump SCC WE | Modul 1 |
| -M7 | 54.01.291 | Kugelhahn Ablauf | Drain valve | Modul 3 |
| -M8 | 70.00.566 | Gasgebläse HL | Gas blower hot air | Modul 2 |
| -M9 | 70.00.566 | Gasgebläse DG | Gas blower steam | Modul 2 |
| -P1 | 3017.1011 | Differenzdrucksensor | Differential pressure sensor | Modul 3 |
| -S1 | TEXT | Ein/Aus Schalter | ON/OFF switch | Modul 1 |
| -S11 | 50.01.195 | CDS-Sensor | CDS-sensor | Modul 3 |
| -S2 | 44.01.371 | Niveauelektrode | Water level electrode | Modul 3 |
| -S3 | 40.00.454 | Türkontaktschalter | Door contact switch | Modul 3 |
| -S6 | 40.00.404 | Zentrales Einstellrad | Central dial | Modul 3 |
| -T1 | 40.03.348 | Steuertrafo | Control transformer | Modul 3 |
| -T1-F1 | 3019.0120 | Sicherung Steuertrafo T1 2AT | Fuse control transformer T1 2AT | Modul 3 |
| -T1-F2 | 3019.0126 | Sicherung Steuertrafo T1 5AT | Fuse control transformer T1 5AT | Modul 3 |
| -T2 | 40.03.989 | SCC WE: Lautsprecher / CMP: Alarmsummer | SCC WE: Speaker / CMP: Buzzer | Modul 3 |
| -T3 | 40.03.468 | Sondertrafo | Special transformer | Modul 1 |
| -T3-F1 | 3019.0120 | Sicherung Sondertrafo T3 | Fuse special transformer | Modul 1 |
| -T4 | 40.03.772 | Trafo Kühllüfter 201/202 | Transformer cooling fan 201/202 | Modul 1 |
| -W0 | 40.01.596 | Anschlusskabel | Cable: power supply | Modul 1 |
| -W11 | 40.03.532 | Kabel: Garraumbeleuchtung | Cable: interior cabinet light | Modul 3 |
| -W17 | 40.03.453 | Kabel: Steuerstamm | Cable: control harness | Modul 1 |
| -W19 | 40.04.116 | Kabel: Zusatzstamm Gas | Cable: power supply gas | Modul 1 |

**Positionsliste**

**Bill of material**

| **Name**<br>**Name** | **Artikelnr.**<br>**Item number** | **Artikelbezeichnung** | **Item description** | **Module**<br>**Modul** |
|---|---|---|---|---|
| -W31 | 40.03.467 | Kabel: Ein/Aus Schalter | Cable: ON/OFF switch | Modul 1 |
| -Y1/Y3/Y4 | 50.01.050 | Y1: Magnetventil Füllen / SCC WE Y3: Beschwadung / Y4: Pflegemittel | Y1: Solenoid valve filling / SCC WE Y3: moistening / Y4: care | Modul 1 |
| -Y11 | 70.00.625 | Gasventil D | Gas valve steam | Modul 2 |
| -Y12/Y13 | 70.00.626 | Y12: Gasventil HL1 / Y13: Gasventil HL2 201/ 202G | Y12: Gas valve hot air / Y13: Gas valve hot air (bottom) | Modul 2 |
| -Y2 | 50.01.146 | Magnetventil Ablöschung | Solenoid valve quenching | Modul 1 |
| -Y5 | 22.00.725 | Klimaventil | Clima valve | Modul 3 |
| -Z1 | 40.01.483 | Entstörfilter/Varistor | Electronic noise filter | Modul 1 |